

(1390 REV. 5-93) US DEPT. OF COMMERCE PATENT &amp; TRADEMARK OFFICE

**TRANSMITTAL LETTER TO THE  
UNITED STATES  
DESIGNATED/ELECTED OFFICE  
(DO/EO/US) CONCERNING A FILING  
UNDER 35 U.S.C. 371**

ATTORNEY'S DOCKET NUMBER  
109503U.S. APPLICATION NO.  
(if known, sec 37 C.F.R.1.5)

09/868322

INTERNATIONAL APPLICATION NO.  
PCT/JP00/07175INTERNATIONAL FILING DATE  
October 16, 2000PRIORITY DATE CLAIMED  
October 18, 1999TITLE OF INVENTION  
DISPLAY DEVICEAPPLICANT FOR DO/EO/US  
Yojiro MATSUEDA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
  - ☐ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
  - ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
    - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☒ has been transmitted by the International Bureau.
    - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
  - ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
  - ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
    - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☐ have been transmitted by the International Bureau.
    - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
    - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventor (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

**Items 11. to 16. below concern other document(s) or information included:**

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.  
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ Entitlement to small entity status is hereby asserted.
16. ☐ Other items or information:

U.S. APPLICATION NO. (if known, see 37 CFR 1.5) <b>09/888522</b>		INTERNATIONAL APPLICATION NO. PCT/JP00/07175		ATTORNEY'S DOCKET NUMBER 109503	
--	--	--	--	---------------------------------	--

17. <input checked="" type="checkbox"/> The following fees are submitted:  <b>Basic National fee (37 CFR 1.492(a)(1)-(5)):</b>  Search Report has been prepared by the EPO or JPO ....\$860.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) .....\$690.00  No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)) .....\$710.00  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO .....\$1,000.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) .....\$ 100.00  <b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>	CALCULATIONS	PTO USE ONLY
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>	\$860.00	

Surcharge of \$130.00 for furnishing the oath or declaration later than <input checked="" type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
--	--	--	--	----	--


  

Claims	Number Filed	Number Extra	Rate		
<b>Total Claims</b>	26 - 20 =	6	X \$ 18.00	\$108.00	
<b>Independent Claims</b>	8 - 3 =	5	X \$ 80.00	\$400.00	
<b>Multiple dependent claim(s) (if applicable)</b>			+ \$270.00	\$	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$1,368.00	
Reduction by 1/2 for filing by small entity, if applicable.				-	\$
<b>SUBTOTAL =</b>				\$1,368.00	
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).				+	\$
<b>TOTAL NATIONAL FEE =</b>				\$1,368.00	
				Amount to be refunded	\$
				Charged	\$

a. <input checked="" type="checkbox"/> Check No. <u>120029</u> in the amount of <u>\$1,368</u> to cover the above fees is enclosed. b. <input type="checkbox"/> Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed. c. <input checked="" type="checkbox"/> The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. <u>15-0461</u> . A duplicate copy of this sheet is enclosed.	<p><b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b></p> <p>SEND ALL CORRESPONDENCE TO:          OLIFF &amp; BERRIDGE, PLC          P.O. Box 19928          Alexandria, Virginia 22320</p> <p>Date: <u>June 18, 2001</u></p>
--	---

  
 NAME: James A. Oliff  
 REGISTRATION NUMBER: 27,075  
  
 NAME: John S. Kern  
 REGISTRATION NUMBER: 42,719

09/868322

JC03 Rec'd PCT/TL 18 JUN 2001

**PATENT APPLICATION**

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Yojiro MATSUEDA

U.S. National Stage of PCT/JP00/07175

Filed: June 18, 2001

Docket No.: 109503

For: DISPLAY DEVICE

**PRELIMINARY AMENDMENT**

Director of the U.S. Patent and Trademark Office  
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

**IN THE ABSTRACT:**

Please replace the Abstract filed with the attached Abstract hereto:

**IN THE SPECIFICATION:**

Please replace the specification with the substitute specification attached herein.

**IN THE CLAIMS:**

Please replace claims 1-26 as follows:

1. (Amended) A display device, comprising:  
a display drive having a plurality of scanning lines and a plurality of data lines  
formed in a grating form corresponding to dots as minimum units of display and active  
elements provided corresponding to intersections, the display drive performs display control  
using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated corresponding to a length in a column direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated corresponding to the length in a row direction of said display drive;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated corresponding to the length in the row direction of said display drive, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

2. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, the display drive performs display control using a liquid crystal by driving said scanning lines and said data lines;



a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated to have a length in a column direction equal to or smaller than a length in a row direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

3. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, the display device emits an organic EL elements connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated corresponding to a length in a column direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated corresponding to the length in the row direction of said display drive;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated corresponding to the length in the row direction of said display drive section, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

4. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated to have a length in a column direction equal to or smaller than a length in the column direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal display that is controlled by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of the display drive, the memory being allocated corresponding to the length in the row direction of said display drive;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects the memory cells for storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cell selected by said column decoder, the column decoder being integrated on a semiconductor or insulating substrate and integrally formed therewith.

6. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal display that is controlled by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive, and each of the memory cells being connected to each of the bit lines;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder, the column selection switch section being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

7. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated corresponding to the length in the row direction of said display drive, and each of the memory cells being connected to each of the bit lines;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects said memory cells storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cell selected by said column decoder, the column selection switch section being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

8. (Amended) A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive and each of the memory cells being connected each of the bit lines;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder, the column selection switch section integrated on a semiconductor or an insulating substrate and integrally formed therewith.

9. (Amended) A display device as claimed in claim 1, wherein the number of said memory cells, which are allocated corresponding to the length in the row direction of said display drive and capable of storing the image signal for display control of the dots on one row of said display drive, is structured redundantly.

10. (Amended) A display device as claimed in claim 1, wherein said memory connects said memory cells in the number capable of storing an image signal for display control of the one-row dots to each of word lines in the number equal to the number of said

scanning lines and is structured with a memory array corresponding to dot arrangement of said display drive, and

a word line driver that selects and drives said word lines are further integrated on and integrally formed with said substrate.

11. (Amended) A display device as claimed in claim 10, wherein, on the basis of an address signal representative of a display position and a storage position, said scanning line driver selects said scanning lines and said word line driver selects said word lines.

12. (Amended) A display device as claimed in claim 11, wherein the same address signal is inputted to said scanning line driver and said word line driver.

13. (Amended) A display device as claimed in claim 11, wherein independent address signals are inputted to said scanning line driver and said word line driver.

14. (Amended) A display device as claimed in claim 11, wherein said scanning line driver operates to select and drive said scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and said word line driver operates to select and drive said word lines on the basis of the address signal only when a word line driver control signal is inputted.

15. (Amended) A display device as claimed in claim 11, said column decoder section selecting the memory cell to store an inputted image signal on the basis of the address signal.

16. (Amended) A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of one-pixel, and said column decoder selects the memory cell in an amount of one pixel.

17. (Amended) A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light

source colors, the image signal is inputted on the basis of a unit of a plurality of pixels, and said column decoder selects the memory cell in an amount of a plurality of pixels.

18. (Amended) A display device as claimed in claim 1, wherein an input interconnection for the image signal to be stored in said memory cell and said column selection switch section are formed on a side opposite to said display drive sandwiching said memory therebetween.

19. (Amended) A display device as claimed in claim 1, wherein said memory is allocated with the memory cell corresponding to the length in the row direction of said display drive and formed in a multi-stage structure.

20. (Amended) A display device as claimed in claim 10, said word lines being provided in the number of integer times the number of the scanning lines, and said memory being structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of said display drive to the word lines in the number of the integer times.

21. (Amended) A display device as claimed in claim 1, wherein said memory is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive and allocated corresponding to the length in the row direction of said display drive.

22. (Amended) A display device as claimed in claim 1, wherein said memory is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive and allocated to have a length in the row direction equal to or smaller than the length in the row direction of said display drive.



23. (Amended) A display device as claimed in claim 22, further comprising:  
a timing controller that controls a timing of transmitting the address signal,

and

a memory controller that controls the transmitting of the image signal, the memory controller being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

24. (Amended) A display device as claimed in claim 1, wherein a D/A converter is provided between said display drive and said memory cell that converts the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to said display drive.

25. (Amended) A display device as claimed in claim 1, wherein said display drive and said memory are directly coupled to supply the image signal comprising a digital signal stored in said memory to said display drive.

26. (Amended) A display device as claimed in claim 25, wherein said display drive performs digital drive through area tonal level, time-division tonal level or a combination thereof.


#### REMARKS

Claims 1-26 are pending. By this Preliminary Amendment, the Abstract, specification and claims 1-26 are amended.

The attached Appendix includes marked-up copies of the substitute specification (37 C.F.R. 1.125(b)(2)) and claims (37 C.F.R. 1.121(c)(1)(ii)).

Should the Examiner believe that anything further would be desirable in order to place this Application in better condition for allowance, the Examiner is invited to contact Applicant's undersigned attorney at the telephone number listed below.

Respectfully submitted,



James A. Oliff  
Registration No. 27,075

John S. Kern  
Registration No. 42,719

JAO:JSK/kap

Attachments:

Substitute Abstract  
Substitute specification along with a marked-up copy showing the changes made thereto

Appendix

Date: 6/18/01

**OLIFF & BERRIDGE, PLC**  
**P.O. Box 19928**  
**Alexandria, Virginia 22320**  
**Telephone: (703) 836-6400**

DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461
--

## ABSTRACT OF THE DISCLOSURE

The invention provides a display device having, integrated on a substrate and integrally formed therewith, an active-matrix LCD section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots, and active elements according to the respective intersections to perform display control using a liquid crystal by driving the scanning lines and the data lines. The display device further including a row decoder for selecting the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for display control of dots in at least one row of a display drive section and allocated corresponding to the length in the row direction of the display drive section. The display device further having a column decoder section for selecting a memory cell to be stored with an inputted image signal, a column selection switch section switching on the basis of a selection by the column decoder section 51 and the image signal and storing the image signal to the memory cell selected, and a k-bit DAC section 41 for driving a data line on the basis of the image signal stored in the memory cell section.

## APPENDIX

## Changes to Abstract:

The following is a marked-up version of the amended Abstract:

———ABSTRACT OF THE DISCLOSURE

———~~To obtain a display device taking into consideration layout efficiency, etc., in the case of integrally forming a peripheral circuit on a glass substrate.~~

The invention provides a display device having, integrated on a substrate and integrally formed therewith, an active-matrix LCD section 2 having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots, and active elements according to the respective intersections to perform display control using a liquid crystal by driving the scanning lines and the data lines. The display device further including a row decoder 31 for selecting the scanning lines, a memory cell section 56 having memory cells that are in the number capable of storing an image signal for display control of dots in at least one row of a display drive section and allocated corresponding to the length in the row direction of the display drive section. The display device further having a column decoder section 51 for selecting a memory cell to be stored with an inputted image signal, a column selection switch section 53 switching on the basis of a selection by the column decoder section 51 and the image signal and storing the image signal to the memory cell selected, and a k-bit DAC section 41 for driving a data line on the basis of the image signal stored in the memory cell section.

## Changes to Claims:

The following is a marked-up version of the amended claims:

1. (Amended) A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and

active elements provided corresponding to intersections, ~~to perform the display drive~~  
performs display control using a liquid crystal by driving said scanning lines and said data  
 lines;

a scanning line driver ~~section that selects and drives said scanning lines, the~~  
scanning line driver being allocated corresponding to a length in a column direction of said  
 display drive ~~section, to select and drive said scanning lines;~~

a memory ~~cell section having a plurality of memory cells that are in the~~  
~~number~~ capable of storing an image signal for performing display control of dots in at least  
 one row of said display drive, ~~the memory being section and~~ allocated corresponding to the  
 length in a row direction of said display drive ~~section;~~

a column decoder ~~section allocated corresponding to the length in the row~~  
 direction of said display drive, ~~section, to select the column decoder selects~~ said memory cells  
 for storing an input image signal;

a column selection switch section allocated corresponding to the length in the  
 row direction of said display drive ~~section, to switch on the basis of a selection by said~~  
 column decoder ~~section and the image signal and storing the image signal to said memory~~  
 cells selected by said column decoder ~~section;~~ and

a data line driver ~~section allocated corresponding to the length in the row~~  
 direction of said display drive, the data line driver drives ~~section, to drive said data lines on~~  
 the basis of the image signal stored in said memory ~~cell section, the data line driver further~~  
being

\_\_\_\_\_ integrated on a semiconductor or an insulating substrate and integrally formed  
 therewith.

2. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, ~~to perform the display drive~~ performs display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver ~~section that selects and drives said scanning lines, the scanning line driver being~~ allocated to have a length in a column direction equal to or smaller than a length in a row direction of said display drive ~~section, to select and drive said scanning lines;~~

a memory ~~cell section~~ having a plurality of memory cells that are ~~in the number~~ capable of storing an image signal for performing display control of dots in at least one row of said display drive, ~~section and the memory being~~ allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive ~~section;~~

a column decoder ~~section~~ allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, ~~section, to select the column decoder selects~~ said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive ~~section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section;~~ and

a data line driver ~~section~~ allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, ~~to drive the data line driver drives~~ said data lines on the basis of the image signal stored in said memory ~~cell section, the data line driver further being~~

—integrated on a semiconductor or an insulating substrate and integrally formed therewith.

3. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, ~~to emit~~ the display device emits an organic EL elements connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver ~~section~~ that selects and drives said scanning lines, the scanning line driver being allocated corresponding to a length in a column direction of said display drive ~~section~~, ~~to select and drive said scanning lines~~;

a memory ~~cell~~ section having a plurality of memory cells that are ~~in the~~ number capable of storing an image signal for performing display control of dots in at least one row of said display drive, ~~section and the memory being~~ allocated corresponding to the length in the row direction of said display drive ~~section~~;

a column decoder ~~section~~ allocated corresponding to the length in the row direction of said display drive, ~~section, to select~~ the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive ~~section~~ to switch on the basis of a selection by said column decoder ~~section~~ and the image signal and storing the image signal to said memory cells selected by said column decoder ~~section~~; and

a data line driver ~~section~~ allocated corresponding to the length in the row direction of said display drive ~~section~~, ~~to drive~~ the data line driver drives said data lines on the basis of the image signal stored in said memory ~~cell~~ section, the data line driver further

being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

4. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver ~~section~~ that selects and drives said scanning lines, the scanning line driver being allocated to have a length in a column direction equal to or smaller than a length in the column direction of said display drive ~~section~~, to select and drive said scanning lines;

a memory ~~cell section~~ having a plurality of memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive, ~~section and the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section;~~

a column decoder ~~section~~ allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, ~~section, to select the column decoder selects~~ said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive ~~section~~, to switch on the basis of a selection by said column decoder ~~section~~ and the image signal and storing the image signal to said memory cells selected by said column decoder ~~section~~; and



a data line driver ~~section~~ allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, ~~section, to drive the data line driver drives~~ said data lines on the basis of the image signal stored in said memory-cell ~~section, the data line driver further being~~  
 \_\_\_\_\_ integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of bit ~~lines~~line, and a liquid crystal ~~controlled in display~~ that is controlled by driving the corresponding ~~said~~ scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory ~~cell section~~ having a plurality of memory cells that are ~~in the~~ ~~number~~ capable of storing an image signal for performing display control of dots in at least one row of the display drive, ~~section and the memory being~~ allocated corresponding to the length in the row direction of said display drive ~~section~~;

a column decoder ~~section~~ allocated corresponding to the length in the row direction of said display drive, ~~section, and to select and~~ the column decoder selects the memory cells for storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive ~~section~~, to switch on the basis of a selection by said column decoder ~~section~~ and the image signal and storing the image signal to said memory cell selected by said column decoder ~~section, the column decoder being~~  
 \_\_\_\_\_ integrated on a semiconductor or insulating substrate and integrally formed therewith.

6. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal ~~controlled in display~~ that is controlled by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory ~~cell section~~ having a plurality of memory cells that are ~~in the number~~ capable of storing an image signal for performing display control of dots in at least one row of said display drive, ~~section and the memory being~~ allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive ~~section~~, and each of the memory cells being connected to each of the bit lines;

a column decoder ~~section~~ allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, ~~section, to select the~~ column decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive ~~section~~, to switch on the basis of a selection by said column decoder ~~section~~ and the image signal and storing the image signal to said memory cells selected by said column decoder ~~section~~, the column selection switch section being

—————integrated on a semiconductor or an insulating substrate and integrally formed therewith.

7. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell ~~section~~ having a plurality of memory cells that are ~~in the~~ ~~number~~ capable of storing an image signal for performing display control of dots in at least one row of said display drive ~~section~~ and ~~the memory being~~ allocated corresponding to the length in the row direction of said display drive ~~section~~, and each of the memory cells being connected to each of the bit lines;

a column decoder ~~section~~ allocated corresponding to the length in the row direction of said display drive ~~section~~, ~~to select~~ the column decoder selects said memory cells storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive ~~section~~, to switch on the basis of a selection by said column decoder ~~section~~ and the image signal and storing the image signal to said memory cell selected by said column decoder ~~section~~, the column selection switch section being ~~integrated on a semiconductor or an insulating substrate and integrally formed therewith.~~

8. (Amended) A display device, comprising:

a display drive ~~section~~ having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell ~~section~~ having a plurality of memory cells that are ~~in the~~ ~~number~~ capable of storing an image signal for performing display control of dots in at least one row of said display drive ~~section~~ and ~~the memory being~~ allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive ~~section~~ and each of the memory cells being connected each of the bit lines;

a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select the column decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section, the column selection switch section

\_\_\_\_\_ integrated on a semiconductor or an insulating substrate and integrally formed therewith.

9. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein the number of said memory cells, which ~~are~~ is allocated corresponding to the length in the row direction of said display drive section and capable of storing the image signal for display control of the dots on one row of said display drive section, is structured redundantly.

10. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein said memory cell section connects said memory cells in the number capable of storing an image signal for display control of the one-row dots to each of word lines in the number equal to the number of said scanning lines and is structured with a memory array corresponding to dot arrangement of said display drive section, and

a word line driver that selects and drives ~~section for selecting and driving~~ said word lines are further integrated on and integrally formed with said substrate.

11. (Amended) A display device as claimed in claim 10, wherein, on the basis of an address signal representative of a display position and a storage position, said scanning line driver section selects said scanning lines and said word line driver section selects said word lines.

12. (Amended) A display device as claimed in claim 11, wherein the same address signal is inputted to said scanning line driver ~~section~~ and said word line driver ~~section~~.

13. (Amended) A display device as claimed in claim 11, wherein independent address signals are inputted to said scanning line driver ~~section~~ and said word line driver ~~section~~.

14. (Amended) A display device as claimed in claim 11, wherein said scanning line driver ~~section~~ operates to select and drive said scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and said word line driver ~~section~~ operates to select and drive said word lines on the basis of the address signal only when a word line driver control signal is inputted.

15. (Amended) A display device as claimed in claim 11, ~~wherein~~ said column decoder section ~~selects~~ selecting the memory cell to store an inputted image signal on the basis of the address signal.

16. (Amended) A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of one-pixel, and said column decoder ~~section~~ selects the memory cell in an amount of one pixel.

17. (Amended) A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of a plurality of pixels, and said column decoder ~~section~~ selects the memory cell in an amount of a plurality of pixels.

18. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein an input interconnection for the image signal to be stored in said memory cell and

said column selection switch section are formed on a side opposite to said display drive section sandwiching said memory cell section therebetween.

19. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein said memory cell section is allocated with the memory cell corresponding to the length in the row direction of said display drive section and formed in a multi-stage structure.

20. (Amended) A display device as claimed in claim 10, ~~wherein~~ said word lines ~~being~~ are provided in the number of integer times the number of the scanning lines, and said memory cell section is being structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of said display drive section to the word lines in the number of the integer times.

21. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated corresponding to the length in the row direction of said display drive section.

22. (Amended) A display device as claimed in claim 1 ~~any one of claims 1 to 8~~, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated to have a length in the row direction equal to or smaller than the length in the row direction of said display drive section.

23. (Amended) A display device as claimed in claim 22 ~~any one of claims 11 to 22~~, further comprising:

a timing controller section ~~for controlling~~ that controls a timing of transmitting the address signal, and

a memory controller that controls the transmitting of~~section for controlling to~~  
~~transmit the image signal, the memory controller being~~  
\_\_\_\_\_integrated on a semiconductor or an insulating substrate and integrally formed  
therewith.

24. (Amended) A display device as claimed in claim 1~~any one of claims 1 to 8~~,  
wherein a D/A converter is provided between said display drive ~~section~~ and said memory cell  
that converts~~section for converting~~ the image signal comprising a digital signal stored in the  
memory cell into an analog signal, followed by supplying to said display drive ~~section~~.

25. (Amended) A display device as claimed in claim 1~~any one of claims 1 to 8~~,  
wherein said display drive ~~section~~ and said memory cell ~~section~~ are directly coupled to supply  
the image signal comprising a digital signal stored in said memory cell ~~section~~ to said display  
drive ~~section~~.

26. (Amended) A display device as claimed in claim 25, wherein said display  
drive ~~section~~ performs digital drive through area tonal level, time-division tonal level or a  
combination thereof.

DISPLAY DEVICE

JC03 Rec'd OCT/ETC

1 8 JUN 2001

BACKGROUND OF THE INVENTION1. Field of Invention

[0001] The present invention relates to display devices. More particularly,  
5 the invention relates to a drive circuit or the like to produce a display on a liquid  
crystal display (LCD) or an organic electro luminescent display (OELD).

2. Description of Related Art

[0002] Recently, the number display devices using liquid crystal (hereinafter  
referred to as display) is increasing rapidly. The display of this type is low in power  
10 consumption and improved in saving space in comparison with a CRT display.  
Accordingly, it is important to make use of the merits of such a display and produce a  
display that is lower in power consumption and improved in saving space.

[0003] Fig. 11 is a block diagram of a system used to produce a display on a  
display device with a TFT display. This system includes an image signal source 100  
15 and a TFT liquid crystal display panel 101. The image signal source 100 is formed, at  
least, by a CPU 100A, a RAM 100B, a frame memory 100C and an LCD controller  
100D. The CPU 100A is an operation controller that transmits display data while  
exchanging data with the RAM 100B as a general-purpose memory. The memory  
RAM 100B is provided not only as a display memory, and hence can require frame  
20 memory 100C to store data for display. The frame memory 100C temporarily stores  
display data for one screen of a liquid crystal panel 101C (hereinafter, the data for one  
pixel is given as display data, and each binary signal forming the display data is  
referred to as an image signal). The LCD controller 100D can implement  
transmission control or the like of display data in order to display in timing the display  
25 data stored in the frame memory 100C in display positions on the liquid crystal panel  
101C. Herein, although the CRT requires the display data to be converted into analog  
data, the display data herein is transmitted by an image signal as digital data on the  
assumption that the interface of the liquid crystal display corresponds to digital data.  
If the image signal is digital data, D/A conversion is not required on the side of the  
30 TFT liquid crystal display panel 101.

[0004] The TFT liquid crystal display panel 101 includes a scanning line  
driver 101A, a digital data driver 101B and a liquid crystal panel 101C. The scanning



line driver 101A controls display in a scanning line (row) direction on the basis of timing data transmitted from the LCD controller 100D. The digital data driver 101B can receive and process digital-data image signal. The digital data driver 101B controls display in a data-line (column) direction on the basis of timing data transmitted from the LCD controller 100D. Thereupon, display tonal level can also be controlled. The liquid crystal panel 101C is a panel having (Thin Film Transistors) TFTs to make display under the control of the scanning line driver 101A and digital data driver 101B.

[0005] In such a system, the LCD controller 100D must transmit to the digital data driver 101B the display-data image signal for the entire screen temporarily stored in the frame memory 100C. Moreover, transmission timing by progressive scanning is fixed. Consequently, there is a need to transmit image signals in timing also for the display data on the pixels not requiring display change. Accordingly, there is an increase in useless data transmission amount, and therefore an increase in power consumption. Thus, reduction of power consumption cannot be achieved.

#### SUMMARY OF THE INVENTION

[0006] Therefore, it is an object of the present invention to obtain a display device of a space-saved design having a structure for achieving consumption-power reduction, and moreover taking into consideration layout efficiency particularly for the case of integrally forming the peripheral circuit over a glass substrate.

[0007] An exemplary display device of the present invention includes a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines, a scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section, a column decoder section allocated corresponding to the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated corresponding to the length in the row

direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, and a data line driver section allocated corresponding to the length in the row direction of the display drive section to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0008] In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate, for example, of a glass substrate, or a quartz substrate, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section, column select switch section and data line driver section.

[0009] It is noted that points allocated corresponding to a length in a column direction and allocated corresponding to a row direction mean that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means that the length in the row direction is equal to or smaller than the length in the row direction of the display drive section. Further, the meaning of equal to or smaller than is either that the both are equal or that the former is small as compared to the latter. In the invention, however, for example the length in the row direction of the memory cell section may be satisfactorily somewhat greater, such as by several percent, than the length in the row direction of the display drive section.

[0010] In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space where no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is relatively longer than the length in the row direction of the display drive section.

[0011] A display device of the present invention can include: a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines, a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a column direction of the display drive section, to select and drive the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0012] In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate for example, of a glass substrate, or a quartz substrate, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

[0013] A display device of the present invention can include a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements

provided corresponding to intersections, to emit an organic EL element connected to the active elements by driving the scanning lines and the data lines to perform display control, a scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning line, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section, a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, and a data line driver section allocated corresponding to the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally form therewith.

**[0014]** In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section.

**[0015]** It is noted that the points allocated corresponding to a length in a column direction and allocated corresponding to a row direction can mean that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this can mean that the length in the row direction is equal to or smaller than the length in the row direction of the display drive section. The meaning of equal to or smaller than is either that the both are equal or that the former is small as compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater, such as by several percent, than the length in the row direction of the display drive section.

**[0016]** In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section.

5 The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

10 **[0017]** A display device of the present invention can include a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to the active elements by driving the scanning lines and the data lines to perform display control, a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a row direction of the display drive section, to select and drive the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

**[0018]** In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for

example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section, in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

[0019] A display device of the present invention can include a display drive section having a plurality of scanning lines and a plurality of bit line, and a liquid crystal controlled in display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section, a column decoder section allocated corresponding to the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, and a column selection switch section allocated corresponding to the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0020] In this invention, where the display drive circuit for display control using a liquid crystal including a peripheral circuit can be integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0021] It is noted that the point allocated corresponding to a row direction means that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means that the length in the row direction is equal to or smaller than the length in the row direction of the display drive section. The meaning of equal to

or smaller than is either that the both are equal or the that former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater, such as by several percent, than the length in the row direction of the display drive section.

5           **[0022]** In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively  
10       broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

**[0023]** A display device of the present invention can include a display drive  
15       section having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal controlled in display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots  
20       in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines, a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the  
25       memory cells for string an input image signal, and a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, integrated on a semiconductor  
30       or an insulating substrate and integrally formed therewith.

**[0024]** In this invention, where the display drive circuit for display control using a liquid crystal including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the

number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0025] A display device of the present invention can include a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of said display drive section, and each memory cell being connected to each of the bit lines, a column decoder section allocated corresponding to the length in the row direction of the display drive section to select the memory cells for storing an input image signal, and a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0026] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0027] It is noted that the point allocated corresponding to a row direction means that, for example in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means that the length in the row direction is equal to or smaller than the length in the row direction of the display drive section. The meaning of equal to



or smaller than is either that the both are equal or that the former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may satisfactorily somewhat greater, such as by several percent, than the length in the row direction of the display drive section.

5           **[0028]** In brief, for the memory cell section for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively  
10       broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

**[0029]** A display device of the present invention can include a display drive  
15       section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form, a memory cell section having memory cells that are in the number capable of storing an image signal for performing  
20       display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines, a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive  
25       section, to select the memory cells for storing an input image signal, and a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section,  
30       integrated on a semiconductor or insulating substrate and integrally formed therewith.

**[0030]** In this invention, where the display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit, by using polysilicon TFTs, memory cells of the memory cell section in the number

capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, and column selection switch section.

[0031] A display device of the present invention structures redundant in the number of the memory cells allocated corresponding to the length in the row direction of the display drive section and in the number capable of storing the image signal for display control of the dots on one row of the display drive section. In this invention, even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display drive section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section).

[0032] In a display device of the present invention the memory cell section can connect the memory cells in the number capable of storing an image signal for display control of the one-row dots to each of the word lines in the number equal to the number of the scanning lines and is structured with a memory array corresponding to dot arrangement of the display drive section, and a word line driver section for selecting and driving the word lines are further integrated on and integrally formed with the substrate.

[0033] In this invention, the memory cell section can be structured by a memory array corresponding to the dot arrangement of the display drive section to store an image signal required for displaying one screen thereby providing a structure capable of reducing data amount externally exchanged and achieving reduction in power consumption. Also, in order to store due to the array structure, the substrate is integrated and integrally formed therewith a word line driver section to select and drive the word lines provided equal in the number to the scanning lines.

[0034] A display device of the invention can include that on the basis of an address signal representative of a display position and a storage position, the scanning line driver section selects the scanning lines and the word line driver section selects the word lines.

**[0035]** In this invention, a scanning line and a word line can be selected randomly by an address signal to secure the freedom in storage or display with respect to the column direction.

**[0036]** A display device of the invention can include that the same address signal is inputted to the scanning line driver section and the word line driver section. In this invention, in order to simplify the interconnections, the same lines can be shared by the scanning line driver section and the word line driver section. Consequently, the same address signal can be inputted in the same timing.

**[0037]** In a display device of the invention independent address signals can be inputted to the scanning line driver section and the word line driver section. In this invention, in order to enhance the freedom in storage and display operations, independent address signals are inputted to the scanning line driver section and the word line driver section, e.g. operation timing can be made different.

**[0038]** In a display device of the invention the scanning line driver section can operate to select and drive the scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and the word line driver section can operate to select and drive the word lines on the basis of the address signal only when a word line driver control signal is inputted. In this invention, in order to simplify the interconnections while enhancing the freedom of storage and display operations, the scanning line driver section can perform selection and driving operations of a scanning lines on the basis of an address signal only when a scanning line driver control signal is inputted and the word line driver section perform selection and driving operations of a word line on the basis of the address signal only when a word line driver control signal is inputted.

**[0039]** In a display device of the invention the column decoder section selects the memory cell to store an inputted image signal on the basis of the address signal. In this invention, the column decoder section can select randomly a memory cell to store an image signal due to the address signal and secure the freedom in storage and display with respect to the row direction.

**[0040]** In a display device of the invention, one pixel can include three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of one-pixel, and the column decoder section selects the memory cell in an amount of one pixel. In this invention, where

the display device performs color displays, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of one-pixel as a display change unit. The column decoder section selects memory cells in an amount of the one pixel on the basis of that input.

[0041] In a display device of the present invention one pixel can include three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of a plurality of pixels, and the column decoder section selects the memory cells in an amount of the plurality of pixels. In this invention, where the display device performs color displays, in order to decrease the drive frequency, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of a plurality of pixels. The column decoder section selects memory cells in an amount of the plurality of pixels on the basis of that input.

[0042] In a display device of the present invention, an input interconnection for the image signal to be stored in the memory cell and the column selection switch section can be formed on a side opposite to the display drive section sandwiching the memory cell section. In this invention, crossover of interconnections is decreased to improve reduction in consumption power. Also, in order to prevent noise superposition due to the effect of switching or the like, the image-signal input interconnections and the column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section.

[0043] In a display device of the invention, the memory cell section is allocated with the memory cell corresponding to the length in the row direction of the display drive section and formed in a multi-stage structure. In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section by the increase of the memory cell in amount of one dot for example due to increase in the number of tonal levels, the structure and the formation is made by providing multi-stages.

[0044] In a display device of the invention, the word lines are provided in the number of integer times the number of the scanning lines, and the memory cell section structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of

the display drive section to the word lines in the number of the integer times. In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section, for example, by memory-cell increase for one dot due to the increase of tonal levels, the structure and the formation is made by providing a plurality of rows.

[0045] In a display device of the invention, the memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated corresponding to the length in the row direction of the display drive section. In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned corresponding to the length in the row direction of the display drive section.

[0046] In a display device of the invention, the memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section. In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section.

[0047] In a display device of the invention, can further include a timing controller section for controlling timing of transmitting the address signal, and a memory controller section for controlling to transmit the image signal, integrated on a semiconductor or an insulating substrate and integrally formed therewith. In this invention, the peripheral circuits required for controlling display are all integrally formed systematically on the same substrate.

[0048] In a display device of the invention, a D/A converter can be provided between the display drive section and the memory cell section, thereby converting the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to the display drive section. In this invention, in order to display in an analog-compatible display drive section, a D/A converter is provided between the display drive section and the memory cell section. In the D/A converter, the image signal after converting into an analog signal is supplied to the display drive section.

[0049] In a display device of the invention, the display drive section and the memory cell section can be directly coupled to supply the image signal comprising a digital signal stored in the memory cell section to the display drive section. In this invention, display is made in the display drive section compatible with digital signals. No D/A converter or the like is provided between the display drive section and the memory cell section. The image signal remained in the digital signal is supplied to the display drive section.

[0050] In a display device of the invention, the display drive section performs digital drive through area tonal level, time-division tonal level or a combination thereof. In this invention, the display drive section compatible with digital signals makes display through area tonal level, time-division tonal level or a combination of the both.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0051] The invention is described in detail with regard to the following figures, wherein like numerals reference like elements, and wherein:

Fig. 1 is an exemplary block diagram representing a concept of a system including a display device according to a first embodiment of the present invention;

Fig. 2 is a diagram representing in detail a panel 1;

Fig. 3 is a diagram representing in detail a panel 1A according to a second embodiment of the invention;

Fig. 4 is a diagram representing in detail a panel 1B according to a third embodiment of the invention;

Fig. 5 is a diagram representing in detail a panel 1C according to a fourth embodiment of the invention;

Fig. 6 is a diagram representing in detail a panel 1D according to a fifth embodiment of the invention;

Fig. 7 is a diagram representing in detail a panel 1E according to a sixth embodiment of the invention;

5 Fig. 8 is a diagram showing a circuit arrangement of an active-matrix OEL section 8;

Fig. 9 is a diagram representing in detail a panel 1F according to a seventh embodiment of the invention;

10 Fig. 10 is a diagram showing a circuit arrangement of an active-matrix LCD section 2A; and

Fig. 11 is a block diagram of a system for display through a display device by a TFT display.

#### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

15 [0052] Fig. 1 is an exemplary block diagram showing a concept of a system including a display device according to the present invention. Fig. 1 represents a concept called system-on-panel (SOP). SOP is the concept to form a peripheral circuit for display or the like over a glass substrate, and moreover to integrally form TFTs or the like together with the peripheral circuit by the use of poly-silicon or the like without using chips of ICs or the like. Due to this, the panel can be directly  
20 coupled to the CPU while achieving low cost, high reliability and space saving.

[0053] In Fig. 1, an image signal source 110 is configured by a CPU 110A to transmit display data. Herein, the display data is transmitted with image signals as digital data, similarly to the conventional configuration shown in Fig. 11. If the image signal is digital data, D/A conversion is not required on the side of a panel 1,  
25 correspondingly achieving the reduction in size and power consumption. Meanwhile, the panel 1 can be configured with an active-matrix LCD section 2, a scanning line driver 3, a digital data driver 4, a frame memory section 5, a memory controller 6 and a timing controller 7. The active-matrix LCD section 2 corresponds to a display drive section in the present invention.

30 [0054] Fig. 2 is a figure representative in detail of the panel 1. The active-matrix LCD section 2 is a part for actual display by use of active elements of TFTs, diodes or the like. The active-matrix LCD section 2 is arrayed with pixels in the number of  $i \times j$ . Because the present embodiment assumes a color display, three dots

(known also as sub-pixels) of R (Red), G(green) and B(Blue) as light-source colors are constituted as one pixel. For a monochromatic display, the pixel equals to the dot. The dot areas include data lines, scanning lines and active elements (e.g. switching elements by transistors, diodes or the like) arranged corresponding to the intersections of them. The active elements respectively have pixel electrodes to form a capacitance through a liquid crystal to a counter electrode. The voltage applied between the pixel electrode and the counter electrode controls the optical rotatory power due to liquid-crystal molecules, making display control on each dot. Moreover, even if the active element turns off the switch, the pixel electrode can sustain its displaying state owing to the storage charge before refreshing (display data rewriting) in the next time. The switch operation to the active elements and control of the charge supply to the pixel electrodes are implemented by driving a data line and scanning line (supplying current).

**[0055]** It is a scanning line driver 3 that controls to drive a scanning line.

The scanning line driver 3 is formed by a row decoder 31 and a scanning line drive buffer 32. The row decoder 31 selects a scanning line to be driven on the basis of address data inputted. The scanning line drive buffer 32 actually drives the scanning line selected by a column decoder 31.

**[0056]** Meanwhile, it is a digital data driver 4 that controls to drive a data line. The digital data driver 4 is formed by a k-bit DAC section 41 as a D/A converter. Herein, a frame memory section 5 will be explained before explaining the operation of the k-bit DAC section 41.

**[0057]** The frame memory section 5 is configured by a column decoder 51, an input control circuit 52, a column selection switch section 53, a memory row decoder 54, a word driver 55, a memory cell section 56 and a sense amplifier section 57. The column decoder 51 selects one pixel out of one row (line) of pixels (in the number of j) on the basis of input address data. This ultimately results in selection of a to-be-driven data line. The input control circuit 52 is a circuit to control an image signal ( $k \times 3$ ) in one-pixel amount transmitted in parallel from the memory controller 6. The column selection switch section 53 is provided in the number of pixels on one line (i.e.  $k \times 3 \times j$ ) with reference to one-pixel image signal ( $k \times 3$ ) as a unit. Each column selection switch performs switching on the basis of column decoder 51 selection and image signal, driving a bit line. Herein, the input control circuit 52 and



column selection switch section 53 is arranged on a side opposite to the active-matrix LCD section 2 while sandwiching the memory cell section 56. This reduces interconnection crossing over, thus achieving simplification and consumption-power reduction. Moreover, by the operation of the input control circuit 52 and column selection switch section 53, no noise will be interposed over the analog-driven LCD 2. Thus, noise reduction in display can be achieved.

[0058] The memory row decoder 54 selects a word line on the basis of input address data, in order to store to a desired memory cell of the memory cell section 56 forming the memory array, as described later. The word driver 55 actually drives a word line selected by the memory row decoder 54. Consequently, the image signal is stored as the pixel display data to the memory cells in the number of  $k \times 3$  that are connected to the word line selected by the memory row decoder 54 and corresponding to the pixels selected by the column decoder 51.

[0059] Meanwhile, the memory cell section 56 has memory cells in the number of  $k \times 3 \times i \times j$  to constitute a memory array of  $i$ -lines  $\times k \times 3 \times j$ -columns. This number of memory cells is the number required for each dot of R, G or B of the display having a screen of  $i \times j$  pixels to make display with brightness in a tonal level of  $2k$ . In Fig. 2,  $k = 3$  is given to enable setting with eight tonal-levels of brightness. This number of memory cells is the number of memory cells required, at least, to store an image signal in amount of one screen. For example, in some circuits, a circuit configuration is given with redundant memory cells for the necessity of securing operation stability.

[0060] Herein, space saving can be achieved to a greater extent as the size of the glass substrate become equal to the size of the active-matrix LCD section 2 as an actual display part. In other words, if the memory cells are arranged such that the length of the memory cell section 56 in the row direction is equal to or smaller than the length of the active-matrix LCD section 2 in the row direction, the memory cells in one column can be arranged most efficiently with a saved space width. Consequently, because the length of memory-cell arrangement in the row direction required to control 1-dot display is equal to or smaller than a pitch of dots, the length of the entire frame memory section 5 in the row direction is given equal to or smaller than the length of the active-matrix LCD section 2 in the row direction. Accordingly, design is made in Fig. 2 such that the length in the row direction of  $k$ -bit memory cell

arrangement equals to each pitch of dots. Each sense amplifier (or selection switch) of the sense amplifier section 57 and each k-bit DAC of the k-bit DAC section 41 are also designed based upon each pitch of dots.

[0061] Also, the number of rows of the memory array is made equal to the number of scanning lines (i) so that the memory frame section 5 can store display data in amount of 1 screen. Consequently, it is possible to carry out storage with correspondence between a display-positioned pixel and a memory cell provided on a dot-by-dot basis. In order to achieve only space saving, it is satisfactory to have at least one row of memory cells without the especial necessity of constituting a memory array having the number of rows equal to the number of scanning lines. However, in order to reduce the data transmission amount over the system overall and lower consumption, memory cells are required in amount enough to store display data in amount of 1 screen with correspondence. Accordingly, an image signal in amount of display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU 110A. If no rewriting is made, the digital data driver 4 satisfactorily deals with the image-signal data stored in the memory cell section 56 as it is.

[0062] Each sense amplifier constituting the sense amplifier section 57 is connected on column (bit line)-by-column basis. Herein, the use of the sense amplifier is for the case each memory cell of the memory cell section 56 is configured by a dynamic memory. In the case of configuration with a static memory, selection switches are used in configuration instead of sense amplifiers.

[0063] The k-bit DAC section 41 constituting the digital data driver 4 is configured by k-bit DACs in the number of  $3 \times j$ . Each k-bit DAC is inputted with digital data based on the image signal stored on certain memory cells in the number of k through the bit lines in the number of k. The k-bit DAC converts the data-based value into a tonal level, depending upon which tonal level a data line is driven. In the LCD, alternating-current drive is required for the purpose of extending the life of liquid crystal. Accordingly, digital data cannot be used as it is but must be converted to analog. In this manner, display control is made, on the basis of display data, on the dot at an intersection of a driven scanning line and a data line.

[0064] Herein, the digital data driver 4 and the frame memory section 5 of the invention are directly coupled (integrated) to drive-operate the data line by the direct use of stored digital data. Accordingly, for convenience (in relation to Fig. 1),

the digital data driver 4 is configured by the k-bit DAC section 41, and the frame memory section 5 is configured by the column decoder 51, the input control circuit 52, the column selection switch section 53, the memory row decoder 54, the word driver 55, the memory cell section 56 and the sense amplifier section 57. However, it is to be understood that such distinction cannot be exactly made if considering the operational relationship between the digital data driver and the frame memory in the conventional use.

**[0065]** The memory controller 6 controls as  $k \times 3$  image signals in order to store the display data transmitted from the CPU 110A into the frame memory section 5. Also, the timing controller 7 has at least an address buffer 71 and transmit an address signal to the row decoder 31, column decoder 51 and memory row decoder 54 in order to store or display the display data transmitted from the CPU 110A.

**[0066]** In the case of configuring the memory by chips or the like, it is problematic in what way fine provision can be made within the chip and layout be given by taking interconnection into consideration. Where the peripheral circuit such as the memory on a glass substrate, conception differs from that. It is the active-matrix LCD section 2 as an actual display part that occupies over the greatest area on the glass substrate. Moreover, the pitch of pixels (ultimately the entire size) is fixed. Consequently, it is the problem that the system, such as peripheral circuits, is laid out with efficiency in accordance with the size. Although the memory cells can be lessened if considering space saving without considering consumption power, the reduction of consumption power requires memory cells for storing data in amount of one screen. Therefore, the present embodiment aims at presenting the most efficient layout on the basis of establishing a peripheral circuit in order for reducing consumption power.

**[0067]** Next, explanation will be made on the operation of the display as shown in Fig. 2. The CPU 110A transmits display data in order to provide change in display. Consequently, where the image does not change, no display data is transmitted. When changing the display, an address signal is transmitted representative of a point (pixel) to be changed in display. Also, a display-data image signal is transmitted. Herein, the frame memory section 5 is provided with word lines corresponding in number to scanning lines, in order to enable it to store display data (image signal) in amount of one screen corresponding to the respective dots.

Moreover, the row decoder 31 and the memory row decoder 54 are provided to enable selection of a scanning line and word line. Accordingly, a scanning line can be selected and driven randomly according to an address signal without requiring sequential scanning, which is convenient for rewriting display data as required. Also, in order to achieve space saving by simplifying the interconnections and reducing the circuit area, the same address signal is inputted to the row decoder 31 and the memory row decoder 54, respectively causing the corresponding sections to store and display in the same timing. As for the column decoder 51, random pixel selection can be made according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line.

**[0068]** In the case of not providing change in display, the digital data of the image signal stored in the frame memory section 5 is used as it is for making display, wherein no data transmission and reception is made to and from the CPU 110A. However, because the LCD requires alternating-current drive, there is a need of drive using pixel-inversion drive while refreshing at least at a required minimum frequency. This control is made with the scanning line driver 3 and the digital data driver 4. If the frequency is lowered, consumption-power reduction can be made, however some flicker may occur due to punch-through voltage or the like. Therefore, in order to make the flicker unnoticeable while reducing power consumption, the state of display is maintained with refreshing at a frequency, for example, of 30 Hz for still images (liquid crystal driven at 15 Hz).

**[0069]** As concerned with the frame memory section 5, if the memory cells are constituted by static memories, there is no need to rewrite data (refresh). However, if constituted by dynamic memories, there is a necessity of refreshing in such timing as can hold the storage.

**[0070]** As above, according to the first embodiment, where a system including not only a display part but also peripheral circuit on a substrate, as in SOP, is integrally formed on a substrate, in the memory cell section 56 of the frame memory section 5, memory cells are formed to be arranged such that the length in the row direction of arrangement of memory cells with an amount required for controlling one-dot display is equal to or smaller than a pitch of dots, i.e., the length in the row direction of the memory cell section 56 is equal to or smaller than the length in the

row direction of the active-matrix LCD section 2. Accordingly, it is possible to arrange memory cells in amount of one row with saved space width.

[0071] Also, this is similarly made for the sense amplifier section 57 and k-bit DAC section 41, achieving space saving.

5 [0072] Also, the number of rows of the memory array is given the same as the number of scanning lines (i) to enable the frame memory section 5 to store display data (image signal) in amount of one screen. Accordingly, it is possible to store data in amount of one screen with correspondence between the pixel in each position and the memory cell of the memory cell section 56. The image signal only in amount of display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU 10 110A. Accordingly, the data transmission amount over the entire system can be decreased, and space-saved forming can be made with the maximum efficiency while achieving the reduction of power consumption.

[0073] Also, because the row decoder 31 and the memory row decoder 54 15 are provided to enable selection of a scanning line and word line to be driven on the basis of an address signal, a scanning line can be selected and driven randomly according to an address signal without the necessity of sequential scanning. This is convenient for rewriting display data as required.

[0074] Also, because the same address signal is inputted to the row decoder 20 31 and the memory row decoder 54 to cause the respective corresponding points to perform storage and display in the same timing, space saving can be made due to simplification of interconnections and reduction of circuit area.

[0075] Also, because the row decoder 51 can randomly select a pixel 25 according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line. This is convenient for rewriting display data as required.

[0076] Also, because the input control circuit 52 and the column selection switch section 53 are arranged on a side opposite to the active-matrix LCD section 2 sandwiching the memory cell section 56, crossover of interconnections is decreased 30 thus achieving simplicity and consumption-power reduction. Moreover, there occurs no noise superposition over the analog-driven LCD 2 due to operation of the input control circuit 52 and column selection switch section 53, thus reducing noise in display.

[0077] Furthermore, because the memory controller 6 and the timing controller 7 are integrally formed on the panel 1, the panel 1 can be directly coupled to the CPU 110A, thus providing cost reduction, reliability and space saving for the system entirety.

5 [0078] Fig. 3 is a figure showing in detail an exemplary panel 1A according to a second embodiment of the invention. The panel 1A of Fig. 3 differs from the panel 1 of Fig. 2 in that address signals are independently inputted to the row decoder 31 and the memory row decoder 54. Due to this, it is possible to make the timing of storage different from the timing of display operations. The drive frequency is higher than that of storage and display operations in simultaneous timing. However, various forms of driving is feasible, e.g., address data is transmitted to the memory row decoder 54 in certain timing to make storage operation, and then address data is transmitted to the row decoder 31 in the next timing to make display.

10 [0079] As above, according to the second embodiment, because address signals are independently inputted respectively to the row decoder 31 and the memory row decoder 54, it is possible to enhance the freedom for selecting a drive method.

15 [0080] Fig. 4 is a figure showing in detail an exemplary panel 1B according to a third embodiment of the invention. The panel 1B of Fig. 4 differs from the panel 1 of Fig. 2 in that a scanning line-select-control signal line and a word line-select-control signal line are respectively laid from the address buffer 71 to the row decoder 31A and the memory row decoder 54A, to transmit a scanning line-select-control signal and a word-line-select-control signal. The same address signal is inputted to the row decoder 31A and the memory row decoder 54A. However, the row decoder 31A is allowed to select a scanning line only during the period that a scanning line-select-control signal is on. Also, the memory row decoder 54A similarly is allowed to select a word line only during the period that a word-line-select-control signal is on. Consequently, storage and display operations can be made in different timing depending upon control of on-off of these signals.

20 [0081] As above, according to the third embodiment, the scanning line-select period of the row decoder 31A is limited on the basis of the scanning line-select-control signal and the word-line-select period of the memory row decoder 54A is limited on the basis of the word-line-select-control signal. Therefore, it is possible to enhance the freedom for selecting a drive method for storage and display

25

30

operations. Accordingly, various ones of drive control are feasible depending on the method.

[0082] Fig. 5 is a figure representing in detail a panel 1C according to a fourth embodiment of the invention. The panel 1C of Fig. 5 differs from the panel 1B of Fig. 4 in that a column selection switch section 53A, a sense amplifier section 57A and memory cell section 56A are laid out taking into account a case such as  $k = 6$ . Also, the column decoder 51A and the input control circuit 52A, respectively, deal with signals in two times due to  $k = 6$ , as compared to the column decoder 51 and the input control circuit 52 (besides this, different from the panel 1 of Fig. 2 in that there are a scanning line-select-control signal line and a word-line-select-control signal line). As described before, if the memory cells are arranged such that the length in the row direction of the memory cell section 56 is equal to or smaller than the length in the row direction of the active-matrix LCD section 2, then the memory cells in one column can be arranged most efficiently with a saved space width. Accordingly, it is ideal to arrange the memory cells in amount of  $k$  bits in the row direction to have a length equal to or smaller than the pitch of dots.

[0083] However, if increasing the tonal level, the value of  $k$  increases (64 tonal levels at  $k = 6$ , display possible in about 260 thousand colors). That is, there is an increase in the number of memory cells to store 1-dot data. Due to this, it is to be considered that the arrangement of memory cells in amount of  $k$  bits as they are will exceeds the pitch of dots. Accordingly, the present embodiment has a memory array in a multi-stage configuration in the memory cell section 56A, wherein the memory cells are laid out and integrally formed to have such an arrangement that the length in the row direction of the memory cell section 56A is equal to or smaller than the length in the row direction of the active-matrix LCD section 2.

[0084] Meanwhile, it is to be understood as another way of thinking that the number of memory-array rows is provided integer times the number of scanning lines to constitute a 1-dot memory cells in a plurality of rows. In this case, the  $k$ -bit DAC section 41 time-division-processes digital data to drive the data line.

[0085] As above, according to the fourth embodiment, where the length of arrangement of  $k$ -bit memory cells in the row direction cannot be given equal to or smaller than the pitch of dots, the memory array is made in a multi-stage configuration to have layout and integral formation such that the length in the row direction of the

memory cell section 56A equal to or is smaller than the length in the row direction of the active-matrix LCD section 2. Accordingly, it is possible to facilitate interconnections between the memory cell section 56A and the k-bit DAC section 41. Thus, space saving can be achieved.

5           **[0086]** Fig. 6 is a figure representing in detail a panel 1D according to a fifth embodiment of the invention. The panel 1D of Fig. 6 differs from the panel 1B of Fig. 4 in arrangement of memory cells in the memory cell section 56B, and in that the image signals for two pixels are simultaneously inputted so that the column decoder 51B can select two pixels simultaneously. Furthermore, the input control circuit 52A and the column selection switch section 53A respectively deal with signals in two  
10           times as compared to the input control circuit 52 and the column selection switch section 53A.

**[0087]** The fourth embodiment explained on the case that the length of arrangement of memory cells in amount of k bits is longer than the pitch of pixels. Conversely, the length of arrangement of memory cells in amount of plurality of  
15           pixels (dots) is equal to or smaller than the pitch of one pixel (dot), it is possible to further save the space by laying out and integrally forming the memory cells in amount of a plurality of pixels (dots) arranged corresponding to the one-pixel (dot) pitch. However, in this case, the same number of word lines as the scanning lines are  
20           provided to provide memory cells corresponding to the dots without sharing the word lines. It is noted that in this case the sense amplifier section 57 can be shared.

**[0088]** Also, in the first to fourth embodiments the row decoder 51 was configured to select one pixel, as in Fig. 2 to Fig. 5. However, it is to be understood that the present invention is not limited to this, but may be made to select integer-  
25           times simultaneously. In this case, the image signal is inputted in proportion to the multiple.

**[0089]** As above, according to the fifth embodiment, where the length of arrangement with memory cells in amount of plurality of pixels (dots) is equal to or smaller than the length of one-pixel (dot) pitch, the memory cells in amount of  
30           plurality of pixels (dots) are laid out and integrally formed by arrangement corresponding to the one-pixel pitch. Accordingly, space saving can be further achieved. Moreover, the sense amplifier section 57 can be shared. Also, because the column decoder 511 can select two pixels simultaneously, the drive frequency can be



lowered and power-consumption reduction be achieved despite interconnection is complicate. Also, sufficient operation is obtained even if driven by the active elements inferior in characteristic to the single-crystal FETs.

[0090] Fig. 7 is a figure representing in detail a panel 1E according to a sixth embodiment of the invention. The panel 1E of Fig. 7 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix OEL section 8 as a display drive section and in that the k-bit DAC section 41 is not used.

[0091] OEL (organic Electro Luminescent) means an organic EL element. This OEL element is a spontaneous luminescent device different from liquid crystal. Consequently, the device has the following features:

- (1) wide view angle;
- (2) reduction of weight and thickness feasible;
- (3) high contrast ratio;
- (4) low power consumption (back light not required);
- (5) multi-color feasible due to molecular design; and
- (6) high-definition display feasible owing to current drive.

[0092] Fig. 8 is a figure showing an exemplary circuit arrangement of an active-matrix OEL section 8. Fig. 8 shows an arrangement with two pixels. As described before, LCD requires alternating-current drive for the purpose of extending the life of liquid crystal. Consequently, analog conversion is generally implemented without using digital data as it is. Where making OEL luminous, usually digital data is analog-converted, e.g. two transistor scheme is used to hold the converted analog signal (data) on a capacitance or the like. The output current of the transistor is controlled with the converted analog data to control the luminescence of OEL. It is noted that OEL is driven on direct current (DC drive). On the other hand, as shown in Fig. 8, it is possible to deal with digital data such as an image signal, as it is, stored on each memory.

[0093] Next, explanation will be made on a method for displaying display data stored on the frame memory by exemplifying the dot of R1 (R of a pixel on the first column). R1 is provided with seven OEL elements to display eight tone levels. The seven OEL elements are grouped with one OEL element, two OEL elements and four OEL elements respectively, connected to R1S, R1T and R1U corresponding to

each bit line. The difference in tonal level is expressed by luminescent area. Accordingly, at tonal level 0, R1S, R1T and R1U are not driven not to emit any of the elements. At tonal level 1, R1S is driven to make one OEL element luminous. Similarly, at tonal level 2, R1T is driven to make two OEL elements luminous, and at  
 5 tonal level 3, R1S and R1T are driven to make three OEL elements luminous. Tonal level is represented by the combination of them. This is also true for the dots of G and B.

[0094] Herein, OEL may be DC driven, and refresh due to inversion drive is usually unnecessary where change in displaying is not required. It is noted that a  
 10 dynamic circuit is used in Fig. 8. Accordingly, even if there is no change in displaying, there is need to maintain displaying by refreshing at a constant time interval on the basis of the data stored in each memory cell in the frame memory section 5.

[0095] Although Fig. 7 described as corresponding to Fig. 2 as the first  
 15 embodiment, it is to be understood that the active-matrix OEL section 8 is applicable to the display devices employing the respective panels of the second to fifth embodiments without departing from the spirit and scope of the present invention.

[0096] Also, although the sixth embodiment shows the example to  
 20 implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the OEL elements in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

[0097] As above, according to the sixth embodiment, because OEL element  
 25 as spontaneous luminescent device is used for display, it is possible not only to obtain the effects of the first to fifth embodiments but also to reduce power consumption and weight due to unnecessary of back light. Moreover, because tonal representation is feasible by using the digital data to be stored in the frame memory section 5, as it is,  
 30 without analog conversion, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

Embodiment 7

**[0098]** Fig. 9 shows in detail a panel 1F according to a seventh embodiment of the invention. The panel 1F of Fig. 9 differs from the panel 1E of Fig. 7 in that the section for actual display is made as an active-matrix LCD section 2A as a display drive section.

5       **[0099]** Incidentally, the panel 1F of Fig. 9 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix LCD section 2A and in that the k-bit DAC section 41 is not employed.

10       **[0100]** Fig. 10 is a figure showing an exemplary circuit arrangement of the active-matrix LCD section 2A. Fig. 10 shows an arrangement with two pixels. As described before, because LCD requires alternate-current drive for the purpose of extending the life of liquid crystal, analog conversion is generally made without using digital data as it is. The configuration of Fig. 10 is made to deal with digital data such as the image signal stored on each memory cell, as it is, as hereinafter described.

15       **[0101]** Next, an exemplary method for displaying the display data stored in the frame memory will be explained by exemplifying the dot of R1 (R on the first column pixel). R1 has three liquid crystal regions respectively covered with independent pixel electrodes in order to represent eight tonal levels. The three liquid crystal regions are in area ratio of 1:2:4 and connected to R1S, R1T and R1U corresponding to each bit line. Meanwhile, the region of the active-matrix LCD section 2A, other than the liquid crystal regions, i.e. the entire region excepting the pixel electrodes, are shaded. Accordingly, the difference of tonal level is represented as an area of the liquid crystal region in a transmissive state. Hence, at tonal level 0, R1S, R1T and R1U are not driven to make every liquid crystal region in a shade state. At tonal level 1, R1S is driven to make the liquid crystal region of the area ratio 1 in a transmissive state. Similarly, at tonal level 2, R1T is driven to make the liquid crystal region of the area ratio 2 in a transmissive state, and at tonal level 3, R1S and R1T are driven to make the liquid crystal regions of the area ratio 1 and area ratio 2 in a transmissive state. Tonal level is represented by this combination. This is also true for the dots of G and B.

30       **[0102]** In this embodiment, a rectangular wave is supplied to the common feed line VLC to apply voltage to each liquid crystal region. The voltage of the rectangular wave to be supplied to the common feed line VLC is a voltage that positive and negative potentials can completely raise the liquid crystal. Also, the

frequency of the rectangular wave is the same as the frequency of an alternating-current drive in the usual liquid crystal display device. This realizes a digital-compatible active-matrix LCD section 2A.

[0103] Incidentally, because Fig. 10 of the present embodiment uses a dynamic circuit similarly to Fig. 8 of the sixth embodiment, there is a need to sustain displaying by refreshing at a constant time interval on the basis of the data stored on each memory cell of the frame memory section 5.

[0104] Although Fig. 9 describes corresponding to Fig. 2 as the first embodiment, it is to be understood that the digital-compatible active-matrix LCD section 2A is applicable to the display devices employing the respective panels of the second to fifth embodiments without departing from the spirit and scope.

[0105] Although the seventh embodiment explained the arrangements or the like on the assumption of the transmissive type LCD, the similar idea is applicable even in a reflective type LCD. In a reflective type LCD, because the devices can be arranged at an underside of the pixel electrodes, more complicated circuit will be feasible and advantageous for achieving multi-bit.

[0106] Also, although the seventh embodiment shows the example to implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the liquid crystal in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

[0107] As above, according to the seventh embodiment, because the digital data to be stored in the frame memory section 5 can be used as it is without analog conversion to provide tonal representation, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

[0108] Incidentally, although the above embodiments explained on the assumption of the color display, it is to be understood the present invention can also cope with a monochromatic display.

[0109] As above, according to the embodiments of the invention where integral formation is made using TFTs including a peripheral circuit, for example on

polysilicon, memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section were allocated corresponding to a length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver and memory cell section allocated to have a row length smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

**[0110]** Also, according to the embodiments of the invention where a display drive circuit for display control using, for example, an organic EL element is integrally formed including a peripheral circuit on polysilicon, memory cells in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

**[0111]** Also, according to the embodiments of the inventions where a display drive circuit for display control using a liquid crystal is integrally formed including a peripheral circuit, for example, on polysilicon, the memory cells in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding the length in the row direction of the display drive section, beside the column decoder section and column section switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, because the organic EL elements are DC-driven, an image signal of a digital signal can be directly used, eliminating the necessity of providing such a circuit as DAC, for example.

[0112] Also, according to the embodiments of the inventions where a display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit for example on polysilicon, the memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section and column selection switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, the organic EL element is DC-driven, an image signal of a digital signal can be directly used, thus eliminating the necessity of using such a circuit as DAC, for example.

[0113] Also, according to the embodiments of the invention even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, the space-saved width can be achieved with efficiency.

[0114] Also, according to the embodiments of the invention a word line driver section for selecting and driving the word lines provided in the number equal to the scanning lines is further integrated on and formed integrally with the substrate, and the memory cell section is structured by a memory array corresponding to the dot arrangement of the display drive section, to store an image signal required for display over one screen. Accordingly, external exchange of data amount is decreased, achieving reduction in power consumption.

[0115] Also, according to the embodiments of the invention the scanning line driver section and word line driver section is made to select a scanning line and word line to be driven on the basis of an address signal. Accordingly, no sequential scanning is required, and random selection and drive of the scanning line can be made in accordance with the address signal. This is convenient in rewriting display data as required.

[0116] Also, according to the embodiments of the invention because the same lines are shared in the scanning line driver section and the word line driver section, it is possible to achieve space saving due to simplification of interconnections and reduction in circuit area.

5 [0117] Also, according to the embodiments of the invention because independent address signals are inputted to the scanning line driver section and the word line driver section, it is possible to enhance the freedom in storage and display operations.

10 [0118] Also, according to the embodiments of the invention scanning line driver section operates to select and drive the scanning line on the basis of the address signal only when a scanning line driver control signal is inputted and the word line driver section operates to select and drive the word line on the basis of the address signal only when a word line driver control signal is inputted. Accordingly, it is possible to enhance the freedom in selecting a driving way of storage and display operations. Due to this, a variety of drive control is feasible depending on the method.

15 [0119] Also, according to the embodiments of the invention the column decoder section is made to randomly select a memory cell to store an image signal due to the address signal. Accordingly, there is no need to write sequentially onto the dots on the same scanning line, and random writing can be made. This is convenient in rewriting display data as required.

20 [0120] Also, according to the embodiments of the invention image signals are inputted on one-pixel-unit basis, based on an input of which the column decoder section selects a memory cell in amount of one pixel as a display-change unit thus being convenient.

25 [0121] Also, according to the embodiments of the invention image signals are inputted on a plurality-of-pixel-unit basis, wherein the column decoder section selects a memory cell in amount of a plurality of pixels based on an input thereof. Accordingly, interconnections may be complicated but drive frequency can be decreased thus achieving reduction in power consumption. Also, sufficient operation is available if driving with the active element inferior in characteristic to single crystal FET.

30

[0122] Also, according to the embodiments of the invention the image-signal-input interconnection and column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section.

Accordingly, it is possible to achieve the reduction in power consumption by  
5 decreasing the crossover of interconnections and prevent superposition of noise on the display screen due to the effects of switching or the like.

[0123] Also, according to the embodiments of the invention a multi-stage structure is given in the structure and the formation. Accordingly, even where the memory cell cannot be allocated corresponding to the length in the row direction of  
10 the display drive section because, for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, the interconnections can be facilitated and space saving be achieved.

[0124] Also, according to the embodiments of the invention the structure is made by a plurality of rows. Accordingly, where the memory cell cannot be allocated  
15 corresponding to the length in the row direction of the display drive section because, for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, it is possible to suppress the length in the row direction despite the length in the column direction broadens.

[0125] Also, according to the embodiment of the inventions where a  
20 plurality of rows of memory cells can be allocated corresponding to the length in the row direction of the display drive section, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array allocated corresponding to the length in the row direction of the display drive section (e.g. the memory cells allocated to have  
25 a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, space saving is further achieved.

[0126] Also, according to the embodiment of the invention a timing controller section for controlling timing of transmitting the address signal and a memory controller section for controlling to transmit the image signal are further  
30 integrated on the substrate and integrally formed therewith, to systematically, integrally forming all the peripheral circuit required for display control on the same substrate. Accordingly, the system entirety can be made at low cost, reliable and space-saved.



[0127] Also, according to the embodiment of the invention a D/A converter is provided between the display drive section and the memory cell section to supply the image signal converted into an analog signal to the display drive section. Accordingly, display can be made by the display drive section compatible with analog signals.

5

[0128] Also, according to the embodiment of the inventions the display drive section and the memory cell section are directly coupled together to directly supply an image signal comprising a digital signal to the display drive section. Accordingly, display can be made by the display drive section compatible with digital signals, and consumption power be reduced.

10

103129 336366

## CLAIMS

## 1. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, the display drive performs display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated corresponding to a length in a column direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated corresponding to the length in a row direction of said display drive;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated corresponding to the length in the row direction of said display drive, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

2. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, the display drive performs display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated to have a length in a column direction equal to or smaller than a length in a row direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

3. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, the display device emits  
5 an organic EL elements connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated corresponding to a length in a column direction of said display drive;

10 a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated corresponding to the length in the row direction of said display drive;

a column decoder allocated corresponding to the length in the row  
15 direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said  
20 memory cells selected by said column decoder; and

a data line driver allocated corresponding to the length in the row direction of said display drive section, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed  
25 therewith.

4. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to said active elements by driving said scanning lines and said data lines to perform display control;

a scanning line driver that selects and drives said scanning lines, the scanning line driver being allocated to have a length in a column direction equal to or smaller than a length in the column direction of said display drive;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder; and

a data line driver allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the data line driver drives said data lines on the basis of the image signal stored in said memory, the data line driver further being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal display that is controlled by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of the display drive, the memory being allocated corresponding to the length in the row direction of said display drive;

a column decoder allocated corresponding to the length in the row direction of said display drive, the column decoder selects the memory cells for storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cell selected by said column decoder, the column decoder being integrated on a semiconductor or insulating substrate and integrally formed therewith.

6. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal display that is controlled by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction

thereof equal to or smaller than the length in the row direction of said display drive,  
and each of the memory cells being connected to each of the bit lines;

a column decoder allocated to have a length in a row direction equal  
to or smaller than the length in the row direction of said display drive, the column  
5 decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row  
direction equal to or smaller than the length in the row direction of said display drive,  
to switch on the basis of a selection by said column decoder and the image signal and  
storing the image signal to said memory cells selected by said column decoder, the  
10 column selection switch section being integrated on a semiconductor or an insulating  
substrate and integrally formed therewith.

7. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of  
bit lines, and organic EL elements to be controlled in luminescent display by driving  
15 the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as  
minimum units of control in display, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of  
storing an image signal for performing display control of dots in at least one row of  
said display drive, the memory being allocated corresponding to the length in the row  
20 direction of said display drive, and each of the memory cells being connected to each  
of the bit lines;

a column decoder allocated corresponding to the length in the row  
direction of said display drive, the column decoder selects said memory cells storing  
an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cell selected by said column decoder, the column selection switch section  
5 being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

8. A display device, comprising:

a display drive having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving  
10 the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory having a plurality of memory cells that are capable of storing an image signal for performing display control of dots in at least one row of said display drive, the memory being allocated to have a length in a row direction  
15 thereof equal to or smaller than the length in the row direction of said display drive and each of the memory cells being connected each of the bit lines;

a column decoder allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, the column decoder selects said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive, to switch on the basis of a selection by said column decoder and the image signal and storing the image signal to said memory cells selected by said column decoder, the column selection switch section integrated on a semiconductor or an insulating  
20 substrate and integrally formed therewith.  
25



9. A display device as claimed in claim 1, wherein the number of said memory cells, which are allocated corresponding to the length in the row direction of said display drive and capable of storing the image signal for display control of the dots on one row of said display drive, is structured redundantly.

5 10. A display device as claimed in claim 1, wherein said memory connects said memory cells in the number capable of storing an image signal for display control of the one-row dots to each of word lines in the number equal to the number of said scanning lines and is structured with a memory array corresponding to dot arrangement of said display drive, and

10 a word line driver that selects and drives said word lines are further integrated on and integrally formed with said substrate.

11. A display device as claimed in claim 10, wherein, on the basis of an address signal representative of a display position and a storage position, said scanning line driver selects said scanning lines and said word line driver selects said word lines.

12. A display device as claimed in claim 11, wherein the same address signal is inputted to said scanning line driver and said word line driver.

13. A display device as claimed in claim 11, wherein independent address signals are inputted to said scanning line driver and said word line driver.

20 14. A display device as claimed in claim 11, wherein said scanning line driver operates to select and drive said scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and said word line driver operates to select and drive said word lines on the basis of the address signal only when a word line driver control signal is inputted.

15. A display device as claimed in claim 11, said column decoder section selecting the memory cell to store an inputted image signal on the basis of the address signal.

5 16. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of one-pixel , and said column decoder selects the memory cell in an amount of one pixel.

10 17. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of a plurality of pixels , and said column decoder selects the memory cell in an amount of a plurality of pixels.

15 18. A display device as claimed in claim 1, wherein an input interconnection for the image signal to be stored in said memory cell and said column selection switch section are formed on a side opposite to said display drive sandwiching said memory therebetween.

19. A display device as claimed in claim 1, wherein said memory is allocated with the memory cell corresponding to the length in the row direction of said display drive and formed in a multi-stage structure.

20 20. A display device as claimed in claim 10, said word lines being provided in the number of integer times the number of the scanning lines, and said memory being structured by a memory array connecting , by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of said display drive to the word lines in the number of the integer times.

21. A display device as claimed in claim 1, wherein said memory is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive and allocated corresponding to the length in the row direction of said display drive.

22. A display device as claimed in claim 1, wherein said memory is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive and allocated to have a length in the row direction equal to or smaller than the length in the row direction of said display drive.

23. A display device as claimed in claim 22, further comprising:  
a timing controller that controls a timing of transmitting the address signal, and  
a memory controller that controls the transmitting of the image signal, the memory controller being integrated on a semiconductor or an insulating substrate and integrally formed therewith.

24. A display device as claimed in claim 1, wherein a D/A converter is provided between said display drive and said memory cell that converts the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to said display drive.

25. A display device as claimed in claim 1, wherein said display drive and said memory are directly coupled to supply the image signal comprising a digital signal stored in said memory to said display drive.

26. A display device as claimed in claim 25, wherein said display drive performs digital drive through area tonal level, time-division tonal level or a combination thereof.

## ABSTRACT OF THE DISCLOSURE

The invention provides a display device having, integrated on a substrate and integrally formed therewith, an active-matrix LCD section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots, and active elements according to the respective intersections to perform display control using a liquid crystal by driving the scanning lines and the data lines. The display device further including a row decoder for selecting the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for display control of dots in at least one row of a display drive section and allocated corresponding to the length in the row direction of the display drive section. The display device further having a column decoder section for selecting a memory cell to be stored with an inputted image signal, a column selection switch section switching on the basis of a selection by the column decoder section 51 and the image signal and storing the image signal to the memory cell selected, and a k-bit DAC section 41 for driving a data line on the basis of the image signal stored in the memory cell section.

~~TECHNICAL FIELD~~

## BACKGROUND OF THE INVENTION

**[0003]** Fig. 11 is a block diagram of a system to implement display through an

15 a display device with a TFT display. This system is constituted with an image signal source 100 and a TFT liquid crystal display panel 101. The image signal source 100 is formed, at least, by a CPU 100A, a RAM 100B, a frame memory 100C and an LCD controller 100D. The CPU 100A is <sup>an</sup> operation control <sup>ler</sup> ~~means~~ <sup>that</sup> to transmit <sup>s</sup> display data while exchanging data with the RAM 100B as a general-purpose memory. ~~This~~ <sup>The</sup> memory RAM 100B is ~~not especially~~ <sup>not</sup> provided <sup>only</sup> as a display memory, and hence <sup>can</sup> requires ~~newly a~~ <sup>frame</sup> memory <sup>100C</sup> to store data for display. ~~It is the frame memory 100C.~~ The frame memory 100C temporarily stores display data for one screen of a liquid crystal panel 101C (hereinafter, the data for one pixel is given as display data, and each binary signal forming the display data is referred to as an image signal). The LCD controller 100D ~~is to~~ <sup>can</sup> implement transmission control or the like of display data ~~in~~ order to display in timing the display data stored in the frame memory 100C in display positions on the liquid crystal panel 101C. Herein, although ~~for the CRT there is a~~ <sup>requires</sup> ~~need to transmit~~ the display data ~~through conversion~~ <sup>to be converted</sup> into analog data, the display data herein is transmitted by an image signal as digital data on the assumption that the interface of the liquid crystal display corresponds to digital data. If the image signal is digital data, D/A conversion is not required on the side of the TFT liquid crystal display panel 101.

[0004] ~~Meanwhile~~ <sup>includes</sup> the TFT liquid crystal display panel 101 <sup>is structured</sup> with a scanning line driver 101A, a digital data driver 101B and a liquid crystal panel 101C. The scanning line driver 101A controls display in a scanning line (row) direction on the basis of timing data transmitted from the LCD controller 100D. The digital data driver 101B can receive and process digital-data image signal. The digital data driver 101B controls display in a data-line (column) direction on the basis of timing data transmitted from the LCD controller 100D. Thereupon, display tonal level <sup>can be</sup> ~~is~~ also controlled. The liquid crystal panel 101C is a panel having TFTs (Thin Film Transistors) <sup>to make display under the control of the scanning line driver 101A and digital data driver 101B.</sup>

[0005] In such a system, the LCD controller 100D must transmit to the digital data driver 101B the display-data image signal for the entire screen temporarily stored in the frame memory 100C. Moreover, transmission timing by progressive scanning is fixed. Consequently, there is a need to transmit image signals in timing also for the display data on the pixels not requiring display change. <sup>Accordingly,</sup> ~~Due to this,~~ there is an increase in useless data transmission amount, <sup>herefore an</sup> ~~and hence~~ increase in power consumption. Thus, reduction of power consumption cannot be achieved.

[0006] Therefore, it is an object of the present invention to obtain a display device of a space-saved design having a structure for achieving consumption-power reduction <sup>and</sup> moreover taking into consideration layout efficiency particularly for the case of integrally forming the peripheral circuit over a glass substrate.

#### ~~DISCLOSURE OF THE INVENTION~~

[0007] <sup>An exemplary</sup> ~~A~~ display device of the <sup>present</sup> invention <sup>includes</sup> ~~of claim 1 comprises~~ a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines <sup>a</sup> ~~a~~ scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning lines <sup>a</sup> ~~a~~ memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section <sup>a</sup> ~~a~~ column decoder section allocated corresponding to the length in the row direction of the

display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section and a data line driver section allocated corresponding to the length in the row direction of the display drive section to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0008] In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate, for example, of a glass substrate, or a quartz substrate, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section, column select switch section and data line driver section.

[0009] It is noted that the points allocated corresponding to a length in a column direction and allocated corresponding to a row direction mean that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means <sup>that</sup> the length in the row direction is equal to or smaller than the length in the row direction of the display drive section ~~as limited in the invention of claim 2~~. <sup>Further,</sup> The meaning of "equal to or smaller than" is either that the both are equal or that the former is small as compared to the latter. In the invention, however, for example the length in the row direction of the memory cell section may be satisfactorily somewhat greater <sup>by</sup> ~~(e.g. about several %)~~ <sup>, such as several percent,</sup> than the length in the row direction of the display drive section.

[0010] In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space ~~that~~ <sup>where</sup> no circuit is provided on the substrate in an area of the display drive



section along a row-direction-side end because the length in the row direction of the memory cell section is <sup>relatively</sup> larger than the length in the row direction of the display drive section.

[0011] A display device of the <sup>present</sup> invention <sup>can include</sup> ~~of claim 2 comprises~~ a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines <sup>a</sup> scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a column direction of the display drive section, to select and drive the scanning lines <sup>a</sup> a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section <sup>a</sup> a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal <sup>a</sup> a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section <sup>a</sup> and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0012] In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate for example, of a glass substrate, or a quartz substrate <sup>//</sup>, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

present  
5

can include

[0013] A display device of the invention of ~~claim 3~~ comprises a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element

5 connected to the active elements by driving the scanning lines and the data lines to perform display control ~~/~~ a scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning line ~~/~~ a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least

10 one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section ~~/~~ a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select the memory cells for storing an input image signal ~~/~~ a column selection switch section allocated corresponding to the length in the row direction of the display drive section

15 to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section ~~/~~ and a data line driver section allocated corresponding to the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an

20 insulating substrate and integrally form therewith.

[0014] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on

25 one row of the display drive section corresponding to a length in a row direction of the display drive section.

[0015] It is noted that the points ~~/~~ allocated corresponding to a length in a column direction ~~/~~ and ~~/~~ allocated corresponding to a row direction ~~/~~ <sup>can</sup> mean that, for example, in the memory cell section, the length in the row direction thereof

30 corresponds to a length in the row direction of the display drive section. More specifically, this <sup>can</sup> means <sup>that</sup> the length in the row direction is equal to or smaller than the length in the row direction of the display drive section ~~/~~ <sup>as limited in the invention of</sup> ~~claim 4~~. The meaning of ~~/~~ equal to or smaller than ~~/~~ is either that the both are equal or

that the former is small as compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater <sup>by</sup> ~~(e.g. about several %)~~ <sup>, such as several percent,</sup> than the length in the row direction of the display drive section.

**[0016]** In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0017] A display device of the invention of claim 4 comprises a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to the active elements by driving the scanning lines and the data lines to perform display control, a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a row direction of the display drive section, to select and drive the scanning lines, a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the

data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0018] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section, in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

[0019] A display device of the invention <sup>present</sup> ~~of claim 5 comprises~~ <sup>can include</sup> a display drive section having a plurality of scanning lines and a plurality of bit line, and a liquid crystal controlled in display ~~by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form~~ a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section, a column decoder section allocated corresponding to the length in the row direction of the display drive section, to select the memory cells for storing an input image signal, and a column selection switch section allocated corresponding to the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0020] In this invention, where the display drive circuit for display control using a liquid crystal including a peripheral circuit <sup>can be</sup> ~~is~~ integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0021] It is noted that the point<sup>that</sup> allocated corresponding to a row direction<sup>as limited in the invention of</sup> means that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means<sup>that</sup> the length in the row direction is equal to or smaller than the length in the row direction of the display drive section<sup>as limited in the invention of</sup> claim 6. The meaning of<sup>that</sup> equal to or smaller than<sup>is</sup> is either that the both are equal or the that former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater<sup>, such as by several percent,</sup> ~~(e.g. about several %)~~ than the length in the row direction of the display drive section.

[0022] In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0023] A display device of the<sup>present</sup> invention of<sup>can include</sup> claim 6 comprises a display drive section having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal controlled in display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form<sup>,</sup> a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines<sup>,</sup> a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for string an input image signal<sup>,</sup> and a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the

column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5 [0024] In this invention, where ~~the~~ the display drive circuit for display control using a liquid crystal including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

10 [0025] A display device of the <sup>present</sup> invention ~~of claim 7~~ <sup>can include</sup> comprises a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the

15 corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form <sup>'</sup> a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of said display

20 drive section, and each memory cell being connected to each of the bit lines <sup>'</sup> a column decoder section allocated corresponding to the length in the row direction of the display drive section to select the memory cells for storing an input image signal <sup>'</sup> and a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the

25 column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

30 [0026] In this invention, where ~~the~~ the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the

display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0027] It is noted that the point ~~allocated~~ corresponding to a row direction ~~X~~ means that, for example in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means <sup>that</sup> ~~X~~ the length in the row direction is equal to or smaller than the length in the row direction of the display drive section ~~X~~ ~~as limited in the invention of claim 8~~. The meaning of ~~X~~ equal to or smaller than ~~X~~ is either that the both are equal or that the former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may satisfactorily be somewhat greater <sup>such as by several percent,</sup> ~~(e.g. about several %)~~ than the length in the row direction of the display drive section.

[0028] In brief, for the memory cell section for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0029] A display device of the invention <sup>present</sup> ~~of claim 8~~ <sup>can include</sup> comprises a display drive section having a plurality of scanning lines and a plurality of bit lines <sup>s</sup> and organic EL elements to be controlled in luminescent display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form ~~X~~ a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines ~~X~~ a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal ~~X~~ and a column

selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, integrated on a semiconductor or insulating substrate and integrally formed therewith.

[0030] In this invention, where the display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit, by using polysilicon TFTs, memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, and column selection switch section.

[0031] A display device of the <sup>present</sup> invention of ~~claim 9~~ structures redundant in the number of the memory cells allocated corresponding to the length in the row direction of the display drive section and in the number capable of storing the image signal for display control of the dots on one row of the display drive section.

[0032] In this invention, even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display drive section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section).

<sup>can</sup> [0033] <sup>In</sup> A display device of the <sup>present</sup> invention of ~~claim 10~~ ~~is that~~ the memory cell section <sup>can</sup> connects the memory cells in the number capable of storing an image signal for display control of the one-row dots to each of the word lines in the number equal to the number of the scanning lines and is structured with a memory array corresponding to dot arrangement of the display drive section, and a word line driver section for selecting and driving the word lines are further integrated on and integrally formed with the substrate.

[0034] In this invention, the memory cell section <sup>can be</sup> structured by a memory array corresponding to the dot arrangement of the display drive section to store an image signal required for displaying one screen thereby providing a structure capable



of reducing data amount externally exchanged and achieving reduction in power consumption. Also, in order to store due to the array structure, ~~on~~ the substrate is integrated and integrally formed therewith a word line driver section to select and drive the word lines provided equal in the number to the scanning lines. *can include that*

5        [0035] A display device of the invention ~~of claim 11 is that~~ on the basis of an address signal representative of a display position and a storage position, the scanning line driver section selects the scanning lines and the word line driver section selects the word lines.

10       [0036] In this invention, a scanning line and a word line can be selected randomly by an address signal to secure the freedom in storage or display with respect to the column direction.

      [0037] A display device of the invention ~~of claim 12 is that~~ *can include* that the same address signal is inputted to the scanning line driver section and the word line driver section. *←*

15       [0038] In this invention, in order to simplify the interconnections, the same lines can be shared by the scanning line driver section and the word line driver section. Consequently, the same address signal can be inputted in the same timing.

      [0039] *In* A display device of the invention ~~of claim 13 is that~~ independent address signals *are* inputted to the scanning line driver section and the word line driver section. *can* *←*

20       [0040] In this invention, in order to enhance the freedom in storage and display operations, independent address signals are inputted to the scanning line driver section and the word line driver section, e.g. operation timing can be made different.

25       [0041] *In* A display device of the invention ~~of claim 14 is that~~ the scanning line driver section *can* operates ~~to~~ to select and drive the scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and the word line driver section *can* operates ~~to~~ to select and drive the word lines on the basis of the address signal only when a word line driver control signal is inputted. *←*

30       [0042] In this invention, in order to simplify the interconnections while enhancing the freedom of storage and display operations, the scanning line driver section can perform selection and driving operations of a scanning lines on the basis of an address signal only when a scanning line driver control signal is inputted and the word line driver section perform selection and driving operations of a word line on the basis of the address signal only when a word line driver control signal is inputted.

<sup>In</sup>  
 [0043] A display device of the invention of ~~claim 15~~ is that the column decoder section selects the memory cell to store an inputted image signal on the basis of the address signal.

5 [0044] In this invention, the column decoder section can select randomly a memory cell to store an image signal due to the address signal and secure the freedom in storage and display with respect to the row direction.

<sup>In</sup>  
<sup>can include</sup>  
 [0045] A display device of the invention of ~~claim 16~~ is that one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of one-pixel, and the column decoder section selects the memory cell in an amount of one pixel.

10 [0046] In this invention, where the display device performs color displays, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of one-pixel as a display change unit. The column decoder section selects memory cells in an amount of the one pixel on the basis of that input.

<sup>In</sup>  
<sup>can include</sup>  
 [0047] A display device of ~~the invention of claim 17~~ is that one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of a plurality of pixels, and the column decoder section selects the memory cells in an amount of the plurality of pixels.

20 [0048] In this invention, where the display device performs color displays, in order to decrease the drive frequency, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of a plurality of pixels. The column decoder section selects memory cells in an amount of the plurality of pixels on the basis of that input.

<sup>In</sup>  
<sup>present</sup>  
<sup>can be</sup>  
 [0049] A display device of the invention of ~~claim 18~~ is that an input interconnection for the image signal to be stored in the memory cell and the column selection switch section ~~are~~ formed on a side opposite to the display drive section sandwiching the memory cell section.

30 [0050] In this invention, crossover of interconnections is decreased to improve reduction in consumption power. Also, in order to prevent noise superposition due to the effect of switching or the like, the image-signal input interconnections and the

column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section.

[0051] <sup>In</sup> A display device of the invention, ~~of claim 19 is that~~ the memory cell section is allocated with the memory cell corresponding to the length in the row direction of the display drive section and formed in a multi-stage structure.

[0052] In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section by the increase of the memory cell in amount of one dot for example due to increase in the number of tonal levels, the structure and the formation is made by providing multi-stages.

[0053] <sup>In</sup> A display device of the invention, ~~of claim 20 is that~~ the word lines are provided in the number of integer times the number of the scanning lines, and the memory cell section structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of the display drive section to the word lines in the number of the integer times.

[0054] In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section, for example, by memory-cell increase for one dot due to the increase of tonal levels, the structure and the formation is made by providing a plurality of rows.

[0055] <sup>In a</sup> A display device of the invention, ~~of claim 21 is that~~ the memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated corresponding to the length in the row direction of the display drive section.

[0056] In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned corresponding to the length in the row direction of the display drive section.

[0057] <sup>In</sup> A display device of the invention, ~~of claim 22 is that~~ the memory cell section is structured by a memory array having the memory cells that are in the

number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section.

5 [0058] In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section.

10 [0059] <sup>In</sup> A display device of the invention, ~~of claim 23 further comprises~~ a timing controller section for controlling timing of transmitting the address signal, and a memory controller section for controlling to transmit the image signal, integrated on a semiconductor or an insulating substrate and integrally formed therewith. *can further include*

15 [0060] In this invention, the peripheral circuits required for controlling display are all integrally formed systematically on the same substrate.

[0061] <sup>In</sup> A display device of the invention, ~~of claim 24 is that~~ a D/A converter ~~is~~ *can be* provided between the display drive section and the memory cell section, thereby converting the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to the display drive section.

20 [0062] In this invention, in order to display in an analog-compatible display drive section, a D/A converter is provided between the display drive section and the memory cell section. In the D/A converter, the image signal after converting into an analog signal is supplied to the display drive section.

25 [0063] <sup>In</sup> A display device of the invention, ~~of claim 25 is that~~ the display drive section and the memory cell section ~~are~~ *can be* directly coupled to supply the image signal comprising a digital signal stored in the memory cell section to the display drive section.

30 [0064] In this invention, display is made in the display drive section compatible with digital signals. No D/A converter or the like is provided between the display drive section and the memory cell section. The image signal remained in the digital signal is supplied to the display drive section.

*In a*  
 [0065] A display device of the invention; ~~of claim 26 is that~~ the display drive section performs digital drive through area tonal level, time-division tonal level or a combination thereof.

[0066] In this invention, the display drive section compatible with digital signals makes display through area tonal level, time-division tonal level or a combination of the both.

# BRIEF DESCRIPTION OF THE DRAWINGS

*centered*

[0067] Fig. 1 is ~~a~~ *an exemplary* block diagram representing a concept of a system including a display device according to a first embodiment of the present invention;

Fig. 2 is a diagram representing in detail a panel 1x ;

Fig. 3 is a diagram representing in detail a panel 1A according to a second embodiment of the invention;

Fig. 4 is a diagram representing in detail a panel 1B according to a third embodiment of the invention;

Fig. 5 is a diagram representing in detail a panel 1C according to a fourth embodiment of the invention;

Fig. 6 is a diagram representing in detail a panel 1D according to a fifth embodiment of the invention;

Fig. 7 is a diagram representing in detail a panel 1E according to a sixth embodiment of the invention;

Fig. 8 is a diagram showing a circuit arrangement of an active-matrix OEL section 8x ;

Fig. 9 is a diagram representing in detail a panel 1F according to a seventh embodiment of the invention;

Fig. 10 is a diagram showing a circuit arrangement of an active-matrix LCD section 2Ax ; and

Fig. 11 is a block diagram of a system for display through a display device by a TFT display *stet*

## ~~BEST MODE FOR CARRYING OUT THE INVENTION~~

~~Embodiment 1~~

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

[0068] Fig. 1 is ~~a~~ *an exemplary* block diagram showing a concept of a system including a display device according to ~~Embodiment 1~~ of the present invention. Fig. 1 represents a concept called system-on-panel (SOP). SOP is the concept to form a peripheral

*The invention is described in detail with regard to the following figures, wherein like numerals reference like elements, and wherein:*

circuit for display or the like over a glass substrate, and moreover to integrally form TFTs or the like together with the peripheral circuit by the use of poly-silicon or the like without using chips of ICs or the like. Due to this, the panel can be directly coupled to the CPU while achieving low cost, high reliability and space saving.

5           **[0069]** In Fig. 1, an image signal source 110 is configured by a CPU 110A to transmit display data. Herein, the display data is transmitted with image signals as digital data, similarly to the conventional configuration shown in Fig. 11. If the image signal is digital data, D/A conversion is not required on the side of a panel 1, correspondingly achieving the reduction in size and power consumption. Meanwhile, the panel 1 <sup>can be</sup> is configured with an active-matrix LCD section 2, a scanning line driver 3, a digital data driver 4, a frame memory section 5, a memory controller 6 and a timing controller 7. The active-matrix LCD section 2 corresponds to a display drive section in the present invention.

15           **[0070]** Fig. 2 is a figure representative in detail of the panel 1. The active-matrix LCD section 2 is a part for actual display by use of active elements of TFTs, diodes or the like. The active-matrix LCD section 2 is arrayed with pixels in the number of  $i \times j$ . Because the present embodiment assumes a color display, three dots <sup>known</sup> (termed also as sub-pixels) of R (Red), G(green) and B(Blue) as light-source colors are constituted as one pixel. For a monochromatic display, the pixel equals to the dot.

20           The dot areas include data lines, scanning lines and active elements (e.g. switching elements by transistors, diodes or the like) arranged corresponding to the intersections of them. The active elements respectively have pixel electrodes to form a capacitance through a liquid crystal to a counter electrode. The voltage applied between the pixel electrode and the counter electrode controls the optical rotatory power due to liquid-crystal molecules, making display control on each dot. Moreover, even if the active element turns off the switch, the pixel electrode can sustain its displaying state owing to the storage charge before refreshing (display data rewriting) in the next time. The switch operation to the active elements and control of the charge supply to the pixel electrodes are implemented by driving a data line and scanning line (supplying

25           current).

30

**[0071]** It is a scanning line driver 3 that controls to drive a scanning line. The scanning line driver 3 is formed by a row decoder 31 and a scanning line drive buffer 32. The row decoder 31 selects a scanning line to be driven on the basis of address

data inputted. The scanning line drive buffer 32 actually drives the scanning line selected by a column decoder 31.

[0072] Meanwhile, it is a digital data driver 4 that controls to drive a data line. The digital data driver 4 is formed by a k-bit DAC section 41 as a D/A converter.

5 Herein, a frame memory section 5 will be explained before explaining the operation of the k-bit DAC section 41.

[0073] The frame memory section 5 is configured by a column decoder 51, an input control circuit 52, a column selection switch section 53, a memory row decoder 54, a word driver 55, a memory cell section 56 and a sense amplifier section 57. The column decoder 51 selects one pixel out of one row (line) of pixels (in the number of j) on the basis of input address data. This ultimately results in selection of a to-be-driven data line. The input control circuit 52 is a circuit to control an image signal ( $k \times 3$ ) in one-pixel amount transmitted in parallel from the memory controller 6. The column selection switch section 53 is provided in the number of pixels on one line (i.e.  $k \times 3 \times j$ ) with reference to one-pixel image signal ( $k \times 3$ ) as a unit. Each column selection switch performs switching on the basis of column decoder 51 selection and image signal, driving a bit line. Herein, the input control circuit 52 and column selection switch section 53 is arranged on a side opposite to the active-matrix LCD section 2 while sandwiching the memory cell section 56. This reduces interconnection crossing over, thus achieving simplification and consumption-power reduction. Moreover, by the operation of the input control circuit 52 and column selection switch section 53, no noise will be interposed over the analog-driven LCD 2. Thus, noise reduction in display can be achieved.

[0074] The memory row decoder 54 selects a word line on the basis of input address data, in order to store to a desired memory cell of the memory cell section 56 forming the memory array, as described later. The word driver 55 actually drives a word line selected by the memory row decoder 54. Consequently, the image signal is stored as the pixel display data to the memory cells in the number of  $k \times 3$  that are connected to the word line selected by the memory row decoder 54 and corresponding to the pixels selected by the column decoder 51.

[0075] Meanwhile, the memory cell section 56 has memory cells in the number of  $k \times 3 \times i \times j$  to constitute a memory array of i-lines  $\times k \times 3 \times j$ -columns. This number of memory cells is the number required for each dot of R, G or B of the

display having a screen of  $i \times j$  pixels to make display with brightness in a tonal level of  $2^k$ . In Fig. 2,  $k = 3$  is given to enable setting with eight tonal-levels of brightness. This number of memory cells is the number of memory cells required, at least, to store an image signal in amount of one screen. For example, in some circuits, a circuit configuration is given with redundant memory cells for the necessity of securing operation stability.

[0076] Herein, space saving <sup>can be</sup> ~~will be~~ achieved to a greater extent as the size of the glass substrate become equal to the size of the active-matrix LCD section 2 as an actual display part. <sup>In other words,</sup> ~~Further~~ if the memory cells are arranged such that the length of the memory cell section 56 in the row direction is equal to or smaller than the length of the active-matrix LCD section 2 in the row direction, the memory cells in one column can be arranged most efficiently with a saved space width. Consequently, because the length of memory-cell arrangement in the row direction required to control 1-dot display is equal to or smaller than a pitch of dots, the length of the entire frame memory section 5 in the row direction is given equal to or smaller than the length of the active-matrix LCD section 2 in the row direction. Accordingly, design is made in Fig. 2 such that the length in the row direction of  $k$ -bit memory cell arrangement equals to each pitch of dots. Each sense amplifier (or selection switch) of the sense amplifier section 57 and each  $k$ -bit DAC of the  $k$ -bit DAC section 41 are also designed based upon each pitch of dots.

[0077] Also, the number of rows of the memory array is made equal to the number of scanning lines <sup>( $i$ )</sup> so that the memory frame section 5 can store display data in amount of 1 screen. Consequently, it is possible to carry out storage with correspondence between a display-positioned pixel and a memory cell provided on a dot-by-dot basis. In order to achieve only space saving, it is satisfactory to have at least one row of memory cells without the especial necessity of constituting a memory array having the number of rows equal to the number of scanning lines. However, in order to reduce the data transmission amount over the system overall and <sup>lower</sup> ~~low~~ power consumption, memory cells are required in amount enough to store display data in amount of 1 screen with correspondence. Accordingly, an image signal in amount of display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU 110A. If no rewriting is made, the digital data driver 4 satisfactorily deals with the image-signal data stored in the memory cell section 56 as it is.



[0078] Each sense amplifier constituting the sense amplifier section 57 is connected on column (bit line)-by-column basis. Herein, the use of the sense amplifier is for the case each memory cell of the memory cell section 56 is configured by a dynamic memory. In the case of configuration with a static memory, selection switches are used in configuration instead of sense amplifiers.

[0079] The k-bit DAC section 41 constituting the digital data driver 4 is configured by k-bit DACs in the number of  $3 \times j$ . Each k-bit DAC is inputted with digital data based on the image signal stored on certain memory cells in the number of k through the bit lines in the number of k. The k-bit DAC converts the data-based value into a tonal level, depending upon which tonal level a data line is driven. In the LCD, alternating-current drive is required for the purpose of extending the life of liquid crystal. Accordingly, digital data cannot be used as it is but must be ~~analog~~ <sup>converted to</sup> ~~converted~~ <sup>analog</sup>. In this manner, display control is made, on the basis of display data, on the dot at an intersection of a driven scanning line and a data line.

[0080] Herein, the digital data driver 4 and the frame memory section 5 of the invention are directly coupled (integrated) to drive-operate the data line by the direct use of stored digital data. Accordingly, for convenience (in relation to Fig. 1), the digital data driver 4 is configured by the k-bit DAC section 41, and the frame memory section 5 is configured by the column decoder 51, the input control circuit 52, the column selection switch section 53, the memory row decoder 54, the word driver 55, the memory cell section 56 and the sense amplifier section 57. However, <sup>it is to be understood that</sup> ~~actually~~ such distinction cannot be exactly made if considering the operational relationship between the digital data driver and the frame memory in the conventional use.

[0081] The memory controller 6 controls as  $k \times 3$  image signals in order to store the display data transmitted from the CPU 110A into the frame memory section 5. Also, the timing controller 7 has at least an address buffer 71 and transmit an address signal to the row decoder 31, column decoder 51 and memory row decoder 54 in order to store or display the display data transmitted from the CPU 110A.

[0082] In the case of configuring the memory by chips or the like, it is problematic in what way fine provision can be made within the chip and layout be given by taking interconnection ~~etc~~ into consideration. Where the peripheral circuit such as the memory on a glass substrate, conception differs from that. It is the active-matrix LCD section 2 as an actual display part that occupies over the greatest area on

the glass substrate. Moreover, the pitch of pixels (ultimately the entire size) is fixed. Consequently, it is the problem that the system, such as peripheral circuits, is laid out with efficiency in accordance with the size. Although the memory cells can be lessened if considering space saving without considering consumption power, the reduction of consumption power requires memory cells for storing data in amount of one screen. Therefore, the present embodiment aims at presenting the most efficient layout on the basis of establishing a peripheral circuit in order for reducing consumption power.

[0083] Next, explanation will be made on the operation of display ~~on the~~ <sup>the as shown in</sup> ~~basis of~~ Fig. 2. The CPU 110A transmits display data ~~where~~ <sup>in order</sup> to provide change in display. Consequently, where the image does not change, no display data is transmitted. When changing the display, an address signal is transmitted representative of a point (pixel) to be changed in display. Also, a display-data image signal is transmitted. Herein, the frame memory section 5 is provided with word lines corresponding in ~~the~~ <sup>in order</sup> number to scanning lines, ~~to enable~~ <sup>it to</sup> store display data (image signal) in amount of one screen corresponding to the respective dots. Moreover, the row decoder 31 and the memory row decoder 54 are provided to enable selection of a scanning line and word line. Accordingly, a scanning line can be selected and driven randomly according to an address signal without requiring sequential scanning, which is convenient for rewriting display data as required. Also, in order to achieve space saving by simplifying the interconnections and reducing the circuit area, the same address signal is inputted to the row decoder 31 and the memory row decoder 54, respectively causing the corresponding sections to store and display in the same timing. As for the column decoder 51, random pixel selection can be made according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line.

[0084] In the case of not providing change in display, the digital data of the image signal stored in the frame memory section 5 is used as it is for making display, wherein no data transmission and reception is made to and from the CPU 110A. However, because the LCD requires alternating-current drive, there is a need of drive using pixel-inversion drive while refreshing at least at a required minimum frequency. This control is made with the scanning line driver 3 and the digital data driver 4. If the frequency is lowered, consumption-power reduction can be made ~~but~~ <sup>however some</sup> flicker

<sup>may occur</sup>  
~~occurs~~ due to punch-through voltage or the like. Therefore, in order to make <sup>the</sup> flicker <sup>unnoticeable</sup>  
~~not conspicuous~~ while reducing power consumption, the state of display is maintained  
 with refreshing at a frequency, for example, of 30 Hz for still images (liquid crystal  
 driven at 15 Hz).

5           **[0085]** As concerned with the frame memory section 5, if the memory cells  
 are constituted by static memories, there is no need to rewrite data (refresh).  
 However, if constituted by dynamic memories, there is a necessity of refreshing in  
 such timing as can hold the storage.

10           **[0086]** As above, according to the first embodiment, where a system  
 including not only a display part but also peripheral circuit on a substrate, as in SOP, is  
 integrally formed on a substrate, in the memory cell section 56 of the frame memory  
 section 5, memory cells are formed to be arranged such that the length in the row  
 direction of arrangement of memory cells with an amount required for controlling  
 one-dot display is equal to or smaller than a pitch of dots, i.e., the length in the row  
 15           direction of the memory cell section 56 is equal to or smaller than the length in the  
 row direction of the active-matrix LCD section 2. Accordingly, it is possible to  
 arrange memory cells in amount of one row with saved space width.

**[0087]** Also, this is similarly made for the sense amplifier section 57 and k-  
 bit DAC section 41, achieving space saving.

20           **[0088]** Also, the number of rows of the memory array is given the same as  
 the number of scanning lines (i) to enable the frame memory section 5 to store display  
 data (image signal) in amount of one screen. Accordingly, it is possible to store data  
 in amount of one screen with correspondence between the pixel in each position and  
 the memory cell of the memory cell section 56. The image signal only in amount of  
 25           display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU  
 110A. Accordingly, the data transmission amount over the entire system can be  
 decreased, and space-saved forming can be made with the maximum efficiency while  
 achieving the reduction of power consumption.

30           **[0089]** Also, because the row decoder 31 and the memory row decoder 54  
 are provided to enable selection of a scanning line and word line to be driven on the  
 basis of an address signal, a scanning line can be selected and driven randomly  
 according to an address signal without the necessity of sequential scanning. This is  
 convenient for rewriting display data as required.

[0090] Also, because the same address signal is inputted to the row decoder 31 and the memory row decoder 54 to cause the respective corresponding points to perform storage and display in the same timing, space saving can be made due to simplification of interconnections and reduction of circuit area.

5 [0091] Also, because the row decoder 51 can randomly select a pixel according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line. This is convenient for rewriting display data as required.

10 [0092] Also, because the input control circuit 52 and the column selection switch section 53 are arranged on a side opposite to the active-matrix LCD section 2 sandwiching the memory cell section 56, crossover of interconnections is decreased thus achieving simplicity and consumption-power reduction. Moreover, there occurs no noise superposition over the analog-driven LCD 2 due to operation of the input control circuit 52 and column selection switch section 53, thus reducing noise in display.

15 [0093] Furthermore, because the memory controller 6 and the timing controller 7 are integrally formed on the panel 1, the panel 1 can be directly coupled to the CPU 110A, thus providing cost reduction, reliability and space saving for the system entirety.

20 ~~Embodiment 2~~

[0094] Fig. 3 is a figure showing in detail <sup>an exemplary</sup> panel 1A according to a second embodiment of the invention. The panel 1A of Fig. 3 differs from the panel 1 of Fig. 2 in that address signals are independently inputted to the row decoder 31 and the memory row decoder 54. Due to this, it is possible to make the timing of storage different from the timing of display operations. The drive frequency is higher than that of storage and display operations in simultaneous timing. However, various forms of driving is feasible, e.g., address data is transmitted to the memory row decoder 54 in certain timing to make storage operation, and then address data is transmitted to the row decoder 31 in the next timing to make display.

30 [0095] As above, according to the second embodiment, because address signals are independently inputted respectively to the row decoder 31 and the memory row decoder 54, it is possible to enhance the freedom for selecting a drive method.

~~Embodiment 3~~

[0096] Fig. 4 is a figure showing in detail <sup>an exemplary</sup> panel 1B according to a third embodiment of the invention. The panel 1B of Fig. 4 differs from the panel 1 of Fig. 2 in that a scanning line-select-control signal line and a word line-select-control signal line are respectively laid from the address buffer 71 to the row decoder 31A and the memory row decoder 54A, to transmit a scanning line-select-control signal and a word-line-select-control signal. The same address signal is inputted to the row decoder 31A and the memory row decoder 54A. However, the row decoder 31A is allowed to select a scanning line only during the period that a scanning line-select-control signal is on. Also, the memory row decoder 54A similarly is allowed to select a word line only during the period that a word-line-select-control signal is on. Consequently, storage and display operations can be made in different timing depending upon control of on-off of these signals.

[0097] As above, according to the third embodiment, the scanning line-select period of the row decoder 31A is limited on the basis of the scanning line-select-control signal and the word-line-select period of the memory row decoder 54A is limited on the basis of the word-line-select-control signal. Therefore, it is possible to enhance the freedom for selecting a drive method for storage and display operations. Accordingly, various ones of drive control are feasible depending on the method.

~~[0098] Fig. 5 is a figure representing in detail a panel 1C according to a fourth embodiment of the invention. The panel 1C of Fig. 5 differs from the panel 1B of Fig. 4 in that a column selection switch section 53A, a sense amplifier section 57A and memory cell section 56A are laid out taking into account a case such as  $k = 6$ .~~

Also, the column decoder 51A and the input control circuit 52A, respectively, deal with signals in two times due to  $k = 6$ , as compared to the column decoder 51 and the input control circuit 52 (besides this, different from the panel 1 of Fig. 2 in that there are a scanning line-select-control signal line and a word-line-select-control signal line). As described before, if the memory cells are arranged such that the length in the row direction of the memory cell section 56 is equal to or smaller than the length in the row direction of the active-matrix LCD section 2, then the memory cells in one column can be arranged most efficiently with a saved space width. Accordingly, it is ideal to arrange the memory cells in amount of  $k$  bits in the row direction to have a

length equal to or smaller than the pitch of dots. However, if increasing the tonal level, the value of k increases (64 tonal levels at  $k = 6$ , display possible in about 260 thousand colors). That is, there is an increase in the number of memory cells to store 1-dot data. Due to this, it is to be considered that the arrangement of memory cells in amount of k bits as they are will exceeds the pitch of dots. Accordingly, the present embodiment has a memory array in a multi-stage configuration in the memory cell section 56A, wherein the memory cells are laid out and integrally formed to have such an arrangement that the length in the row direction of the memory cell section 56A is equal to or smaller than the length in the row direction of the active-matrix LCD section 2.

[0099] Meanwhile, it is to be ~~considered~~<sup>understood</sup> as another way of thinking that the number of memory-array rows is provided integer times the number of scanning lines to constitute a 1-dot memory cells in a plurality of rows. In this case, the k-bit DAC section 41 time-division-processes digital data to drive the data line.

[0100] As above, according to the fourth embodiment, where the length of arrangement of k-bit memory cells in the row direction cannot be given equal to or smaller than the pitch of dots, the memory array is made in a multi-stage configuration to have layout and integral formation such that the length in the row direction of the memory cell section 56A equal to or is smaller than the length in the row direction of the active-matrix LCD section 2. Accordingly, it is possible to facilitate interconnections between the memory cell section 56A and the k-bit DAC section 41. Thus, space saving can be achieved.

#### ~~Embodiment 5~~

[0101] Fig. 6 is a figure representing in detail a panel 1D according to a fifth embodiment of the invention. The panel 1D of Fig. 6 differs from the panel 1B of Fig. 4 in arrangement of memory cells in the memory cell section 56B, and in that the image signals for two pixels are simultaneously inputted so that the column decoder 51B can select two pixels simultaneously. Furthermore, the input control circuit 52A and the column selection switch section 53A respectively deal with signals in two times as compared to the input control circuit 52 and the column selection switch section 53A.

[0102] The fourth embodiment explained on the case that the length of arrangement of memory cells in amount of k bits is longer than the pitch of pixels.

Conversely, the length of arrangement of memory cells in amount of plurality of pixels (dots) is equal to or smaller than the pitch of one pixel (dot), it is possible to further save the space by laying out and integrally forming the memory cells in amount of a plurality of pixels (dots) arranged corresponding to the one-pixel (dot) pitch. However, in this case, the same number of word lines as the scanning lines are provided to provide memory cells corresponding to the dots without sharing the word lines. It is noted that in this case the sense amplifier section 57 can be shared.

[0103] Also, in the first to fourth embodiments the row decoder 51 was configured to select one pixel, as in Fig. 2 to Fig. 5. However, <sup>it is to be understood that</sup> the present invention is not limited to this, but may be made to select integer-times simultaneously. In this case, the image signal is inputted in proportion to the multiple.

[0104] As above, according to the fifth embodiment, where the length of arrangement with memory cells in amount of plurality of pixels (dots) is equal to or smaller than the length of one-pixel (dot) pitch, the memory cells in amount of plurality of pixels (dots) are laid out and integrally formed by arrangement corresponding to the one-pixel pitch. Accordingly, space saving can be further achieved. Moreover, the sense amplifier section 57 can be shared. Also, because the column decoder 511 can select two pixels simultaneously, the drive frequency can be lowered and power-consumption reduction be achieved despite interconnection is complicate. Also, sufficient operation is obtained even if driven by the active elements inferior in characteristic to the single-crystal FETs.

~~Embodiment 6~~

[0105] Fig. 7 is a figure representing in detail a panel 1E according to a sixth embodiment of the invention. The panel 1E of Fig. 7 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix OEL section 8 as a display drive section and in that the k-bit DAC section 41 is not used.

[0106] OEL (organic Electro Luminescent) means an organic EL element. This OEL element is a spontaneous luminescent device different from liquid crystal. Consequently, the device has the following features, <sup>;</sup> and is expected in the display field and other fields.

- (1) wide view angle ;
- (2) reduction of weight and thickness feasible ;

- (3) high contrast ratio ;
- (4) low power consumption (back light not required) ;
- (5) multi-color feasible due to molecular design ; and
- (6) high-definition display feasible owing to current drive .

5        [0107] Fig. 8 is a figure showing <sup>an exemplary</sup> circuit arrangement of an active-matrix OEL section 8. Fig. 8 shows an arrangement with two pixels. As described before, LCD requires alternating-current drive for the purpose of extending the life of liquid crystal. Consequently, analog conversion is generally implemented without using digital data as it is. Where making OEL luminous, usually digital data is analog-converted, e.g. two transistor scheme is used to hold the converted analog signal (data) on a capacitance or the like. The output current of the transistor is controlled with the converted analog data to control the luminescence of OEL. It is noted that OEL is driven on direct current (DC drive). On the other hand, as shown in Fig. 8, it is possible to deal with digital data such as an image signal, as it is, stored on each memory.

10        [0108] Next, explanation will be made on a method for displaying display data stored on the frame memory by exemplifying the dot of R1 (R of a pixel on the first column). R1 is provided with seven OEL elements to display eight tone levels. The seven OEL elements are grouped with one OEL element, two OEL elements and four OEL elements respectively, connected to R1S, R1T and R1U corresponding to each bit line. The difference in tonal level is expressed by luminescent area. Accordingly, at tonal level 0, R1S, R1T and R1U are not driven not to emit any of the elements. At tonal level 1, R1S is driven to make one OEL element luminous. Similarly, at tonal level 2, R1T is driven to make two OEL elements luminous, and at tonal level 3, R1S and R1T are driven to make three OEL elements luminous. Tonal level is represented by the combination of them. This is <sup>also</sup> true for the dots of G and B.

25        [0109] Herein, OEL may be DC driven, and refresh due to inversion drive is usually unnecessary where change in displaying is not required. It is noted that a dynamic circuit is used in Fig. 8. Accordingly, even if there is no change in displaying, there is need to maintain displaying by refreshing at a constant time interval on the basis of the data stored in each memory cell in the frame memory section 5.



is 28 d as  
[0110] Although Fig. 7 describes ~~corresponding~~ to Fig. 2 as the first embodiment, it is ~~needless to say~~ that the active-matrix OEL section 8 is applicable to the display devices employing the respective panels of the second to fifth embodiments. ~~is to be understood~~ without departing from the spirit + scope of the present invention.

5 [0111] Also, although the sixth embodiment shows the example to implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the OEL elements in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

10 [0112] As above, according to the sixth embodiment, because OEL element as spontaneous luminescent device is used for display, it is possible not only to obtain the effects of the first to fifth embodiments but also to reduce power consumption and weight due to unnecessary of back light. Moreover, because tonal representation is feasible by using the digital data to be stored in the frame memory section 5, as it is, without analog conversion, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

Embodiment 7

20 [0113] Fig. 9 ~~is a figure representing~~ <sup>shows</sup> in detail a panel 1F according to a seventh embodiment of the invention. The panel 1F of Fig. 9 differs from the panel 1E of Fig. 7 in that the section for actual display is made as an active-matrix LCD section 2A as a display drive section.

25 [0114] Incidentally, the panel 1F of Fig. 9 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix LCD section 2A and in that the k-bit DAC section 41 is not employed.

[0115] Fig. 10 is a figure showing ~~a~~ <sup>an exemplary</sup> circuit arrangement of the active-matrix LCD section 2A. Fig. 10 shows an arrangement with two pixels. As described before, because LCD requires alternate-current drive for the purpose of extending the life of liquid crystal, analog conversion is generally made without using digital data as it is. The configuration of Fig. 10 is made to deal with digital data such as the image signal stored on each memory cell, as it is, as hereinafter described.

30

an exemplary 29

[0116] Next, a method for displaying the display data stored in the frame

memory will be explained by exemplifying the dot of R1 (R on the first column pixel). R1 has three liquid crystal regions respectively covered with independent pixel electrodes in order to represent eight tonal levels. The three liquid crystal regions are

5 in area ratio of 1:2:4 and connected to R1S, R1T and R1U corresponding to each bit line. Meanwhile, the region of the active-matrix LCD section 2A, other than the liquid crystal regions, i.e. the entire region excepting the pixel electrodes, are shaded. Accordingly, the difference of tonal level is represented as an area of the liquid crystal region in a transmissive state. Hence, at tonal level 0, R1S, R1T and R1U are not

10 driven to make every liquid crystal region in a shade state. At tonal level 1, R1S is driven to make the liquid crystal region of the area ratio 1 in a transmissive state. Similarly, at tonal level 2, R1T is driven to make the liquid crystal region of the area ratio 2 in a transmissive state, and at tonal level 3, R1S and R1T are driven to make the liquid crystal regions of the area ratio 1 and area ratio 2 in a transmissive state.

15 Tonal level is represented by this combination. This is <sup>also</sup> true for the dots of G and B.

[0117] In this embodiment, a rectangular wave is supplied to the common feed line VLC to apply voltage to each liquid crystal region. The voltage of the rectangular wave to be supplied to the common feed line VLC is a voltage that positive and negative potentials can completely raise the liquid crystal. Also, the

20 frequency of the rectangular wave is the same as the frequency of an alternating-current drive in the usual liquid crystal display device. This realizes a digital-compatible active-matrix LCD section 2A.

[0118] Incidentally, because Fig. 10 of the present embodiment uses a dynamic circuit similarly to Fig. 8 of the sixth embodiment, there is a need to sustain displaying by refreshing at a constant time interval on the basis of the data stored on

25 each memory cell of the frame memory section 5.

[0119] Although Fig. 9 describes corresponding to Fig. 2 as the first embodiment, it is ~~is to be understood~~ <sup>is to be understood</sup> needless to say that the digital-compatible active-matrix LCD section 2A is applicable to the display devices employing the respective panels of the

30 second to fifth embodiments. <sup>without departing from the spirit + scope</sup>

[0120] Although the seventh embodiment explained the arrangements or the like on the assumption of the transmissive type LCD, the similar idea is applicable even in a reflective type LCD. In a reflective type LCD, because the devices can be

arranged at an underside of the pixel electrodes, more complicated circuit will be feasible and advantageous for achieving multi-bit.

[0121] Also, although the seventh embodiment shows the example to implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the liquid crystal in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

[0122] As above, according to the seventh embodiment, because the digital data to be stored in the frame memory section 5 can be used as it is without analog conversion to provide tonal representation, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

~~Embodiment 8~~

[0123] Incidentally, although the above embodiments explained on the assumption of the color display, the present invention can cope with a monochromatic display.

~~INDUSTRIAL APPLICABILITY~~

[0124] As above, according to the invention of ~~claims 1 and 2~~ where integral formation is made using TFTs including a peripheral circuit, for example on polysilicon, memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section were allocated corresponding to a length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver and memory cell section allocated to have a row length smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

[0125] Also, according to the invention of ~~claims 3 and 4~~ where a display drive circuit for display control using, for example, an organic EL element is integrally formed including a peripheral circuit on polysilicon, memory cells in the number capable of storing an image signal for performing display control of dots in at

least one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

[0126] Also, according to the <sup>embodiments of the</sup>inventions of ~~claims 5 and 6~~ where a display drive circuit for display control using a liquid crystal is integrally formed including a peripheral circuit, for example, on polysilicon, the memory cells in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding the length in the row direction of the display drive section, beside the column decoder section and column section switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, because the organic EL elements are DC-driven, an image signal of a digital signal can be directly used, eliminating the necessity of providing such a circuit as DAC, for example.

[0127] Also, according to the <sup>embodiments of the</sup>inventions of ~~claims 7 and 8~~ where a display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit for example on polysilicon, the memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section and column selection switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, the organic EL element is DC-driven, an image signal of a digital signal can be directly used, thus eliminating the necessity of using such a circuit as DAC, for example.

[0128] Also, according to the invention ~~of claim 9~~, even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, the space-saved width can be achieved with efficiency.

[0129] Also, according to the invention ~~of claim 10~~, a word line driver section for selecting and driving the word lines provided in the number equal to the scanning lines is further integrated on and formed integrally with the substrate, and the memory cell section is structured by a memory array corresponding to the dot arrangement of the display drive section, to store an image signal required for display over one screen. Accordingly, external exchange of data amount is decreased, achieving reduction in power consumption.

[0130] Also, according to the invention ~~of claim 11~~, the scanning line driver section and word line driver section is made to select a scanning line and word line to be driven on the basis of an address signal. Accordingly, no sequential scanning is required, and random selection and drive of the scanning line can be made in accordance with the address signal. This is convenient in rewriting display data as required.

[0131] Also, according to the invention ~~of claim 12~~, because the same lines are shared in the scanning line driver section and the word line driver section, it is possible to achieve space saving due to simplification of interconnections and reduction in circuit area.

[0132] Also, according to the invention ~~of claim 13~~, because independent address signals are inputted to the scanning line driver section and the word line driver section, it is possible to enhance the freedom in storage and display operations.

[0133] Also, according to the invention ~~of claim 14~~, scanning line driver section operates to select and drive the scanning line on the basis of the address signal only when a scanning line driver control signal is inputted and the word line driver section operates to select and drive the word line on the basis of the address signal only when a word line driver control signal is inputted. Accordingly, it is possible to

enhance the freedom in selecting a driving way of storage and display operations. Due to this, a variety of drive control is feasible depending on the method.

[0134] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 15~~, the column decoder section is made to randomly select a memory cell to store an image signal due to the address signal. Accordingly, there is no need to write sequentially onto the dots on the same scanning line, and random writing can be made. This is convenient in rewriting display data as required.

[0135] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 16~~, image signals are inputted on one-pixel-unit basis, based on an input of which the column decoder section selects a memory cell in amount of one pixel as a display-change unit thus being convenient.

[0136] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 17~~, image signals are inputted on a plurality-of-pixel-unit basis, wherein the column decoder section selects a memory cell in amount of a plurality of pixels based on an input thereof. Accordingly, interconnections may be complicated but drive frequency can be decreased thus achieving reduction in power consumption. Also, sufficient operation is available if driving with the active element inferior in characteristic to single crystal FET.

[0137] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 18~~, the image-signal-input interconnection and column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section. Accordingly, it is possible to achieve the reduction in power consumption by decreasing the crossover of interconnections and prevent superposition of noise on the display screen due to the effects of switching or the like.

[0138] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 19~~, a multi-stage structure is given in the structure and the formation. Accordingly, even where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section because, for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, the interconnections can be facilitated and space saving be achieved.

[0139] Also, according to the <sup>embodiments of the</sup> invention of ~~claim 20~~, the structure is made by a plurality of rows. Accordingly, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section because,

for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, it is possible to suppress the length in the row direction despite the length in the column direction broadens.

5 [0140] Also, according to the <sup>embodiment of the</sup>inventions ~~of claims 21 and 22~~, where a plurality of rows of memory cells can be allocated corresponding to the length in the row direction of the display drive section, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array allocated corresponding to the length in the row direction of the display drive section (e.g. the memory cells allocated to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, space saving is further achieved.

10 [0141] Also, according to the <sup>embodiment of the</sup>invention ~~of claim 23~~, a timing controller section for controlling timing of transmitting the address signal and a memory controller section for controlling to transmit the image signal are further integrated on the substrate and integrally formed therewith, to systematically, integrally forming all the peripheral circuit required for display control on the same substrate. Accordingly, the system entirety can be made at low cost, reliable and space-saved.

15 [0142] Also, according to the <sup>embodiment of the</sup>invention ~~of claim 24~~, a D/A converter is provided between the display drive section and the memory cell section to supply the image signal converted into an analog signal to the display drive section. Accordingly, display can be made by the display drive section compatible with analog signals.

20 [0143] Also, according to the <sup>embodiment of the</sup>inventions ~~of claims 25 and 26~~, the display drive section and the memory cell section are directly coupled together to directly supply an image signal comprising a digital signal to the display drive section. Accordingly, display can be made by the display drive section compatible with digital signals, and consumption power be reduced.

25

## CLAIMS

1. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver section allocated corresponding to a length in a column direction of said display drive section, to select and drive said scanning lines;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in a row direction of said display drive section;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

a data line driver section allocated corresponding to the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

2. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a row direction of said display drive section, to select and drive said scanning lines;



a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section;

5 a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

10

a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

15

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

### 3. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL elements connected to said active elements by driving said scanning lines and said data lines to perform display control;

20

a scanning line driver section allocated corresponding to a length in a column direction of said display drive section, to select and drive said scanning lines;

25

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in the row direction of said display drive section;

30 a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive section to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

5           a data line driver section allocated corresponding to the length in the row direction of said display drive section to drive said data lines on the basis of the image signal stored in said memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

4. A display device, comprising:

10           a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to said active elements by driving said scanning lines and said data lines to perform display control;

15           a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in the column direction of said display drive section, to select and drive said scanning lines;

            a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of  
20           said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section;

            a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

25           a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

30           a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit line, and a liquid crystal controlled in display by driving the corresponding said scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of said display drive section;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, and to select and memory cells for storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cell selected by said column decoder section,

integrated on a semiconductor or insulating substrate and integrally formed therewith.

6. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal controlled in display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section, and each of the memory cells being connected to each of the bit lines;

a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

7. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in the row direction of said display drive section, and each of the memory cells being connected to each of the bit lines;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cell selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

8. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of

said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section and each of the memory cells being connected each of the bit lines;

a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

9. A display device as claimed in any one of claims 1 to 8, wherein the number of said memory cells, which is allocated corresponding to the length in the row direction of said display drive section and capable of storing the image signal for display control of the dots on one row of said display drive section, is structured redundantly.

10. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section connects said memory cells in the number capable of storing an image signal for display control of the one-row dots to each of word lines in the number equal to the number of said scanning lines and is structured with a memory array corresponding to dot arrangement of said display drive section, and

a word line driver section for selecting and driving said word lines are further integrated on and integrally formed with said substrate.

11. A display device as claimed in claim 10, wherein, on the basis of an address signal representative of a display position and a storage position, said scanning line driver section selects said scanning lines and said word line driver section selects said word lines.

12. A display device as claimed in claim 11, wherein the same address signal is inputted to said scanning line driver section and said word line driver section.

13. A display device as claimed in claim 11, wherein independent address signals are inputted to said scanning line driver section and said word line driver section.

14. A display device as claimed in claim 11, wherein said scanning line driver section operates to select and drive said scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and said word line driver section operates to select and drive said word lines on the basis of the address signal only when a word line driver control signal is inputted.

15. A display device as claimed in claim 11, wherein said column decoder section selects the memory cell to store an inputted image signal on the basis of the address signal.

16. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of one-pixel, and said column decoder section selects the memory cell in an amount of one pixel.

17. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of a plurality of pixels, and said column decoder section selects the memory cell in an amount of a plurality of pixels.

18. A display device as claimed in any one of claims 1 to 8, wherein an input interconnection for the image signal to be stored in said memory cell and said column selection switch section are formed on a side opposite to said display drive section sandwiching said memory cell section therebetween.

19. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is allocated with the memory cell corresponding to the length in the row direction of said display drive section and formed in a multi-stage structure.

20. A display device as claimed in claim 10, wherein said word lines are provided in the number of integer times the number of the scanning lines, and said memory cell section is structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of said display drive section to the word lines in the number of the integer times.

21. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated corresponding to the length  
5 in the row direction of said display drive section.

22. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated to have a length in the row  
10 direction equal to or smaller than the length in the row direction of said display drive section.

23. A display device as claimed in any one of claims 11 to 22, further comprising:

a timing controller section for controlling timing of transmitting the address  
15 signal, and

a memory controller section for controlling to transmit the image signal,  
integrated on a semiconductor or an insulating substrate and integrally formed  
therewith.

24. A display device as claimed in any one of claims 1 to 8, wherein a D/A  
20 converter is provided between said display drive section and said memory cell section for converting the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to said display drive section.

25. A display device as claimed in any one of claims 1 to 8, wherein said display drive section and said memory cell section are directly coupled to supply the  
25 image signal comprising a digital signal stored in said memory cell section to said display drive section.

26. A display device as claimed in claim 25, wherein said display drive section performs digital drive through area tonal level, time-division tonal level or a combination thereof.

~~—To obtain a display device taking into consideration layout efficiency, etc., in the case of integrally forming a peripheral circuit on a glass substrate.~~

5 LCD section ~~X~~ having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots, and active elements according to the respective intersections to perform display control using a liquid crystal by driving the scanning lines and the data lines, ~~X~~ a row decoder ~~X~~ for selecting the scanning lines, a memory cell section ~~X~~ having memory cells that are in the number capable of storing an image signal for display control of dots in at least one row of a display drive section and allocated corresponding to the length in the row direction of the display drive section, ~~X~~ a column decoder section ~~X~~ for selecting a memory cell to be stored with an inputted image signal, a column selection switch section ~~X~~ switching on the basis of a selection by the column decoder section 51 and the image signal and storing the image signal to the memory cell selected, and a k-bit DAC section 41 for driving a data line on the basis of the image signal stored in the memory cell section.



FIG. 1

110 IMAGE SIGNAL SOURCE

1: PANEL

2 ACTIVE-MATRIX LCD SECTION

3 SCANNING LINE DRIVER

4 DIGITAL DATA DRIVER SECTION

5 FRAME MEMORY SECTION

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

FIG. 2

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51 COLUMN DECODER (j OUTPUT)

 $k \times 3$  IMAGE SIGNAL

52 INPUT CONTROL CIRCUIT

53 COLUMN SELECT SWITCH SECTION

54 MEMORY ROW DECODER

55 WORD DRIVER (i OUTPUT)

56 MEMORY CELL SECTION

57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 k-BIT DAC SECTION

1 PIXEL

31 ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION ( $i \times j$  PIXELS)

1: PANEL

FIG. 3

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51 COLUMN DECODER (j OUTPUT)

k×3 IMAGE SIGNAL

52 INPUT CONTROL CIRCUIT

53 COLUMN SELECT SWITCH SECTION

5 54 MEMORY ROW DECODER

55 WORD DRIVER (i OUTPUT)

56 MEMORY CELL SECTION

57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 k-BIT DAC SECTION

10 1 PIXEL

31 ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)

1A: PANEL

15 FIG. 4

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

20 51 COLUMN DECODER (j OUTPUT)

SCANNING LINE SELECTION CONTROL SIGNAL LINE

WORD SELECTION CONTROL SIGNAL LINE

k×3 IMAGE SIGNAL

52 INPUT CONTROL CIRCUIT

25 53 COLUMN SELECT SWITCH SECTION

54A MEMORY ROW DECODER

55 WORD DRIVER (i OUTPUT)

56 MEMORY CELL SECTION

57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)

30 41 K-BIT DAC SECTION

1 PIXEL

31A ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION ( $i \times j$  PIXELS)

1B: PANEL

FIG. 5

6 MEMORY CONTROLLER

5 7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51A COLUMN DECODER ( $j$  OUTPUT)

SCANNING LINE SELECTION CONTROL SIGNAL LINE

10 WORD SELECTION CONTROL SIGNAL LINE

$k \times 3$  IMAGE SIGNAL

52A INPUT CONTROL CIRCUIT

53A COLUMN SELECTION SWITCH SECTION

54A MEMORY ROW DECODER

15 55 WORD DRIVER ( $i$  OUTPUT)

56A MEMORY CELL SECTION

57A SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 K-BIT DAC SECTION

1 PIXEL

20 31A ROW DECODER

32 SCANNING LINE DRIVE BUFFER ( $i$  OUTPUT)

2: ACTIVE-MATRIX LCD SECTION ( $i \times j$  PIXELS)

1C: PANEL

FIG. 6

25 6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51B COLUMN DECODER ( $j$  OUTPUT)

30 SCANNING LINE SELECTION CONTROL SIGNAL LINE

WORD SELECTION CONTROL SIGNAL LINE

$k \times 2 \times 3$  IMAGE SIGNAL

52A INPUT CONTROL CIRCUIT

53A COLUMN SELECTION SWITCH SECTION

54A MEMORY ROW DECODER

55 WORD DRIVER (i OUTPUT)

56B MEMORY CELL SECTION

5 57A SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 K-BIT DAC SECTION

31A ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)

10 1D: PANEL

FIG. 7

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

15 71 ADDRESS BUFFER

51 COLUMN DECODER (j OUTPUT)

SCANNING LINE SELECTION CONTROL SIGNAL LINE

WORD SELECTION CONTROL SIGNAL LINE

k×3 IMAGE SIGNAL

20 52 INPUT CONTROL CIRCUIT

53 COLUMN SELECTION SWITCH SECTION

54 MEMORY ROW DECODER

55 WORD DRIVER (i OUTPUT)

56 MEMORY CELL SECTION

25 57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)

31 ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

8: ACTIVE-MATRIX OLED SECTION (i×j PIXELS)

1E: PANEL

30 FIG. 8

1 PIXEL

FIG. 9

6 MEMORY CONTROLLER

7 TIMING CONTROLLER  
 ADDRESS SIGNAL  
 71 ADDRESS BUFFER  
 51 COLUMN DECODER (j OUTPUT)  
 5 k×3 IMAGE SIGNAL  
 52 INPUT CONTROL CIRCUIT  
 53 COLUMN SELECTION SWITCH SECTION  
 54 MEMORY ROW DECODER  
 55 WORD DRIVER (i OUTPUT)  
 10 56 MEMORY CELL SECTION  
 57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)  
 1 PIXEL  
 31 ROW DECODER  
 32 SCANNING LINE DRIVE BUFFER (i OUTPUT)  
 15 2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)  
 1: PANEL  
 FIG. 10  
 1 PIXEL  
 FIG. 11  
 20 100 IMAGE SIGNAL SOURCE  
 100C FRAME MEMORY  
 100D LCD CONTROLLER  
 IMAGE SIGNAL  
 101B DIGITAL DATA DRIVER  
 25 101C LIQUID CRYSTAL PANEL  
 101A SCANNING LINE DRIVER  
 TIMING DATA  
 101 TFT LIQUID CRYSTAL DISPLAY PANEL

SPECIFICATION  
DISPLAY DEVICE

TECHNICAL FIELD

5 [0001] The present invention relates to display devices. More particularly, the invention relates to a drive circuit or the like to make display on a liquid crystal display (LCD: Liquid Crystal Display) or an organic EL display (OELD: Organic Electro Luminescent Display).

BACKGROUND OF THE INVENTION

10 [0002] Recently, display devices using liquid crystal (hereinafter, referred to as display) are spreading at conspicuous pace. The display of this type is low in power consumption and improved in saving space in comparison with a CRT display. Accordingly, it is important to make use of the merits of such a display and produce a display that is lower in power consumption and improved in saving space.

15 [0003] Fig. 11 is a block diagram of a system to implement display through a display device with a TFT display. This system is constituted with an image signal source 100 and a TFT liquid crystal display panel 101. The image signal source 100 is formed, at least, by a CPU 100A, a RAM 100B, a frame memory 100C and an LCD controller 100D. The CPU 100A is operation control means to transmit display data while exchanging data with the RAM 100B as a general-purpose memory. This  
20 memory RAM 100B is not especially provided only as a display memory, and hence requires newly a memory to store data for display. It is the frame memory 100C. The frame memory 100C temporarily stores display data for one screen of a liquid crystal panel 101C (hereinafter, the data for one pixel is given as display data, and each binary signal forming the display data is referred to as an image signal). The LCD  
25 controller 100D is to implement transmission control or the like of display data, in order to display in timing the display data stored in the frame memory 100C in display positions on the liquid crystal panel 101C. Herein, although for the CRT there is a need to transmit the display data through conversion into analog data, the display data herein is transmitted by an image signal as digital data on the assumption that the  
30 interface of the liquid crystal display corresponds to digital data. If the image signal is digital data, D/A conversion is not required on the side of the TFT liquid crystal display panel 101.

[0004] Meanwhile, the TFT liquid crystal display panel 101 is structured with a scanning line driver 101A, a digital data driver 101B and a liquid crystal panel 101C. The scanning line driver 101A controls display in a scanning line (row) direction on the basis of timing data transmitted from the LCD controller 100D. The digital data driver 101B can receive and process digital-data image signal. The digital data driver 101B controls display in a data-line (column) direction on the basis of timing data transmitted from the LCD controller 100D. Thereupon, display tonal level is also controlled. The liquid crystal panel 101C is a panel having TFTs (Thin Film Transistors) to make display under the control of the scanning line driver 101A and digital data driver 101B.

[0005] In such a system, the LCD controller 100D must transmit to the digital data driver 101B the display-data image signal for the entire screen temporarily stored in the frame memory 100C. Moreover, transmission timing by progressive scanning is fixed. Consequently, there is a need to transmit image signals in timing also for the display data on the pixels not requiring display change. Due to this, there is an increase in useless data transmission amount and hence increase in power consumption. Thus, reduction of power consumption cannot be achieved.

[0006] Therefore, it is an object of the present invention to obtain a display device of a space-saved design having a structure for achieving consumption-power reduction and moreover taking into consideration layout efficiency particularly for the case of integrally forming the peripheral circuit over a glass substrate.

#### DISCLOSURE OF THE INVENTION

[0007] A display device of the invention of claim 1 comprises: a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines; a scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning lines; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section; a column decoder section allocated corresponding to the length in the row direction of the

display drive section, to select the memory cells for storing an input image signal; a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section; and a data line driver section allocated corresponding to the length in the row direction of the display drive section to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

10           **[0008]** In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate, for example, of a glass substrate, or a quartz substrate, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section, column select switch section and data line driver section.

15           **[0009]** It is noted that the points "allocated corresponding to a length in a column direction" and "allocated corresponding to a row direction" mean that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means "the length in the row direction is equal to or smaller than the length in the row direction of the display drive section", as limited in the invention of claim 2. The meaning of "equal to or smaller than" is either that the both are equal or that the former is small as compared to the latter. In the invention, however, for example the length in the row direction of the memory cell section may be

20           satisfactorily somewhat greater (e.g. about several %) than the length in the row direction of the display drive section.

25           **[0010]** In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive

30



section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0011] A display device of the invention of claim 2 comprises: a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving the scanning lines and the data lines; a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a column direction of the display drive section, to select and drive the scanning lines; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section; a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal; a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section; and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0012] In this invention, where integral formation is made using polysilicon TFTs including a peripheral circuit on an insulating substrate for example, of a glass substrate, or a quartz substrate, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

[0013] A display device of the invention of claim 3 comprises: a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to the active elements by driving the scanning lines and the data lines to perform display control; a scanning line driver section allocated corresponding to a length in a column direction of the display drive section, to select and drive the scanning line; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section; a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select the memory cells for storing an input image signal; a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section; and a data line driver section allocated corresponding to the length in the row direction of the display drive section, to drive the data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0014] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section.

[0015] It is noted that the points "allocated corresponding to a length in a column direction" and "allocated corresponding to a row direction" mean that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means "the length in the row direction is equal to or smaller than the length in the row direction of the display drive section", as limited in the invention of claim 4. The meaning of "equal to or smaller than" is either that the both are equal or

that the former is small as compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater (e.g. about several %) than the length in the row direction of the display drive section.

5           **[0016]** In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively  
10           broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

**[0017]** A display device of the invention of claim 4 comprises: a display  
15           drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to the active elements by driving the scanning lines and the data lines to perform display control; a scanning line driver section allocated to have a length in a  
20           column direction equal to or smaller than a length in a row direction of the display drive section, to select and drive the scanning lines; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row  
25           direction of the display drive section; a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal; a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch  
30           on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section; and a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to drive the

data lines on the basis of the image signal stored in the memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0018] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed, for example, on polysilicon, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section, in order to achieve space saving, besides the column decoder section, column selection switch section and data line driver section.

[0019] A display device of the invention of claim 5 comprises: a display drive section having a plurality of scanning lines and a plurality of bit line, and a liquid crystal controlled in display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of the display drive section; a column decoder section allocated corresponding to the length in the row direction of the display drive section, to select the memory cells for storing an input image signal; and a column selection switch section allocated corresponding to the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0020] In this invention, where the display drive circuit for display control using a liquid crystal including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0021] It is noted that the point "allocated corresponding to a row direction" means that, for example, in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means "the length in the row direction is equal to or smaller than the length in the row direction of the display drive section", as limited in the invention of claim 6. The meaning of "equal to or smaller than" is either that the both are equal or the that former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may be satisfactorily somewhat greater (e.g. about several %) than the length in the row direction of the display drive section.

[0022] In brief, for the memory cell section, for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0023] A display device of the invention of claim 6 comprise: a display drive section having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal controlled in display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines; a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for string an input image signal; and a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the

column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5 [0024] In this invention, where the display drive circuit for display control using a liquid crystal including a peripheral circuit is integrally formed by using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to  
10 achieve space saving, besides the column decoder section and column selection switch section.

[0025] A display device of the invention of claim 7 comprises: a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the  
15 corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of said display drive section, and each memory cell being connected to each of the bit lines; a column  
20 decoder section allocated corresponding to the length in the row direction of the display drive section to select the memory cells for storing an input image signal; and a column selection switch section allocated corresponding to the length in the row direction of the display drive section to switch on the basis of a selection by the  
25 column decoder section and the image signal and storing the image signal to the memory cell selected by the column decoder section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0026] In this invention, where the display drive circuit for display control using an organic EL element including a peripheral circuit is integrally formed by  
30 using polysilicon TFTs, memory cells of the memory cell section are allocated in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section corresponding to a length in a row direction of the

display drive section in order to achieve space saving, besides the column decoder section and column selection switch section.

[0027] It is noted that the point "allocated corresponding to a row direction" means that, for example in the memory cell section, the length in the row direction thereof corresponds to a length in the row direction of the display drive section. More specifically, this means "the length in the row direction is equal to or smaller than the length in the row direction of the display drive section", as limited in the invention of claim 8. The meaning of "equal to or smaller than" is either that the both are equal or that the former is smaller compared to the latter. In the invention, however, for example, the length in the row direction of the memory cell section may satisfactorily somewhat greater (e.g. about several %) than the length in the row direction of the display drive section.

[0028] In brief, for the memory cell section for example, it is satisfactory, where integrating it together with the display drive section on a substrate, to avoid the occurrence of a useless space on the substrate due to non-correspondence of the dimensions of the memory cell section to the dimensions of the display drive section. The occurrence of a useless space is meant, for example, to cause a comparatively broad space that no circuit is provided on the substrate in an area of the display drive section along a row-direction-side end because the length in the row direction of the memory cell section is largely longer than the length in the row direction of the display drive section.

[0029] A display device of the invention of claim 8 comprises: a display drive section having a plurality of scanning lines and a plurality of bit line, and organic EL elements to be controlled in luminescent display by driving the corresponding ones of the scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form; a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of the display drive section, and each of the memory cells being connected to each of the bit lines; a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to select the memory cells for storing an input image signal; and a column

selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of the display drive section, to switch on the basis of a selection by the column decoder section and the image signal and storing the image signal to the memory cells selected by the column decoder section,  
5 integrated on a semiconductor or insulating substrate and integrally formed therewith.

[0030] In this invention, where the display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit, by using polysilicon TFTs, memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated to have a length in a row direction thereof equal to or smaller than a length in the row direction of the display drive section in order to achieve space saving, besides the column decoder section, and column selection switch section.

[0031] A display device of the invention of claim 9 structures redundant in the number of the memory cells allocated corresponding to the length in the row direction of the display drive section and in the number capable of storing the image signal for display control of the dots on one row of the display drive section.

[0032] In this invention, even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display drive section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section).

[0033] A display device of the invention of claim 10 is that the memory cell section connects the memory cells in the number capable of storing an image signal for display control of the one-row dots to each of the word lines in the number equal to the number of the scanning lines and is structured with a memory array corresponding to dot arrangement of the display drive section, and a word line driver section for selecting and driving the word lines are further integrated on and integrally formed with the substrate.

[0034] In this invention, the memory cell section is structured by a memory array corresponding to the dot arrangement of the display drive section to store an image signal required for displaying one screen thereby providing a structure capable



of reducing data amount externally exchanged and achieving reduction in power consumption. Also, in order to store due to the array structure, on the substrate is integrated and integrally formed therewith a word line driver section to select and drive the word lines provided equal in the number to the scanning lines.

5           **[0035]** A display device of the invention of claim 11 is that, on the basis of an address signal representative of a display position and a storage position, the scanning line driver section selects the scanning lines and the word line driver section selects the word lines.

10           **[0036]** In this invention, a scanning line and a word line can be selected randomly by an address signal to secure the freedom in storage or display with respect to the column direction.

**[0037]** A display device of the invention of claim 12, is that the same address signal is inputted to the scanning line driver section and the word line driver section.

15           **[0038]** In this invention, in order to simplify the interconnections, the same lines can be shared by the scanning line driver section and the word line driver section. Consequently, the same address signal can be inputted in the same timing.

**[0039]** A display device of the invention of claim 13 is that independent address signals are inputted to the scanning line driver section and the word line driver section.

20           **[0040]** In this invention, in order to enhance the freedom in storage and display operations, independent address signals are inputted to the scanning line driver section and the word line driver section, e.g. operation timing can be made different.

25           **[0041]** A display device of the invention of claim 14 is that the scanning line driver section operates to select and drive the scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and the word line driver section operates to select and drive the word lines on the basis of the address signal only when a word line driver control signal is inputted.

30           **[0042]** In this invention, in order to simplify the interconnections while enhancing the freedom of storage and display operations, the scanning line driver section can perform selection and driving operations of a scanning lines on the basis of an address signal only when a scanning line driver control signal is inputted and the word line driver section perform selection and driving operations of a word line on the basis of the address signal only when a word line driver control signal is inputted.

[0043] A display device of the invention of claim 15 is that the column decoder section selects the memory cell to store an inputted image signal on the basis of the address signal.

5 [0044] In this invention, the column decoder section can select randomly a memory cell to store an image signal due to the address signal and secure the freedom in storage and display with respect to the row direction.

[0045] A display device of the invention of claim 16 is that one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of one-pixel ,  
10 and the column decoder section selects the memory cell in an amount of one pixel.

[0046] In this invention, where the display device performs color displays, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of one-pixel as a display change unit. The column decoder section selects memory cells in  
15 an amount of the one pixel on the basis of that input.

[0047] A display device of the invention of claim 17 is that one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal being input on the basis of a unit of a plurality of pixels , and the column decoder section selects the memory cells in an amount of the  
20 plurality of pixels.

[0048] In this invention, where the display device performs color displays, in order to decrease the drive frequency, the three dots provided for displaying the colors of red, blue and green as light source colors are taken as one pixel to input an image signal on the basis of a unit of a plurality of pixels. The column decoder section  
25 selects memory cells in an amount of the plurality of pixels on the basis of that input.

[0049] A display device of the invention of claim 18 is that an input interconnection for the image signal to be stored in the memory cell and the column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section.

30 [0050] In this invention, crossover of interconnections is decreased to improve reduction in consumption power. Also, in order to prevent noise superposition due to the effect of switching or the like, the image-signal input interconnections and the

column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section.

[0051] A display device of the invention of claim 19 is that the memory cell section is allocated with the memory cell corresponding to the length in the row direction of the display drive section and formed in a multi-stage structure.

[0052] In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section by the increase of the memory cell in amount of one dot for example due to increase in the number of tonal levels, the structure and the formation is made by providing multi-stages.

[0053] A display device of the invention of claim 20 is that the word lines are provided in the number of integer times the number of the scanning lines, and the memory cell section structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of the display drive section to the word lines in the number of the integer times.

[0054] In this invention, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section, for example, by memory-cell increase for one dot due to the increase of tonal levels, the structure and the formation is made by providing a plurality of rows.

[0055] A display device of the invention of claim 21 is that the memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated corresponding to the length in the row direction of the display drive section.

[0056] In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned corresponding to the length in the row direction of the display drive section.

[0057] A display device of the invention of claim 22 is that the memory cell section is structured by a memory array having the memory cells that are in the

number capable of storing the image signal for display control of a plurality of rows of the dots of the display drive section and allocated to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section.

[0058] In this invention, where a plurality of rows of memory cells are allocated corresponding to the length in the row direction of the display drive section, in order to save space, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array assigned to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section.

[0059] A display device of the invention of claim 23 further comprises a timing controller section for controlling timing of transmitting the address signal, and a memory controller section for controlling to transmit the image signal, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

[0060] In this invention, the peripheral circuits required for controlling display are all integrally formed systematically on the same substrate.

[0061] A display device of the invention of claim 24 is that a D/A converter is provided between the display drive section and the memory cell section, thereby converting the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to the display drive section.

[0062] In this invention, in order to display in an analog-compatible display drive section, a D/A converter is provided between the display drive section and the memory cell section. In the D/A converter, the image signal after converting into an analog signal is supplied to the display drive section.

[0063] A display device of the invention of claim 25 is that the display drive section and the memory cell section are directly coupled to supply the image signal comprising a digital signal stored in the memory cell section to the display drive section.

[0064] In this invention, display is made in the display drive section compatible with digital signals. No D/A converter or the like is provided between the display drive section and the memory cell section. The image signal remained in the digital signal is supplied to the display drive section.

[0065] A display device of the invention of claim 26 is that the display drive section performs digital drive through area tonal level, time-division tonal level or a combination thereof.

[0066] In this invention, the display drive section compatible with digital signals makes display through area tonal level, time-division tonal level or a combination of the both.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0067] Fig. 1 is a block diagram representing a concept of a system including a display device according to a first embodiment of the present invention.

Fig. 2 is a diagram representing in detail a panel 1.

Fig. 3 is a diagram representing in detail a panel 1A according to a second embodiment of the invention.

Fig. 4 is a diagram representing in detail a panel 1B according to a third embodiment of the invention.

Fig. 5 is a diagram representing in detail a panel 1C according to a fourth embodiment of the invention.

Fig. 6 is a diagram representing in detail a panel 1D according to a fifth embodiment of the invention.

Fig. 7 is a diagram representing in detail a panel 1E according to a sixth embodiment of the invention.

Fig. 8 is a diagram showing a circuit arrangement of an active-matrix OEL section 8.

Fig. 9 is a diagram representing in detail a panel 1F according to a seventh embodiment of the invention.

Fig. 10 is a diagram showing a circuit arrangement of an active-matrix LCD section 2A.

Fig. 11 is a block diagram of a system for display through a display device by a TFT display.

#### BEST MODE FOR CARRYING OUT THE INVENTION

##### Embodiment 1

[0068] Fig. 1 is a block diagram showing a concept of a system including a display device according to Embodiment 1 of the present invention. Fig. 1 represents a concept called system-on-panel (SOP). SOP is the concept to form a peripheral

circuit for display or the like over a glass substrate, and moreover to integrally form TFTs or the like together with the peripheral circuit by the use of poly-silicon or the like without using chips of ICs or the like. Due to this, the panel can be directly coupled to the CPU while achieving low cost, high reliability and space saving.

[0069] In Fig. 1, an image signal source 110 is configured by a CPU 110A to transmit display data. Herein, the display data is transmitted with image signals as digital data, similarly to the conventional configuration shown in Fig. 11. If the image signal is digital data, D/A conversion is not required on the side of a panel 1, correspondingly achieving the reduction in size and power consumption. Meanwhile, the panel 1 is configured with an active-matrix LCD section 2, a scanning line driver 3, a digital data driver 4, a frame memory section 5, a memory controller 6 and a timing controller 7. The active-matrix LCD section 2 corresponds to a display drive section in the present invention.

[0070] Fig. 2 is a figure representative in detail of the panel 1. The active-matrix LCD section 2 is a part for actual display by use of active elements of TFTs, diodes or the like. The active-matrix LCD section 2 is arrayed with pixels in the number of  $i \times j$ . Because the present embodiment assumes a color display, three dots (termed also as sub-pixels) of R (Red), G(green) and B(Blue) as light-source colors are constituted as one pixel. For a monochromatic display, the pixel equals to the dot. The dot areas include data lines, scanning lines and active elements (e.g. switching elements by transistors, diodes or the like) arranged corresponding to the intersections of them. The active elements respectively have pixel electrodes to form a capacitance through a liquid crystal to a counter electrode. The voltage applied between the pixel electrode and the counter electrode controls the optical rotatory power due to liquid-crystal molecules, making display control on each dot. Moreover, even if the active element turns off the switch, the pixel electrode can sustain its displaying state owing to the storage charge before refreshing (display data rewriting) in the next time. The switch operation to the active elements and control of the charge supply to the pixel electrodes are implemented by driving a data line and scanning line (supplying current).

[0071] It is a scanning line driver 3 that controls to drive a scanning line. The scanning line driver 3 is formed by a row decoder 31 and a scanning line drive buffer 32. The row decoder 31 selects a scanning line to be driven on the basis of address

data inputted. The scanning line drive buffer 32 actually drives the scanning line selected by a column decoder 31.

[0072] Meanwhile, it is a digital data driver 4 that controls to drive a data line. The digital data driver 4 is formed by a k-bit DAC section 41 as a D/A converter.

5 Herein, a frame memory section 5 will be explained before explaining the operation of the k-bit DAC section 41.

[0073] The frame memory section 5 is configured by a column decoder 51, an input control circuit 52, a column selection switch section 53, a memory row decoder 54, a word driver 55, a memory cell section 56 and a sense amplifier section 57. The column decoder 51 selects one pixel out of one row (line) of pixels (in the number of j) on the basis of input address data. This ultimately results in selection of a to-be-driven data line. The input control circuit 52 is a circuit to control an image signal ( $k \times 3$ ) in one-pixel amount transmitted in parallel from the memory controller 6. The column selection switch section 53 is provided in the number of pixels on one line (i.e.  $k \times 3 \times j$ ) with reference to one-pixel image signal ( $k \times 3$ ) as a unit. Each column selection switch performs switching on the basis of column decoder 51 selection and image signal, driving a bit line. Herein, the input control circuit 52 and column selection switch section 53 is arranged on a side opposite to the active-matrix LCD section 2 while sandwiching the memory cell section 56. This reduces interconnection crossing over, thus achieving simplification and consumption-power reduction. Moreover, by the operation of the input control circuit 52 and column selection switch section 53, no noise will be interposed over the analog-driven LCD 2. Thus, noise reduction in display can be achieved.

[0074] The memory row decoder 54 selects a word line on the basis of input address data, in order to store to a desired memory cell of the memory cell section 56 forming the memory array, as described later. The word driver 55 actually drives a word line selected by the memory row decoder 54. Consequently, the image signal is stored as the pixel display data to the memory cells in the number of  $k \times 3$  that are connected to the word line selected by the memory row decoder 54 and corresponding to the pixels selected by the column decoder 51.

[0075] Meanwhile, the memory cell section 56 has memory cells in the number of  $k \times 3 \times i \times j$  to constitute a memory array of i-lines  $\times k \times 3 \times j$ -columns. This number of memory cells is the number required for each dot of R, G or B of the

display having a screen of  $i \times j$  pixels to make display with brightness in a tonal level of  $2k$ . In Fig. 2,  $k = 3$  is given to enable setting with eight tonal-levels of brightness. This number of memory cells is the number of memory cells required, at least, to store an image signal in amount of one screen. For example, in some circuits, a circuit configuration is given with redundant memory cells for the necessity of securing operation stability.

[0076] Herein, space saving will be achieved to a greater extent as the size of the glass substrate become equal to the size of the active-matrix LCD section 2 as an actual display part. That is, if the memory cells are arranged such that the length of the memory cell section 56 in the row direction is equal to or smaller than the length of the active-matrix LCD section 2 in the row direction, the memory cells in one column can be arranged most efficiently with a saved space width. Consequently, because the length of memory-cell arrangement in the row direction required to control 1-dot display is equal to or smaller than a pitch of dots, the length of the entire frame memory section 5 in the row direction is given equal to or smaller than the length of the active-matrix LCD section 2 in the row direction. Accordingly, design is made in Fig. 2 such that the length in the row direction of  $k$ -bit memory cell arrangement equals to each pitch of dots. Each sense amplifier (or selection switch) of the sense amplifier section 57 and each  $k$ -bit DAC of the  $k$ -bit DAC section 41 are also designed based upon each pitch of dots.

[0077] Also, the number of rows of the memory array is made equal to the number of scanning lines  $j$  so that the memory frame section 5 can store display data in amount of 1 screen. Consequently, it is possible to carry out storage with correspondence between a display-positioned pixel and a memory cell provided on a dot-by-dot basis. In order to achieve only space saving, it is satisfactory to have at least one row of memory cells without the especial necessity of constituting a memory array having the number of rows equal to the number of scanning lines. However, in order to reduce the data transmission amount over the system overall and low power consumption, memory cells are required in amount enough to store display data in amount of 1 screen with correspondence. Accordingly, an image signal in amount of display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU 110A. If no rewriting is made, the digital data driver 4 satisfactorily deals with the image-signal data stored in the memory cell section 56 as it is.



**[0078]** Each sense amplifier constituting the sense amplifier section 57 is connected on column (bit line)-by-column basis. Herein, the use of the sense amplifier is for the case each memory cell of the memory cell section 56 is configured by a dynamic memory. In the case of configuration with a static memory, selection switches are used in configuration instead of sense amplifiers.

**[0079]** The k-bit DAC section 41 constituting the digital data driver 4 is configured by k-bit DACs in the number of  $3 \times j$ . Each k-bit DAC is inputted with digital data based on the image signal stored on certain memory cells in the number of k through the bit lines in the number of k. The k-bit DAC converts the data-based value into a tonal level, depending upon which tonal level a data line is driven. In the LCD, alternating-current drive is required for the purpose of extending the life of liquid crystal. Accordingly, digital data cannot be used as it is but must be analog-converted. In this manner, display control is made, on the basis of display data, on the dot at an intersection of a driven scanning line and a data line.

**[0080]** Herein, the digital data driver 4 and the frame memory section 5 of the invention are directly coupled (integrated) to drive-operate the data line by the direct use of stored digital data. Accordingly, for convenience (in relation to Fig. 1), the digital data driver 4 is configured by the k-bit DAC section 41, and the frame memory section 5 is configured by the column decoder 51, the input control circuit 52, the column selection switch section 53, the memory row decoder 54, the word driver 55, the memory cell section 56 and the sense amplifier section 57. However, actually such distinction cannot be exactly made if considering the operational relationship between the digital data driver and the frame memory in the conventional use.

**[0081]** The memory controller 6 controls as  $k \times 3$  image signals in order to store the display data transmitted from the CPU 110A into the frame memory section 5. Also, the timing controller 7 has at least an address buffer 71 and transmit an address signal to the row decoder 31, column decoder 51 and memory row decoder 54 in order to store or display the display data transmitted from the CPU 110A.

**[0082]** In the case of configuring the memory by chips or the like, it is problematic in what way fine provision can be made within the chip and layout be given by taking interconnection, etc into consideration. Where the peripheral circuit such as the memory on a glass substrate, conception differs from that. It is the active-matrix LCD section 2 as an actual display part that occupies over the greatest area on

the glass substrate. Moreover, the pitch of pixels (ultimately the entire size) is fixed. Consequently, it is the problem that the system, such as peripheral circuits, is laid out with efficiency in accordance with the size. Although the memory cells can be lessened if considering space saving without considering consumption power, the reduction of consumption power requires memory cells for storing data in amount of one screen. Therefore, the present embodiment aims at presenting the most efficient layout on the basis of establishing a peripheral circuit in order for reducing consumption power.

**[0083]** Next, explanation will be made on the operation of display on the basis of Fig. 2. The CPU 110A transmits display data where to provide change in display. Consequently, where the image does not change, no display data is transmitted. When changing the display, an address signal is transmitted representative of a point (pixel) to be changed in display. Also, a display-data image signal is transmitted. Herein, the frame memory section 5 is provided with word lines corresponding in the number to scanning lines, to enable to store display data (image signal) in amount of one screen corresponding to the respective dots. Moreover, the row decoder 31 and the memory row decoder 54 are provided to enable selection of a scanning line and word line. Accordingly, a scanning line can be selected and driven randomly according to an address signal without requiring sequential scanning, which is convenient for rewriting display data as required. Also, in order to achieve space saving by simplifying the interconnections and reducing the circuit area, the same address signal is inputted to the row decoder 31 and the memory row decoder 54, respectively causing the corresponding sections to store and display in the same timing. As for the column decoder 51, random pixel selection can be made according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line.

**[0084]** In the case of not providing change in display, the digital data of the image signal stored in the frame memory section 5 is used as it is for making display, wherein no data transmission and reception is made to and from the CPU 110A. However, because the LCD requires alternating-current drive, there is a need of drive using pixel-inversion drive while refreshing at least at a required minimum frequency. This control is made with the scanning line driver 3 and the digital data driver 4. If the frequency is lowered, consumption-power reduction can be made but flicker

occurs due to punch-through voltage or the like. Therefore, in order to make flicker not conspicuous while reducing power consumption, the state of display is maintained with refreshing at a frequency, for example, of 30 Hz for still images (liquid crystal driven at 15 Hz).

5           **[0085]** As concerned with the frame memory section 5, if the memory cells are constituted by static memories, there is no need to rewrite data (refresh). However, if constituted by dynamic memories, there is a necessity of refreshing in such timing as can hold the storage.

10           **[0086]** As above, according to the first embodiment, where a system including not only a display part but also peripheral circuit on a substrate as in SOP is integrally formed on a substrate, in the memory cell section 56 of the frame memory section 5, memory cells are formed to be arranged such that the length in the row direction of arrangement of memory cells with an amount required for controlling one-dot display is equal to or smaller than a pitch of dots, i.e., the length in the row direction of the memory cell section 56 is equal to or smaller than the length in the row direction of the active-matrix LCD section 2. Accordingly, it is possible to arrange memory cells in amount of one row with saved space width.

15           **[0087]** Also, this is similarly made for the sense amplifier section 57 and k-bit DAC section 41, achieving space saving.

20           **[0088]** Also, the number of rows of the memory array is given the same as the number of scanning lines (i) to enable the frame memory section 5 to store display data (image signal) in amount of one screen. Accordingly, it is possible to store data in amount of one screen with correspondence between the pixel in each position and the memory cell of the memory cell section 56. The image signal only in amount of display data for a to-be-rewritten pixel is satisfactorily transmitted from the CPU 110A. Accordingly, the data transmission amount over the entire system can be decreased, and space-saved forming can be made with the maximum efficiency while achieving the reduction of power consumption.

25           **[0089]** Also, because the row decoder 31 and the memory row decoder 54 are provided to enable selection of a scanning line and word line to be driven on the basis of an address signal, a scanning line can be selected and driven randomly according to an address signal without the necessity of sequential scanning. This is convenient for rewriting display data as required.

30

[0090] Also, because the same address signal is inputted to the row decoder 31 and the memory row decoder 54 to cause the respective corresponding points to perform storage and display in the same timing, space saving can be made due to simplification of interconnections and reduction of circuit area.

5 [0091] Also, because the row decoder 51 can randomly select a pixel according to an address signal, random writing can be made without the necessity of sequential writing to the pixels (dots) on the same scanning line. This is convenient for rewriting display data as required.

10 [0092] Also, because the input control circuit 52 and the column selection switch section 53 are arranged on a side opposite to the active-matrix LCD section 2 sandwiching the memory cell section 56, crossover of interconnections is decreased thus achieving simplicity and consumption-power reduction. Moreover, there occurs no noise superposition over the analog-driven LCD 2 due to operation of the input control circuit 52 and column selection switch section 53, thus reducing noise in display.

15 [0093] Furthermore, because the memory controller 6 and the timing controller 7 are integrally formed on the panel 1, the panel 1 can be directly coupled to the CPU 110A, thus providing cost reduction, reliability and space saving for the system entirety.

## 20 Embodiment 2

[0094] Fig. 3 is a figure showing in detail a panel 1A according to a second embodiment of the invention. The panel 1A of Fig. 3 differs from the panel 1 of Fig. 2 in that address signals are independently inputted to the row decoder 31 and the memory row decoder 54. Due to this, it is possible to make the timing of storage different from the timing of display operations. The drive frequency is higher than that of storage and display operations in simultaneous timing. However, various forms of driving is feasible, e.g., address data is transmitted to the memory row decoder 54 in certain timing to make storage operation, and then address data is transmitted to the row decoder 31 in the next timing to make display.

30 [0095] As above, according to the second embodiment, because address signals are independently inputted respectively to the row decoder 31 and the memory row decoder 54, it is possible to enhance the freedom for selecting a drive method.

## Embodiment 3

[0096] Fig. 4 is a figure showing in detail a panel 1B according to a third embodiment of the invention. The panel 1B of Fig. 4 differs from the panel 1 of Fig. 2 in that a scanning line-select-control signal line and a word line-select-control signal line are respectively laid from the address buffer 71 to the row decoder 31A and the memory row decoder 54A, to transmit a scanning line-select-control signal and a word-line-select-control signal. The same address signal is inputted to the row decoder 31A and the memory row decoder 54A. However, the row decoder 31A is allowed to select a scanning line only during the period that a scanning line-select-control signal is on. Also, the memory row decoder 54A similarly is allowed to select a word line only during the period that a word-line-select-control signal is on. Consequently, storage and display operations can be made in different timing depending upon control of on-off of these signals.

[0097] As above, according to the third embodiment, the scanning line-select period of the row decoder 31A is limited on the basis of the scanning line-select-control signal and the word-line-select period of the memory row decoder 54A is limited on the basis of the word-line-select-control signal. Therefore, it is possible to enhance the freedom for selecting a drive method for storage and display operations. Accordingly, various ones of drive control are feasible depending on the method.

#### Embodiment 4

[0098] Fig. 5 is a figure representing in detail a panel 1C according to a fourth embodiment of the invention. The panel 1C of Fig. 5 differs from the panel 1B of Fig. 4 in that a column selection switch section 53A, a sense amplifier section 57A and memory cell section 56A are laid out taking into account a case such as  $k = 6$ . Also, the column decoder 51A and the input control circuit 52A respectively deal with signals in two times due to  $k = 6$ , as compared to the column decoder 51 and the input control circuit 52 (besides this, different from the panel 1 of Fig. 2 in that there are a scanning line-select-control signal line and a word-line-select-control signal line). As described before, if the memory cells are arranged such that the length in the row direction of the memory cell section 56 is equal to or smaller than the length in the row direction of the active-matrix LCD section 2, then the memory cells in one column can be arranged most efficiently with a saved space width. Accordingly, it is ideal to arrange the memory cells in amount of  $k$  bits in the row direction to have a

length equal to or smaller than the pitch of dots. However, if increasing the tonal level, the value of k increases (64 tonal levels at  $k = 6$ , display possible in about 260 thousand colors). That is, there is an increase in the number of memory cells to store 1-dot data. Due to this, it is to be considered that the arrangement of memory cells in amount of k bits as they are will exceeds the pitch of dots. Accordingly, the present embodiment has a memory array in a multi-stage configuration in the memory cell section 56A, wherein the memory cells are laid out and integrally formed to have such an arrangement that the length in the row direction of the memory cell section 56A is equal to or smaller than the length in the row direction of the active-matrix LCD section 2.

**[0099]** Meanwhile, it is to be considered as another way of thinking that the number of memory-array rows is provided integer times the number of scanning lines to constitute a 1-dot memory cells in a plurality of rows. In this case, the k-bit DAC section 41 time-division-processes digital data to drive the data line.

**[0100]** As above, according to the fourth embodiment, where the length of arrangement of k-bit memory cells in the row direction cannot be given equal to or smaller than the pitch of dots, the memory array is made in a multi-stage configuration to have layout and integral formation such that the length in the row direction of the memory cell section 56A equal to or is smaller than the length in the row direction of the active-matrix LCD section 2. Accordingly, it is possible to facilitate interconnections between the memory cell section 56A and the k-bit DAC section 41. Thus, space saving can be achieved.

#### Embodiment 5

**[0101]** Fig. 6 is a figure representing in detail a panel 1D according to a fifth embodiment of the invention. The panel 1D of Fig. 6 differs from the panel 1B of Fig. 4 in arrangement of memory cells in the memory cell section 56B, and in that the image signals for two pixels are simultaneously inputted so that the column decoder 51B can select two pixels simultaneously. Furthermore, the input control circuit 52A and the column selection switch section 53A respectively deal with signals in two times as compared to the input control circuit 52 and the column selection switch section 53A.

**[0102]** The fourth embodiment explained on the case that the length of arrangement of memory cells in amount of k bits is longer than the pitch of pixels.

Conversely, the length of arrangement of memory cells in amount of plurality of pixels (dots) is equal to or smaller than the pitch of one pixel (dot), it is possible to further save the space by laying out and integrally forming the memory cells in amount of a plurality of pixels (dots) arranged corresponding to the one-pixel (dot) pitch. However, in this case, the same number of word lines as the scanning lines are provided to provide memory cells corresponding to the dots without sharing the word lines. It is noted that in this case the sense amplifier section 57 can be shared.

[0103] Also, in the first to fourth embodiments the row decoder 51 was configured to select one pixel, as in Fig. 2 to Fig. 5. However, the present invention is not limited to this but may be made to select integer-times simultaneously. In this case, the image signal is inputted in proportion to the multiple.

[0104] As above, according to the fifth embodiment, where the length of arrangement with memory cells in amount of plurality of pixels (dots) is equal to or smaller than the length of one-pixel (dot) pitch, the memory cells in amount of plurality of pixels (dots) are laid out and integrally formed by arrangement corresponding to the one-pixel pitch. Accordingly, space saving can be further achieved. Moreover, the sense amplifier section 57 can be shared. Also, because the column decoder 511 can select two pixels simultaneously, the drive frequency can be lowered and power-consumption reduction be achieved despite interconnection is complicate. Also, sufficient operation is obtained even if driven by the active elements inferior in characteristic to the single-crystal FETs.

#### Embodiment 6

[0105] Fig. 7 is a figure representing in detail a panel 1E according to a sixth embodiment of the invention. The panel 1E of Fig. 7 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix OEL section 8 as a display drive section and in that the k-bit DAC section 41 is not used.

[0106] OEL (organic Electro Luminescent) means an organic EL element. This OEL element is a spontaneous luminescent device different from liquid crystal. Consequently, the device has the following features and is expected in the display field and other fields.

- (1) wide view angle
- (2) reduction of weight and thickness feasible

- (3) high contrast ratio
- (4) low power consumption (back light not required)
- (5) multi-color feasible due to molecular design
- (6) high-definition display feasible owing to current drive

5       **[0107]** Fig. 8 is a figure showing a circuit arrangement of an active-matrix  
OEL section 8. Fig. 8 shows an arrangement with two pixels. As described before,  
LCD requires alternating-current drive for the purpose of extending the life of liquid  
crystal. Consequently, analog conversion is generally implemented without using  
digital data as it is. Where making OEL luminous, usually digital data is analog-  
10 converted, e.g. two transistor scheme is used to hold the converted analog signal  
(data) on a capacitance or the like. The output current of the transistor is controlled  
with the converted analog data to control the luminescence of OEL. It is noted that  
OEL is driven on direct current (DC drive). On the other hand, as shown in Fig. 8, it  
is possible to deal with digital data such as an image signal, as it is, stored on each  
15 memory.

**[0108]** Next, explanation will be made on a method for displaying display  
data stored on the frame memory by exemplifying the dot of R1 (R of a pixel on the  
first column). R1 is provided with seven OEL elements to display eight tone levels.  
The seven OEL elements are grouped with one OEL element, two OEL elements and  
20 four OEL elements respectively, connected to R1S, R1T and R1U corresponding to  
each bit line. The difference in tonal level is expressed by luminescent area.  
Accordingly, at tonal level 0, R1S, R1T and R1U are not driven not to emit any of the  
elements. At tonal level 1, R1S is driven to make one OEL element luminous.  
Similarly, at tonal level 2, R1T is driven to make two OEL elements luminous, and at  
25 tonal level 3, R1S and R1T are driven to make three OEL elements luminous. Tonal  
level is represented by the combination of them. This is true for the dots of G and B.

**[0109]** Herein, OEL may be DC driven, and refresh due to inversion drive is  
usually unnecessary where change in displaying is not required. It is noted that a  
dynamic circuit is used in Fig. 8. Accordingly, even if there is no change in  
30 displaying, there is need to maintain displaying by refreshing at a constant time  
interval on the basis of the data stored in each memory cell in the frame memory  
section 5.



[0110] Although Fig. 7 describes corresponding to Fig. 2 as the first embodiment, it is needless to say that the active-matrix OEL section 8 is applicable to the display devices employing the respective panels of the second to fifth embodiments.

5 [0111] Also, although the sixth embodiment shows the example to implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the OEL elements in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

10 [0112] As above, according to the sixth embodiment, because OEL element as spontaneous luminescent device is used for display, it is possible not only to obtain the effects of the first to fifth embodiments but also to reduce power consumption and weight due to unnecessary of back light. Moreover, because tonal representation is feasible by using the digital data to be stored in the frame memory section 5, as it is, without analog conversion, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

15 Embodiment 7

20 [0113] Fig. 9 is a figure representing in detail a panel 1F according to a seventh embodiment of the invention. The panel 1F of Fig. 9 differs from the panel 1E of Fig. 7 in that the section for actual display is made as an active-matrix LCD section 2A as a display drive section.

25 [0114] Incidentally, the panel 1F of Fig. 9 differs from the panel 1 of Fig. 2 in that the section for actual display is made as a digital-compatible active-matrix LCD section 2A and in that the k-bit DAC section 41 is not employed.

30 [0115] Fig. 10 is a figure showing a circuit arrangement of the active-matrix LCD section 2A. Fig. 10 shows an arrangement with two pixels. As described before, because LCD requires alternate-current drive for the purpose of extending the life of liquid crystal, analog conversion is generally made without using digital data as it is. The configuration of Fig. 10 is made to deal with digital data such as the image signal stored on each memory cell, as it is, as hereinafter described.

[0116] Next, a method for displaying the display data stored in the frame memory will be explained by exemplifying the dot of R1 (R on the first column pixel). R1 has three liquid crystal regions respectively covered with independent pixel electrodes in order to represent eight tonal levels. The three liquid crystal regions are in area ratio of 1:2:4 and connected to R1S, R1T and R1U corresponding to each bit line. Meanwhile, the region of the active-matrix LCD section 2A other than the liquid crystal regions, i.e. the entire region excepting the pixel electrodes, are shaded. Accordingly, the difference of tonal level is represented as an area of the liquid crystal region in a transmissive state. Hence, at tonal level 0, R1S, R1T and R1U are not driven to make every liquid crystal region in a shade state. At tonal level 1, R1S is driven to make the liquid crystal region of the area ratio 1 in a transmissive state. Similarly, at tonal level 2, R1T is driven to make the liquid crystal region of the area ratio 2 in a transmissive state, and at tonal level 3, R1S and R1T are driven to make the liquid crystal regions of the area ratio 1 and area ratio 2 in a transmissive state. Tonal level is represented by this combination. This is true for the dots of G and B.

[0117] In this embodiment, a rectangular wave is supplied to the common feed line VLC to apply voltage to each liquid crystal region. The voltage of the rectangular wave to be supplied to the common feed line VLC is a voltage that positive and negative potentials can completely raise the liquid crystal. Also, the frequency of the rectangular wave is the same as the frequency of an alternating-current drive in the usual liquid crystal display device. This realizes a digital-compatible active-matrix LCD section 2A.

[0118] Incidentally, because Fig. 10 of the present embodiment uses a dynamic circuit similarly to Fig. 8 of the sixth embodiment, there is a need to sustain displaying by refreshing at a constant time interval on the basis of the data stored on each memory cell of the frame memory section 5.

[0119] Although Fig. 9 describes corresponding to Fig. 2 as the first embodiment, it is needless to say that the digital-compatible active-matrix LCD section 2A is applicable to the display devices employing the respective panels of the second to fifth embodiments.

[0120] Although the seventh embodiment explained the arrangements or the like on the assumption of the transmissive type LCD, the similar idea is applicable even in a reflective type LCD. In a reflective type LCD, because the devices can be

arranged at an underside of the pixel electrodes, more complicated circuit will be feasible and advantageous for achieving multi-bit.

[0121] Also, although the seventh embodiment shows the example to implement digital drive due to so-called area tonal level, it may be, for example, in an arrangement to make digital drive by time-division drive or an arrangement to make digital drive by the combination of area tonal level and time-division drive. In order to provide time-division drive, on-off signals may be applied, in synchronism with a timing signal repeated with a constant period, to the liquid crystal in periods different on a bit-by-bit basis corresponding to the digital signal on each bit of each pixel.

[0122] As above, according to the seventh embodiment, because the digital data to be stored in the frame memory section 5 can be used as it is without analog conversion to provide tonal representation, there is no need to use such a circuit as DAC. The peripheral circuit can be saved in space and reduced in power consumption.

#### Embodiment 8

[0123] Incidentally, although the above embodiments explained on the assumption of the color display, the present invention can cope with a monochromatic display.

#### INDUSTRIAL APPLICABILITY

[0124] As above, according to the inventions of claims 1 and 2, where integral formation is made using TFTs including a peripheral circuit for example on polysilicon, memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section were allocated corresponding to a length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver and memory cell section allocated to have a row length smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

[0125] Also, according to the inventions of claims 3 and 4, where a display drive circuit for display control using, for example, an organic EL element is integrally formed including a peripheral circuit on polysilicon, memory cells in the number capable of storing an image signal for performing display control of dots in at

least one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section, column selection switch section and data line driver section (e.g. the column decoder section, column selection switch section, data line driver section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width.

[0126] Also, according to the inventions of claims 5 and 6, where a display drive circuit for display control using a liquid crystal is integrally formed including a peripheral circuit, for example, on polysilicon, the memory cells in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding the length in the row direction of the display drive section, beside the column decoder section and column section switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, because the organic EL elements are DC-driven, an image signal of a digital signal can be directly used, eliminating the necessity of providing such a circuit as DAC, for example.

[0127] Also, according to the inventions of claims 7 and 8, where a display drive circuit for display control using an organic EL element is integrally formed including a peripheral circuit for example on polysilicon, the memory cells of the memory cell section in the number capable of storing an image signal for display control of at least the dots on one row of the display drive section are allocated corresponding to the length in the row direction of the display drive section, besides the column decoder section and column selection switch section (e.g. the column decoder section, column selection switch section and memory cell section are allocated to have a length in the row direction thereof equal to or smaller than the length in the row direction of the display drive section). Accordingly, the memory cells in one row can be efficiently arranged in a space-saved width. Also, the organic EL element is DC-driven, an image signal of a digital signal can be directly used, thus eliminating the necessity of using such a circuit as DAC, for example.

[0128] Also, according to the invention of claim 9, even if structuring redundantly in the number of the memory cells in the number capable of storing the image signal for display control of the dots on one row of the display drive section, they are allocated on the basis of the length in the row direction of the display section (e.g. to have a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, the space-saved width can be achieved with efficiency.

[0129] Also, according to the invention of claim 10, a word line driver section for selecting and driving the word lines provided in the number equal to the scanning lines is further integrated on and formed integrally with the substrate, and the memory cell section is structured by a memory array corresponding to the dot arrangement of the display drive section, to store an image signal required for display over one screen. Accordingly, external exchange of data amount is decreased, achieving reduction in power consumption.

[0130] Also, according to the invention of claim 11, the scanning line driver section and word line driver section is made to select a scanning line and word line to be driven on the basis of an address signal. Accordingly, no sequential scanning is required, and random selection and drive of the scanning line can be made in accordance with the address signal. This is convenient in rewriting display data as required.

[0131] Also, according to the invention of claim 12, because the same lines are shared in the scanning line driver section and the word line driver section, it is possible to achieve space saving due to simplification of interconnections and reduction in circuit area.

[0132] Also, according to the invention of claim 13, because independent address signals are inputted to the scanning line driver section and the word line driver section, it is possible to enhance the freedom in storage and display operations.

[0133] Also, according to the invention of claim 14, scanning line driver section operates to select and drive the scanning line on the basis of the address signal only when a scanning line driver control signal is inputted and the word line driver section operates to select and drive the word line on the basis of the address signal only when a word line driver control signal is inputted. Accordingly, it is possible to

enhance the freedom in selecting a driving way of storage and display operations. Due to this, a variety of drive control is feasible depending on the method.

[0134] Also, according to the invention of claim 15, the column decoder section is made to randomly select a memory cell to store an image signal due to the address signal. Accordingly, there is no need to write sequentially onto the dots on the same scanning line, and random writing can be made. This is convenient in rewriting display data as required.

[0135] Also, according to the invention of claim 16, image signals are inputted on one-pixel-unit basis, based on an input of which the column decoder section selects a memory cell in amount of one pixel as a display-change unit thus being convenient.

[0136] Also, according to the invention of claim 17, image signals are inputted on a plurality-of-pixel-unit basis, wherein the column decoder section selects a memory cell in amount of a plurality of pixels based on an input thereof. Accordingly, interconnections may be complicated but drive frequency can be decreased thus achieving reduction in power consumption. Also, sufficient operation is available if driving with the active element inferior in characteristic to single crystal FET.

[0137] Also, according to the invention of claim 18, the image-signal-input interconnection and column selection switch section are formed on a side opposite to the display drive section sandwiching the memory cell section. Accordingly, it is possible to achieve the reduction in power consumption by decreasing the crossover of interconnections and prevent superposition of noise on the display screen due to the effects of switching or the like.

[0138] Also, according to the invention of claim 19, a multi-stage structure is given in the structure and the formation. Accordingly, even where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section because, for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, the interconnections can be facilitated and space saving be achieved.

[0139] Also, according to the invention of claim 20, the structure is made by a plurality of rows. Accordingly, where the memory cell cannot be allocated corresponding to the length in the row direction of the display drive section because,

for example, of increase in the memory cell in amount of one dot due to increase in the number of tonal levels, it is possible to suppress the length in the row direction despite the length in the column direction broadens.

5 [0140] Also, according to the inventions of claims 21 and 22, where a plurality of rows of memory cells can be allocated corresponding to the length in the row direction of the display drive section, the memory cells in the number capable of storing an image signal for display control of a plurality of rows of dots of the display drive section are structured by a memory array allocated corresponding to the length in the row direction of the display drive section (e.g. the memory cells allocated to have  
10 a length in the row direction equal to or smaller than the length in the row direction of the display drive section). Accordingly, space saving is further achieved.

[0141] Also, according to the invention of claim 23, a timing controller section for controlling timing of transmitting the address signal and a memory controller section for controlling to transmit the image signal are further integrated on  
15 the substrate and integrally formed therewith, to systematically, integrally forming all the peripheral circuit required for display control on the same substrate. Accordingly, the system entirety can be made at low cost, reliable and space-saved.

[0142] Also, according to the invention of claim 24, a D/A converter is provided between the display drive section and the memory cell section to supply the  
20 image signal converted into an analog signal to the display drive section. Accordingly, display can be made by the display drive section compatible with analog signals.

[0143] Also, according to the inventions of claims 25 and 26, the display drive section and the memory cell section are directly coupled together to directly  
25 supply an image signal comprising a digital signal to the display drive section. Accordingly, display can be made by the display drive section compatible with digital signals, and consumption power be reduced.

## CLAIMS

1. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver section allocated corresponding to a length in a column direction of said display drive section, to select and drive said scanning lines;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in a row direction of said display drive section;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

a data line driver section allocated corresponding to the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

2. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to perform display control using a liquid crystal by driving said scanning lines and said data lines;

a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in a row direction of said display drive section, to select and drive said scanning lines;



a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section;

5 a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

10

a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

15

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

### 3. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL elements connected to said active elements by driving said scanning lines and said data lines to perform display control;

20

a scanning line driver section allocated corresponding to a length in a column direction of said display drive section, to select and drive said scanning lines;

25

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in the row direction of said display drive section;

30 a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

a column selection switch section allocated corresponding to the length in the row direction of said display drive section to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

5 a data line driver section allocated corresponding to the length in the row direction of said display drive section to drive said data lines on the basis of the image signal stored in said memory cell section, integrated on a semiconductor or an insulating substrate and integrally formed therewith.

4. A display device, comprising:

10 a display drive section having a plurality of scanning lines and a plurality of data lines formed in a grating form corresponding to dots as minimum units of display and active elements provided corresponding to intersections, to emit an organic EL element connected to said active elements by driving said scanning lines and said data lines to perform display control;

15 a scanning line driver section allocated to have a length in a column direction equal to or smaller than a length in the column direction of said display drive section, to select and drive said scanning lines;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section;

20

a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal;

25 a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section; and

30 a data line driver section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to drive said data lines on the basis of the image signal stored in said memory cell section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

5. A display device, comprising:

5 a display drive section having a plurality of scanning lines and a plurality of bit line, and a liquid crystal controlled in display by driving the corresponding said scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

10 a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of the display drive section and allocated corresponding to the length in the row direction of said display drive section;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, and to select and memory cells for storing an input image signal; and

15 a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cell selected by said column decoder section,

20 integrated on a semiconductor or insulating substrate and integrally formed therewith.

6. A display device, comprising:

25 a display drive section having a plurality of scanning lines and a plurality of bit lines, and a liquid crystal controlled in display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of display control, and formed in a matrix form;

30 a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section, and each of the memory cells being connected to each of the bit lines;

a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal; and

a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

7. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of said display drive section and allocated corresponding to the length in the row direction of said display drive section, and each of the memory cells being connected to each of the bit lines;

a column decoder section allocated corresponding to the length in the row direction of said display drive section, to select said memory cells storing an input image signal; and

a column selection switch section allocated corresponding to the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cell selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

8. A display device, comprising:

a display drive section having a plurality of scanning lines and a plurality of bit lines, and organic EL elements to be controlled in luminescent display by driving the corresponding scanning lines and bit lines and provided on a dot-by-dot basis as minimum units of control in display, and formed in a matrix form;

a memory cell section having memory cells that are in the number capable of storing an image signal for performing display control of dots in at least one row of

said display drive section and allocated to have a length in a row direction thereof equal to or smaller than the length in the row direction of said display drive section and each of the memory cells being connected each of the bit lines;

5 a column decoder section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to select said memory cells for storing an input image signal; and

10 a column selection switch section allocated to have a length in a row direction equal to or smaller than the length in the row direction of said display drive section, to switch on the basis of a selection by said column decoder section and the image signal and storing the image signal to said memory cells selected by said column decoder section,

integrated on a semiconductor or an insulating substrate and integrally formed therewith.

15 9. A display device as claimed in any one of claims 1 to 8, wherein the number of said memory cells, which is allocated corresponding to the length in the row direction of said display drive section and capable of storing the image signal for display control of the dots on one row of said display drive section, is structured redundantly.

20 10. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section connects said memory cells in the number capable of storing an image signal for display control of the one-row dots to each of word lines in the number equal to the number of said scanning lines and is structured with a memory array corresponding to dot arrangement of said display drive section, and

25 a word line driver section for selecting and driving said word lines are further integrated on and integrally formed with said substrate.

11. A display device as claimed in claim 10, wherein, on the basis of an address signal representative of a display position and a storage position, said scanning line driver section selects said scanning lines and said word line driver section selects said word lines.

30 12. A display device as claimed in claim 11, wherein the same address signal is inputted to said scanning line driver section and said word line driver section.

13. A display device as claimed in claim 11, wherein independent address signals are inputted to said scanning line driver section and said word line driver section.

5 14. A display device as claimed in claim 11, wherein said scanning line driver section operates to select and drive said scanning lines on the basis of the address signal only when a scanning line driver control signal is inputted, and said word line driver section operates to select and drive said word lines on the basis of the address signal only when a word line driver control signal is inputted.

10 15. A display device as claimed in claim 11, wherein said column decoder section selects the memory cell to store an inputted image signal on the basis of the address signal.

15 16. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of one-pixel, and said column decoder section selects the memory cell in an amount of one pixel.

20 17. A display device as claimed in claim 15, wherein one pixel comprises three dots provided for developing and displaying red, blue and green as light source colors, the image signal is inputted on the basis of a unit of a plurality of pixels, and said column decoder section selects the memory cell in an amount of a plurality of pixels.

18. A display device as claimed in any one of claims 1 to 8, wherein an input interconnection for the image signal to be stored in said memory cell and said column selection switch section are formed on a side opposite to said display drive section sandwiching said memory cell section therebetween.

25 19. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is allocated with the memory cell corresponding to the length in the row direction of said display drive section and formed in a multi-stage structure.

30 20. A display device as claimed in claim 10, wherein said word lines are provided in the number of integer times the number of the scanning lines, and said memory cell section is structured by a memory array connecting, by grouping, the memory cells in the number capable of storing the image signal for display control of the one-row dots of said display drive section to the word lines in the number of the integer times.

21. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated corresponding to the length  
5 in the row direction of said display drive section.

22. A display device as claimed in any one of claims 1 to 8, wherein said memory cell section is structured by a memory array having the memory cells that are in the number capable of storing the image signal for display control of a plurality of rows of the dots of said display drive section and allocated to have a length in the row  
10 direction equal to or smaller than the length in the row direction of said display drive section.

23. A display device as claimed in any one of claims 11 to 22, further comprising:

a timing controller section for controlling timing of transmitting the address  
15 signal, and

a memory controller section for controlling to transmit the image signal,  
integrated on a semiconductor or an insulating substrate and integrally formed  
therewith.

24. A display device as claimed in any one of claims 1 to 8, wherein a D/A  
20 converter is provided between said display drive section and said memory cell section for converting the image signal comprising a digital signal stored in the memory cell into an analog signal, followed by supplying to said display drive section.

25. A display device as claimed in any one of claims 1 to 8, wherein said display drive section and said memory cell section are directly coupled to supply the  
25 image signal comprising a digital signal stored in said memory cell section to said display drive section.

26. A display device as claimed in claim 25, wherein said display drive section performs digital drive through area tonal level, time-division tonal level or a combination thereof.

## FIG. 1

110 IMAGE SIGNAL SOURCE

1: PANEL

2 ACTIVE-MATRIX LCD SECTION

5 3 SCANNING LINE DRIVER

4 DIGITAL DATA DRIVER SECTION

5 FRAME MEMORY SECTION

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

10 FIG. 2

6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

15 51 COLUMN DECODER (j OUTPUT)

k×3 IMAGE SIGNAL

52 INPUT CONTROL CIRCUIT

53 COLUMN SELECT SWITCH SECTION

54 MEMORY ROW DECODER

20 55 WORD DRIVER (i OUTPUT)

56 MEMORY CELL SECTION

57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 k-BIT DAC SECTION

1 PIXEL

25 31 ROW DECODER

32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)

1: PANEL

## FIG. 3

30 6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER



	51 COLUMN DECODER (j OUTPUT)
	k×3 IMAGE SIGNAL
	52 INPUT CONTROL CIRCUIT
	53 COLUMN SELECT SWITCH SECTION
5	54 MEMORY ROW DECODER
	55 WORD DRIVER (i OUTPUT)
	56 MEMORY CELL SECTION
	57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)
	41 k-BIT DAC SECTION
10	1 PIXEL
	31 ROW DECODER
	32 SCANNING LINE DRIVE BUFFER (i OUTPUT)
	2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)
	1A: PANEL
15	FIG. 4
	6 MEMORY CONTROLLER
	7 TIMING CONTROLLER
	ADDRESS SIGNAL
	71 ADDRESS BUFFER
20	51 COLUMN DECODER (j OUTPUT)
	SCANNING LINE SELECTION CONTROL SIGNAL LINE
	WORD SELECTION CONTROL SIGNAL LINE
	k×3 IMAGE SIGNAL
	52 INPUT CONTROL CIRCUIT
25	53 COLUMN SELECT SWITCH SECTION
	54A MEMORY ROW DECODER
	55 WORD DRIVER (i OUTPUT)
	56 MEMORY CELL SECTION
	57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)
30	41 K-BIT DAC SECTION
	1 PIXEL
	31A ROW DECODER
	32 SCANNING LINE DRIVE BUFFER (i OUTPUT)

2: ACTIVE-MATRIX LCD SECTION ( $i \times j$  PIXELS)

1B: PANEL

FIG. 5

6 MEMORY CONTROLLER

5 7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51A COLUMN DECODER ( $j$  OUTPUT)

SCANNING LINE SELECTION CONTROL SIGNAL LINE

10 WORD SELECTION CONTROL SIGNAL LINE

$k \times 3$  IMAGE SIGNAL

52A INPUT CONTROL CIRCUIT

53A COLUMN SELECTION SWITCH SECTION

54A MEMORY ROW DECODER

15 55 WORD DRIVER ( $i$  OUTPUT)

56A MEMORY CELL SECTION

57A SENSE AMPLIFIER SECTION (SELECTION SWITCH)

41 K-BIT DAC SECTION

1 PIXEL

20 31A ROW DECODER

32 SCANNING LINE DRIVE BUFFER ( $i$  OUTPUT)

2: ACTIVE-MATRIX LCD SECTION ( $i \times j$  PIXELS)

1C: PANEL

FIG. 6

25 6 MEMORY CONTROLLER

7 TIMING CONTROLLER

ADDRESS SIGNAL

71 ADDRESS BUFFER

51B COLUMN DECODER ( $j$  OUTPUT)

30 SCANNING LINE SELECTION CONTROL SIGNAL LINE

WORD SELECTION CONTROL SIGNAL LINE

$k \times 2 \times 3$  IMAGE SIGNAL

52A INPUT CONTROL CIRCUIT

	53A COLUMN SELECTION SWITCH SECTION
	54A MEMORY ROW DECODER
	55 WORD DRIVER (i OUTPUT)
	56B MEMORY CELL SECTION
5	57A SENSE AMPLIFIER SECTION (SELECTION SWITCH)
	41 K-BIT DAC SECTION
	31A ROW DECODER
	32 SCANNING LINE DRIVE BUFFER (i OUTPUT)
	2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)
10	1D: PANEL
	FIG. 7
	6 MEMORY CONTROLLER
	7 TIMING CONTROLLER
	ADDRESS SIGNAL
15	71 ADDRESS BUFFER
	51 COLUMN DECODER (j OUTPUT)
	SCANNING LINE SELECTION CONTROL SIGNAL LINE
	WORD SELECTION CONTROL SIGNAL LINE
	k×3 IMAGE SIGNAL
20	52 INPUT CONTROL CIRCUIT
	53 COLUMN SELECTION SWITCH SECTION
	54 MEMORY ROW DECODER
	55 WORD DRIVER (i OUTPUT)
	56 MEMORY CELL SECTION
25	57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)
	31 ROW DECODER
	32 SCANNING LINE DRIVE BUFFER (i OUTPUT)
	8: ACTIVE-MATRIX OLED SECTION (i×j PIXELS)
	1E: PANEL
30	FIG. 8
	1 PIXEL
	FIG. 9
	6 MEMORY CONTROLLER

	7 TIMING CONTROLLER
	ADDRESS SIGNAL
	71 ADDRESS BUFFER
	51 COLUMN DECODER (j OUTPUT)
5	k×3 IMAGE SIGNAL
	52 INPUT CONTROL CIRCUIT
	53 COLUMN SELECTION SWITCH SECTION
	54 MEMORY ROW DECODER
	55 WORD DRIVER (i OUTPUT)
10	56 MEMORY CELL SECTION
	57 SENSE AMPLIFIER SECTION (SELECTION SWITCH)
	1 PIXEL
	31 ROW DECODER
	32 SCANNING LINE DRIVE BUFFER (i OUTPUT)
15	2: ACTIVE-MATRIX LCD SECTION (i×j PIXELS)
	1: PANEL
	FIG. 10
	1 PIXEL
	FIG. 11
20	100 IMAGE SIGNAL SOURCE
	100C FRAME MEMORY
	100D LCD CONTROLLER
	IMAGE SIGNAL
	101B DIGITAL DATA DRIVER
25	101C LIQUID CRYSTAL PANEL
	101A SCANNING LINE DRIVER
	TIMING DATA
	101 TFT LIQUID CRYSTAL DISPLAY PANEL

FIG.1


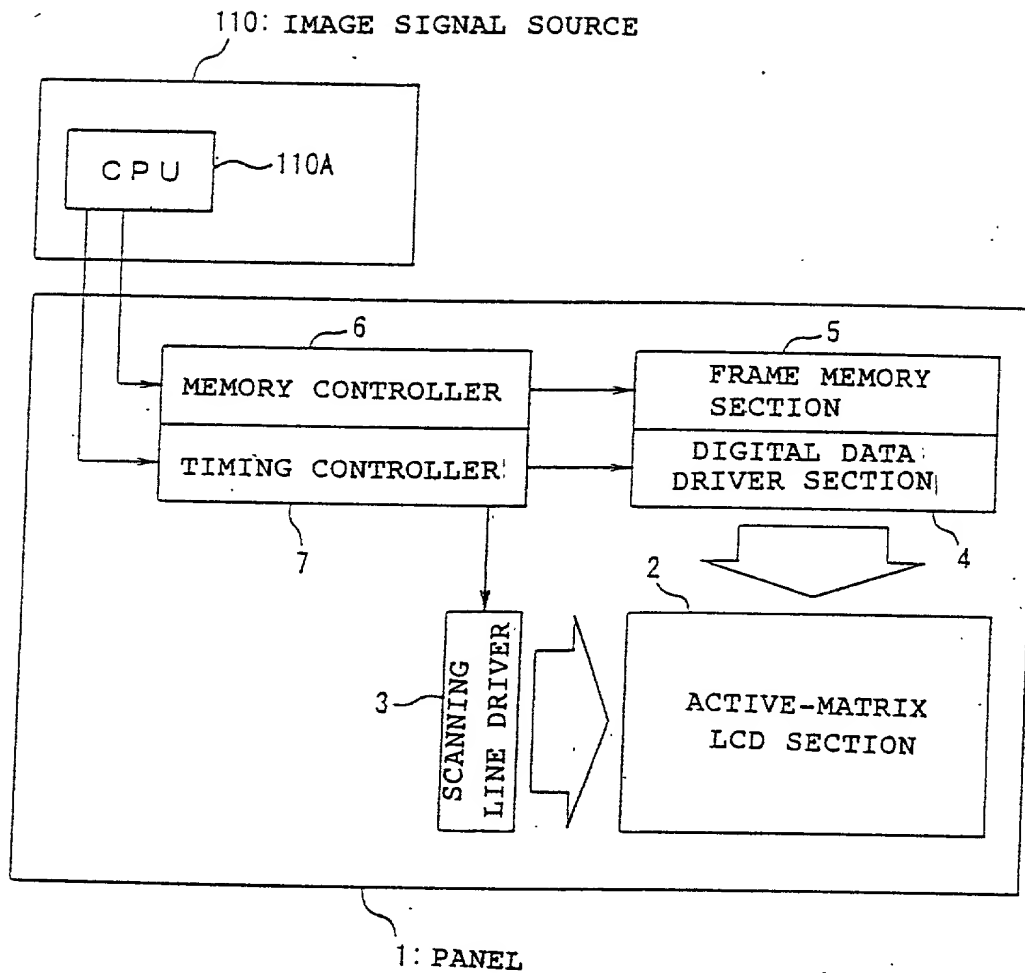


FIG.2




1A: PANEL



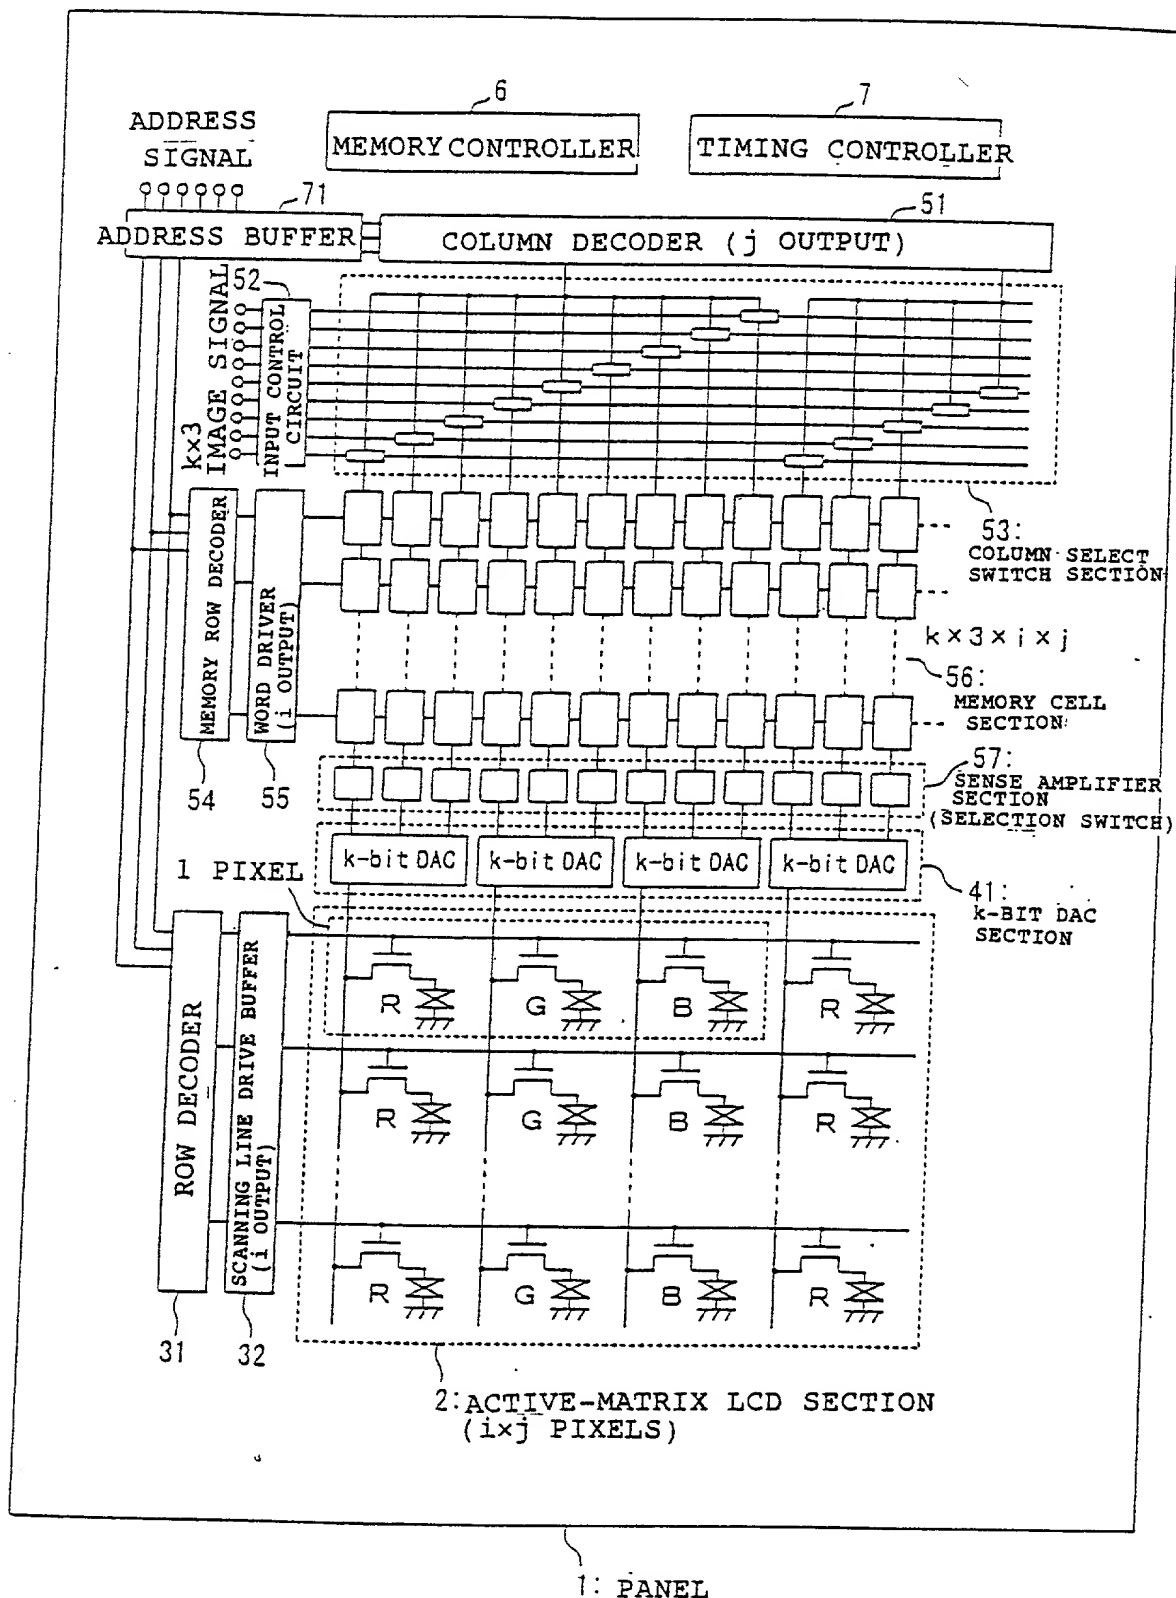


2



6/77

FIG. 7

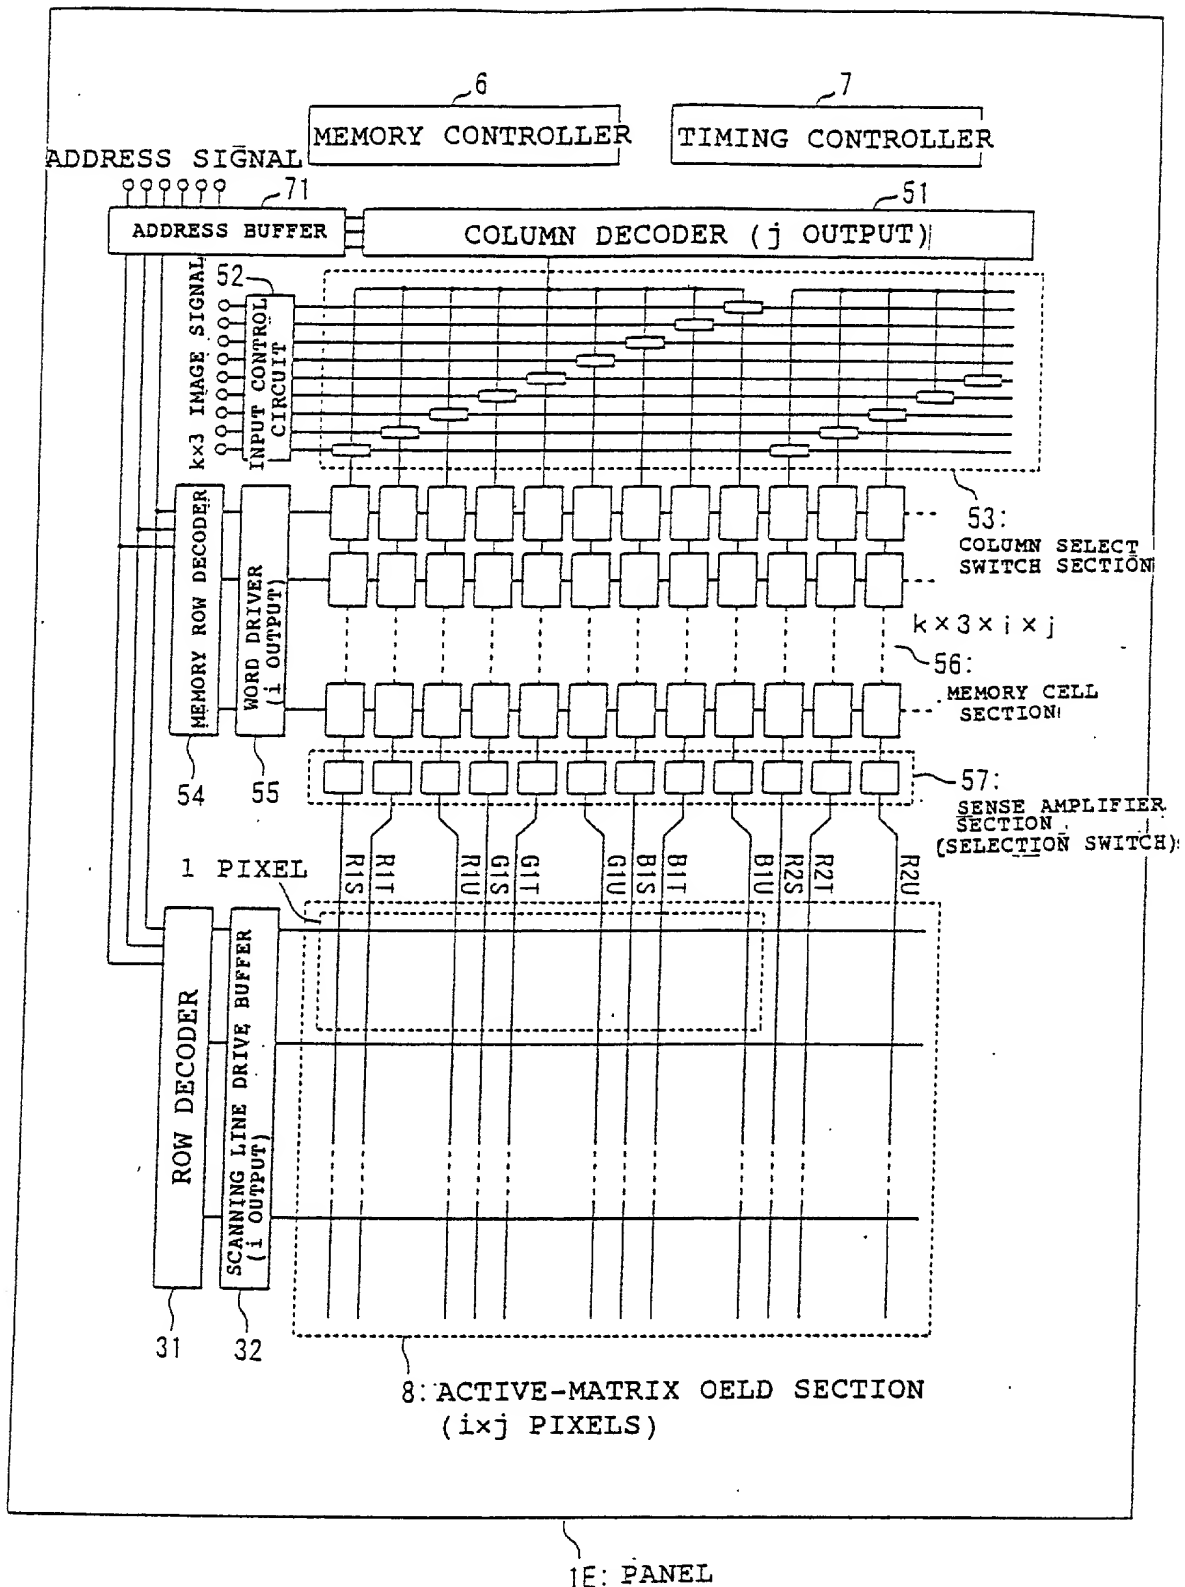

1E: PANEL

FIG. 8

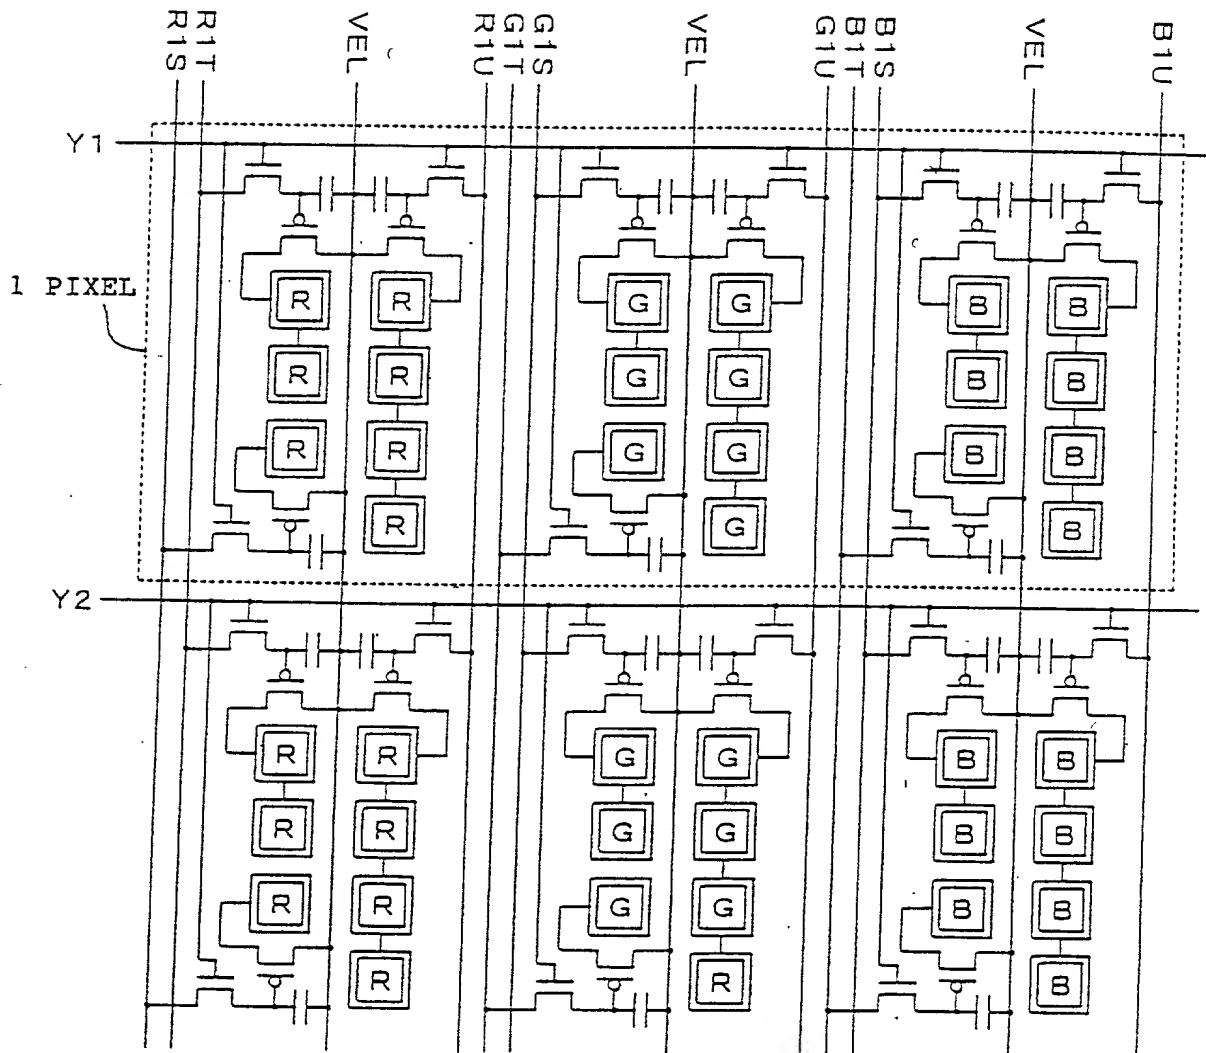


FIG.9

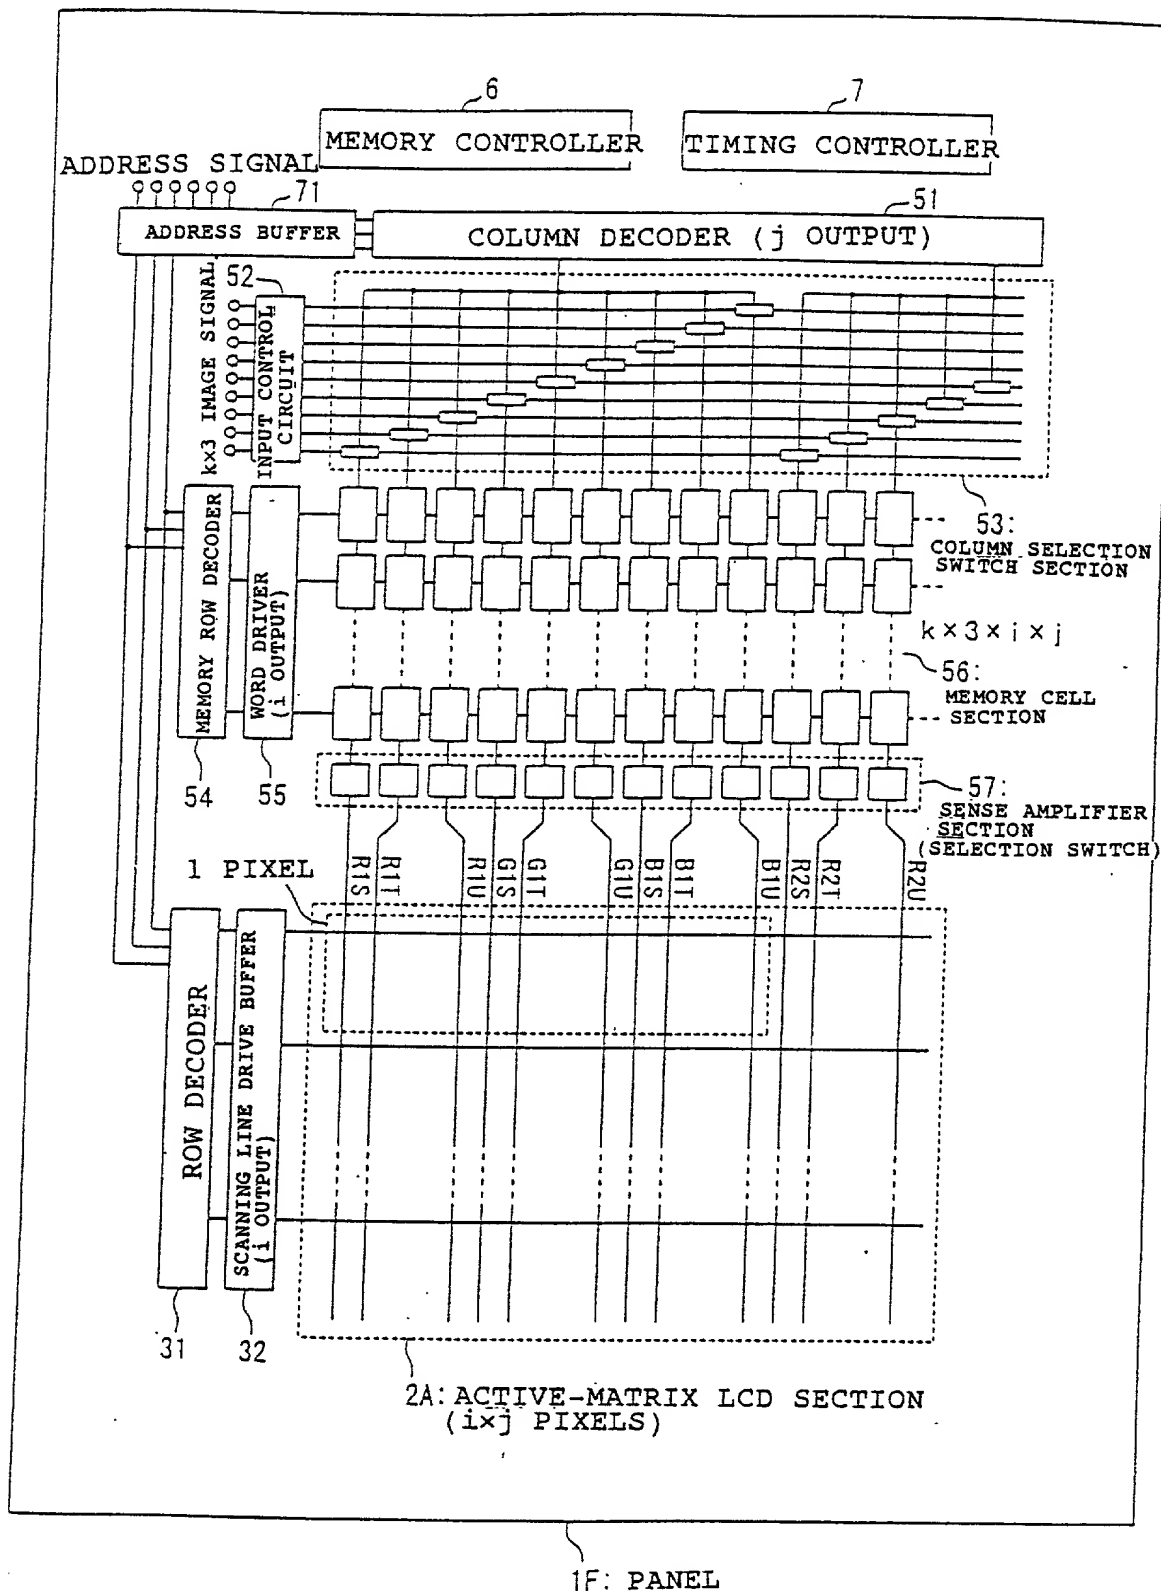


FIG.10


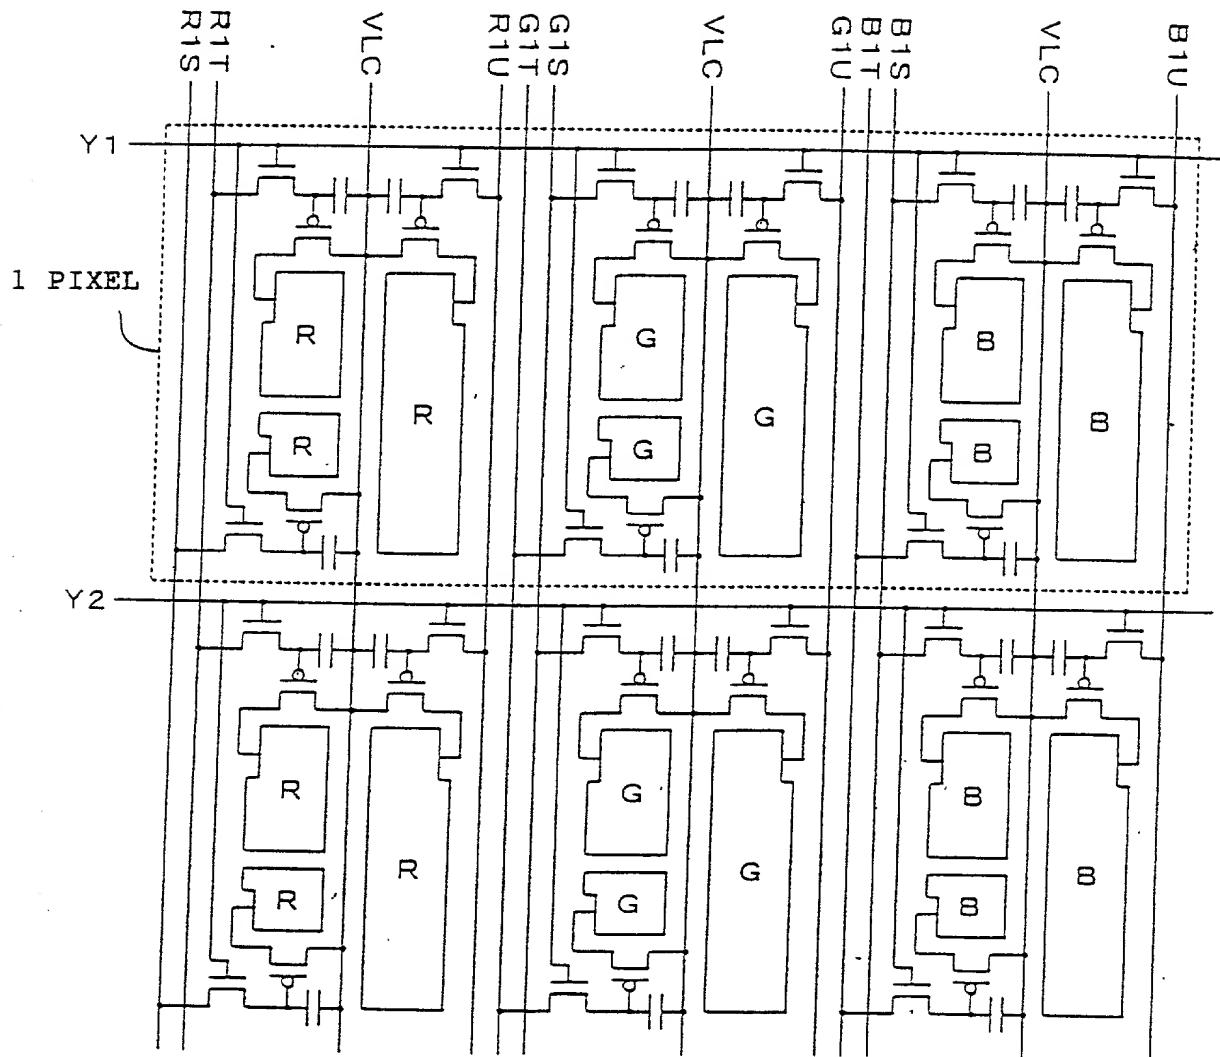


FIG.11

09/868322

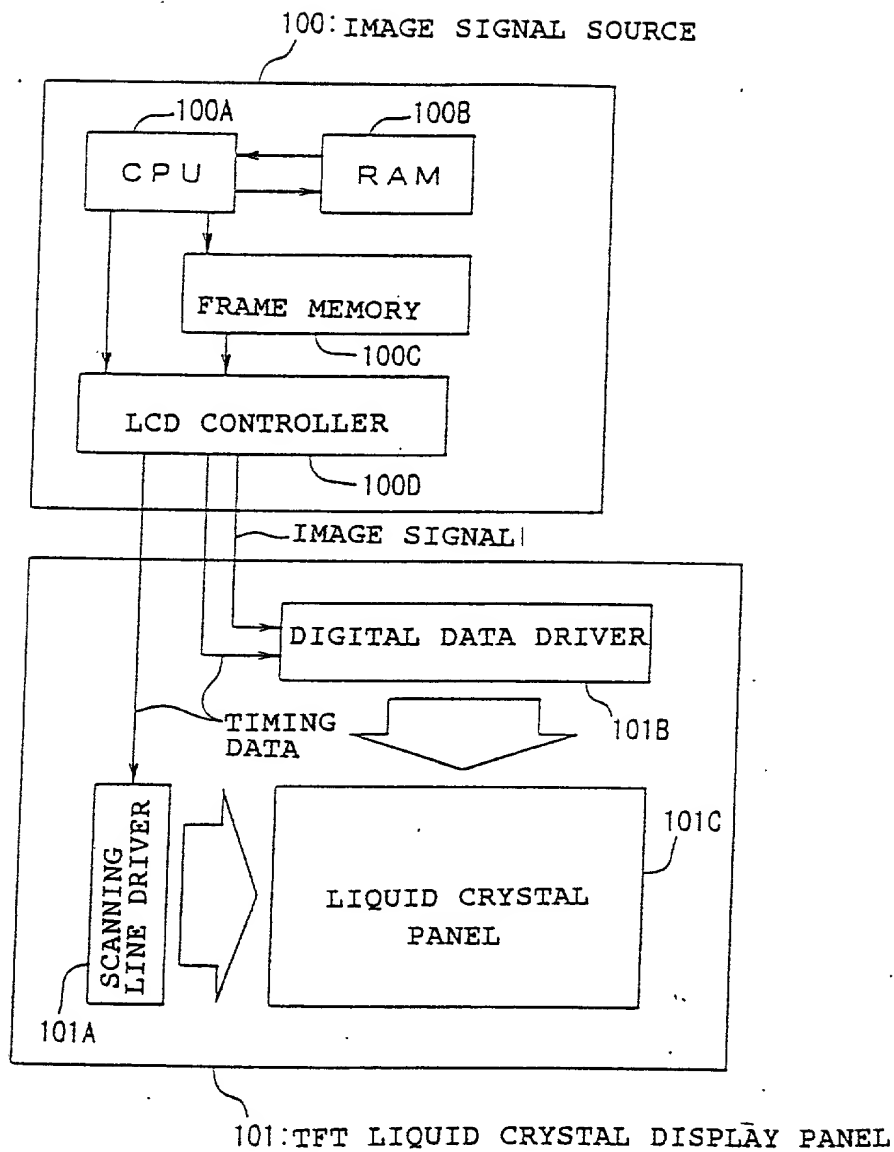

Seiko Epson Ref. No.: F005511US00

Attorney's Ref. No.: 109503

**Declaration and Power of Attorney For Patent Application**

特許出願宣言書及び委任状

**Japanese Language Declaration**

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は、下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

**表示装置****DISPLAY DEVICE**

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ \_\_\_\_\_に提出され、米国出願番号または特許協定条約 国際出願番号を \_\_\_\_\_ とし、（該当する場合） \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_ as United States Application Number or PCT International Application Number \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.



## Japanese Language Declaration

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも1ヶ国を指定している特許協力条約365条(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

## Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

11-294996(P)

Japan

18/October/1999

(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)



(Number)

(Country)

(Day/Month/Year Filed)

(番号)

(国名)

(出願年月日)



私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

(Application No.)

(Filing Date)

(Application No.)

(Filing Date)

(出願番号)

(出願日)

(出願番号)

(出願日)

私は下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

PCT/JP00/07175

16/October/2000

Pending

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

(Application No.)

(Filing Date)

(Status: Patented, Pending, Abandoned)

(出願番号)

(出願日)

(現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私が入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**Japanese Language Declaration**

(日本語宣言書)

委任状： 私は、下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

James A. Oliff, (Reg. 27,075)  
 William P. Berridge, (Reg. 30,024)  
 Kirk M. Hudson, (Reg. 27,562)  
 Thomas J. Pardini, (Reg. 30,411)  
 Edward P. Walker, (Reg. 31,450)  
 Robert A. Miller, (Reg. 32,771)  
 Mario A. Costantino, (Reg. 33,565)  
 Caroline D. Dennison, (Reg. 34,494)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

James A. Oliff, (Reg. 27,075)  
 William P. Berridge, (Reg. 30,024)  
 Kirk M. Hudson, (Reg. 27,562)  
 Thomas J. Pardini, (Reg. 30,411)  
 Edward P. Walker, (Reg. 31,450)  
 Robert A. Miller, (Reg. 32,771)  
 Mario A. Costantino, (Reg. 33,565)  
 Caroline D. Dennison, (Reg. 34,494)

## 書類送付先：

OLIFF & BERRIDGE, PLC  
 P.O. Box 19928  
 Alexandria, Virginia 22320

## Send Correspondence to:

OLIFF & BERRIDGE, PLC  
P.O. Box 19928  
Alexandria, Virginia 22320

## 直接電話連絡先：(名前及び電話番号)

OLIFF & BERRIDGE, PLC  
 (703) 836-6400

## Direct Telephone Calls to: (name and telephone number)

OLIFF & BERRIDGE, PLC  
 (703) 836-6400

## 唯一または第一発明者名

松枝 洋二郎

## Full name of sole or first inventor

Yojiro MATSUEDA

## 発明者の署名

松枝 洋二郎 日付 2001年6月13日

## Inventor's signature

Yojiro Matsueda June 13, 2001

## Date

## 住所

日本国, 長野県, 茅野市

## Residence

Chino-shi, Nagano-ken, Japan

## 国籍

日本

## Citizenship

Japan

## 私書箱

392-8502 日本国長野県諏訪市大和3丁目3番5号  
 セイコーエプソン株式会社内

## Post Office Address

c/o Seiko Epson Corporation  
 3-5, Owa 3-chome, Suwa-shi, Nagano-ken 392-8502 Japan

## 第二共同発明者

## Full name of second joint inventor, if any

## 第二共同発明者の署名

日付

## Second inventor's signature

## Date

## 住所

日本国, \_\_\_\_\_, \_\_\_\_\_

## Residence

\_\_\_\_\_, \_\_\_\_\_, Japan

## 国籍

## Citizenship

## 私書箱

## Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)